

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com

Project Name:	AIA #
Item #:	
Model #: Qty:	SIS#
Approval:	

Refrigerated Self-Serve Slim-Line High Profile Specialty Merchandiser – 78"H X 24" W

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits.



Model RSSL478SC Shown

2 ½" (63.5mm) or 4" (101.6mm) Casters (Self Contained Models Only) Remote Refrigeration with Condensate Pump (EEV Included)	Special Exterior Laminate Finish Skirt with Casters or Legs Stainless Steel Exterior Finish Cord and Plug (Self Contained Models White Interior (Including Shelving) Only) Cord Included Additional Lighted (LED) Shelf Condensate Pump Deli Meat Pegs Condensate Evaporator Assembly Security Night Cover (Field Install) (Separate 120V, 20A LED Lights Below Shelves Circuit Required) (Remote Only)	OPTIONAL ACCESSORIES Legs 6" (152mm)
---	---	---------------------------------------

*Additional options available on the website and price list.











WARRANTY* One year Parts and Labor 2nd thru 5th year part only service compressor (ILSA and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

MODEL	DIMENSIONS (Includes End Panels)
☐ RSSL378SC	36 x 24 x 78 (in) 914 x 607 x 1981 (mm)
☐ RSSL478SC	47.25 x 24 x 78 (in) 1200 x 607 x 1981 (mm)
☐ RSSL578SC	59.25 x 24 x 78 (in) 1505 x 607 x 1981 (mm)
☐ RSSL678SC	71.25 x 24 x 78 (in) 1810 x 607 x 1981 (mm)

STANDARD FEATURES

Model Features

- Welded powder coated steel base fabrication
- Choice of six standard laminates on exterior
- Black metal front grill and galvanized steel back
- Silver Trim
- Stainless steel display deck, glass and black interior ends, black interior back panel
- Moisture resistant end panel construction with field replaceable tempered thermo-pane glass
- Front air intake and discharge
- Energy saving night curtain
- Cord and Plug
- Adjustable Leg Levelers

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate heater provided for a totally self-contained system (3.3°-4.4°C)

Note: Case temperature will vary if the air curtain is disrupted.

- Insulated with high-density urethane foam
- Thermometer
- Refrigeration controls maintain 38°-40°F
- R449a refrigerant (R448a/R449a in Remote Applications)

Shelving

 Four tiers of adjustable black metal shelves with price tag molding. Shelves can be flat or slanted downwards at 10°

Lighting

- 3500K LED top light
- DLC certified, IP 65 rated

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

AIA#


Refrigerated Self-Serve Slim-Line High Profile Specialty Merchandiser – 78"H X 24" W

SIS#

Product Specifications

Intended Environment: Type I (Self Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity. Type II (Remote) - Designed to operate in maximum ambient conditions of 80°F (24°C) and 55% relative humidity

Zone	Intended Product To Be Displayed	Avg prod temp °F / °C
All	Packaged Refrigerated Products	38°F/(3.3°C)

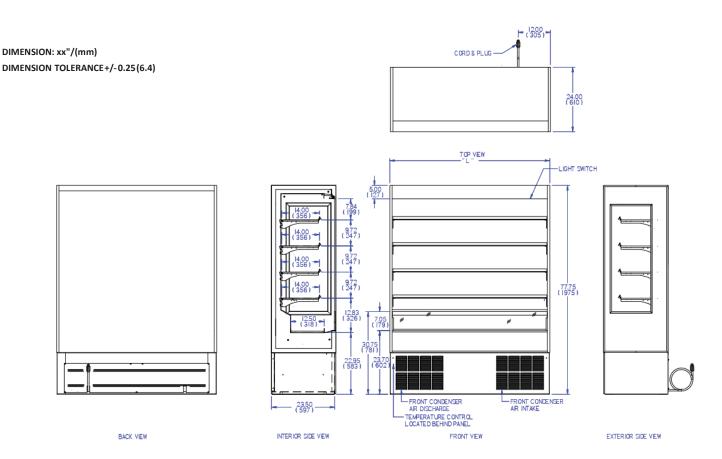

MODEL	DIMENSIONS				TIERS	SHIPPING T		SELF CONTAINED		OPTIONAL NEMA PLUG	REMOTE		BTU @
MUDEL	L	D	н	UNITS	HERS	LBS	KILO	VOLTAGE	AMPS	CONFIG (SC)	VOLTAGE	AMPS	20 °F
RSSL378SC	36	24	78	in	4	795 3	2/0	120/60/1	MAX FUSE 20	5-20P	120/60/1	MAX FUSE 15	5400
	914	607	1981	mm			360						
RSSL478SC	47.25	24	78	in	4	885 401	/01	208-240/60/1	MAX FUSE 20	6-20P	208-240/60/1	MAX FUSE 15	7500
K33L4763C	1200	607	1981	mm			401						
DCCL FROCO	59.25	24	78	in	4	1120	507	208-240/60/1	MAX FUSE 20	6-20P	208-240/60/1	MAX FUSE 15	9000
RSSL578SC	1505	607	1981	mm			307						
RSSL678SC	71.25	24	78	in	4	1180	E2E	200 2/0//0/1	MAX FUSE 20	6-20P	208-240/60/1	MAX FUSE 15	10500
	1810	607	1981	mm			535	208-240/60/1					

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.









Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com