

						IFS

A Standex Company

215 Federal Avenue Belleville Wisconsin 53508-9201

Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com Website: Federalind.com

Project Name:	AIA#
Item #:	
Model #: Qty:	SIS#
Approval:	

Refrigerated Self-Serve High Profile Specialty Merchandiser - 60" H x 35" W

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits.



Model RSSM360SC Shown

OPTIONAL ACCESSORIES Special Exterior Laminate Finish Legs, 6", (152mm) White Interior (Including Shelving) Square End Profile Stainless Steel Exterior Finish Skirt with Casters or Legs Stainless Steel Interior Back ☐ Cord & Plug (Self-Contained Models Stainless Steel Shelves Reflective End Glass Joining Kit for Continuous Line-Ups Deli Meat Pegs Condensate Evaporator Assembly Sliding or Hinged Rear Access Doors (Field Install) (Separate 120V,20A (Sliding not available on 360) Circuit Required) (Remote Only) Roll-up Security Cover Remote Refrigeration with (Square End Profile) Condensate Pump (R449A Removable Security Cover Refrigerant) (EEV Included) 3rd Lighted (LED) Shelf Rear Air Inlet & Outlet (Front Knee 2 1/2" (63.5 mm) or 4" (101.6 mm) Casters Wall Application) (Self Contained Models Only) Cord Included













Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.

MODEL	DIMENSIONS (Includes End Panels)				
□ RSSM360SC	36 x 35.25 x 60.25 (in) 914 x 895 x 1530 (mm)				
□ RSSM460SC	47.25 x 35.25 x 60.25 (in) 1200 x 895 x 1530 (mm)				
□ RSSM560SC	59.25 x 35.25 x 60.25 (in) 1505 x 895 x 1530 (mm)				
□ RSSM660SC	71.25 x 35.25 x 60.25 (in) 1810 x 895 x 1530 (mm)				

STANDARD FEATURES

Model Features

- Welded powder coated steel base fabrication
- Choice of six standard laminates on exterior
- Black metal front grill and galvanized steel back
- Silver trim
- Stainless steel display deck, glass and black interior ends, black interior back panel
- Moisture resistant end panel construction with field replaceable tempered thermo-pane glass
- Front air intake/ front and rear air discharge
- Energy saving night curtain
- Adjustable Leg Levelers
- Condenser Air Filter

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate heater provided for a totally elf-contained system
- Refrigeration controls maintain 38°-40°F (3.3°-4.4°C) Note: Case temperature will vary if the air curtain is disrupted.
- Insulated with high-density urethane foam
- Thermometer
- R449a refrigerant

Shelving

 Two tiers of adjustable black metal shelves with price tag molding. Shelves can be flat or slanted downwards at 10°

Lighting

- 3500K LED top light
- DLC certified, IP 65 rated

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

AIA#

Refrigerated Self-Serve High Profile Specialty Merchandiser - 60"H x 35"W

SIS#


Product Specifications

Intended Environment: Type I (Self Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity. Type II (Remote) - Designed to operate in maximum ambient conditions of 80°F (24°C) and 55% relative humidity.

Zone Intended product to be displayed

All Packaged refrigerated products

38°F / (3.3°C)

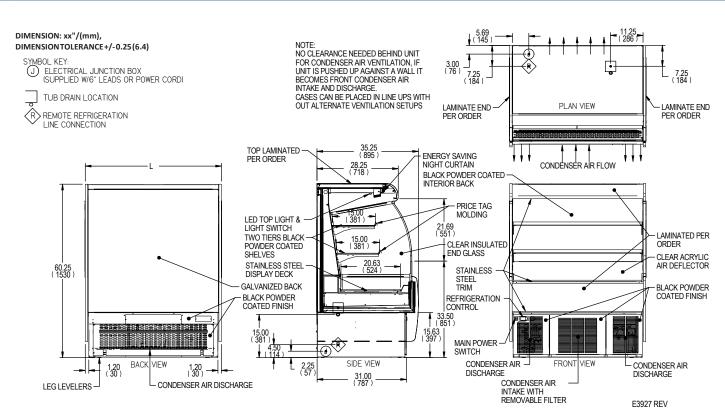

MODEL	DIMENSIONS			TIERS	SHIPPING WHT		SELF CONTAINED		OPTIONAL NEMA PLUG	REMOTE		вти	
	L	D	н	UNITS		LBS	KILO	VOLTAGE	AMPS	CONFIG (SC)	VOLTAGE	AMPS	@ 20°F
DCCM2/0CC	36	35.25	60.25	in.	2	550 2	240	200 2/0//0/1	MAX FUSE 20	NEMA 6-20P	208-240/60/1	MAX FUSE 15	5400
RSSM360SC	914	895	1530	mm.			249	208-240/60/1					
RSSM460SC	47.25	35.25	60.25	in.	2	650	295	208-240/60/1	MAX FUSE 20	NEMA 6-20P	208-240/60/1	MAX FUSE 15	7500
K35M4003C	1200	895	1530	mm.									
RSSM560SC	59.25	35.25	60.25	in.	2	800	363	208-240/60/1	MAX FUSE 30	NEMA 6-20P	208-240/60/1	MAX FUSE 15	9000
R55M56USC	1505	895	1530	mm.			363						
RSSM660SC	71.25	35.25	60.25	in.	2	900	408	208-240/60/1	MAX FUSE 30	NEMA 6-20P	208-240/60/1	MAX FUSE 15	10500
Jenopiacen	1810	895	1530	mm.	2		400						

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.









FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com