

APPLICATION:

JOB NAME:


PRODUCT NAME:
 PRE-RINSE SPRING SINGLE WALL MOUNT
 WITH WALL BRACKET & ADD-ON FAUCET

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

QUANTITY: _____ **ITEM NO.** _____

MODEL:

34568 WITH 6" SWING SPOUT
 34576 WITH 8" SWING SPOUT
 34585 WITH 10" SWING SPOUT
 34592 WITH 12" SWING SPOUT
 34606 WITH 14" SWING SPOUT
 34614 WITH 16" SWING SPOUT

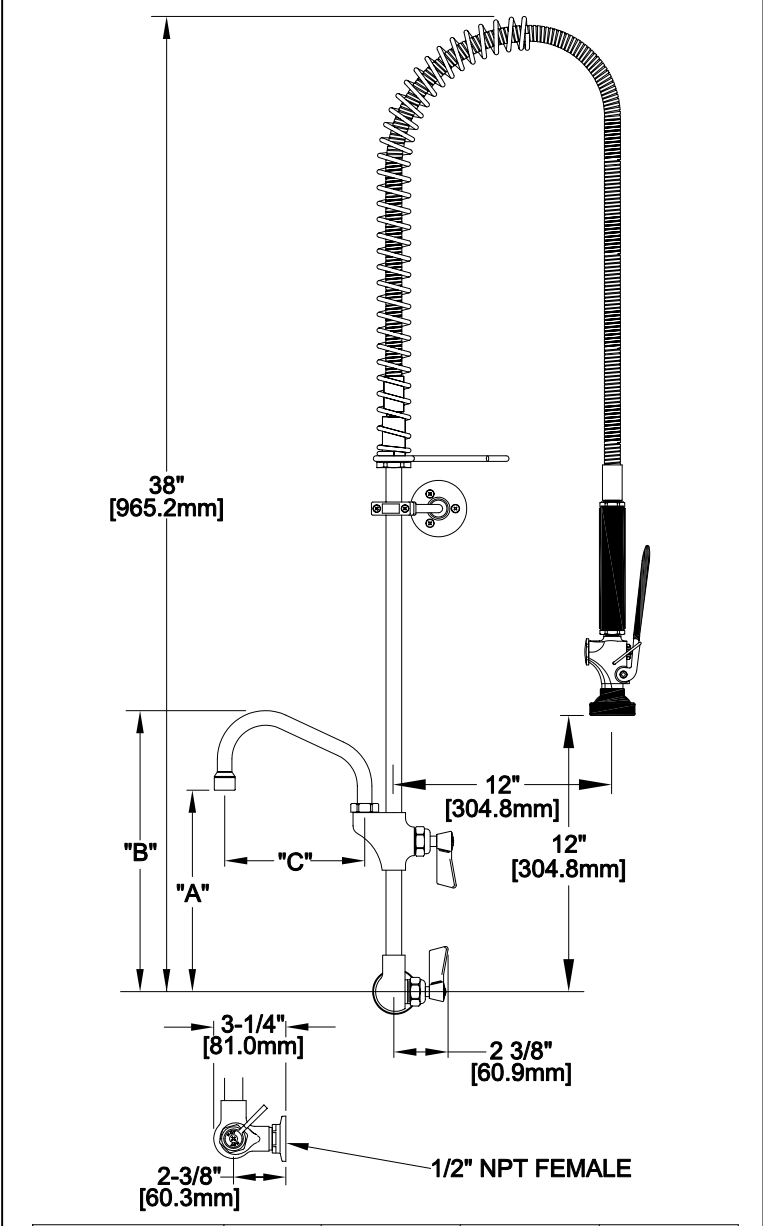

OPTIONS OR MODIFICATIONS:

SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
 IN-LINE DUAL CHECK VALVE
 BRUSH
 VANDAL RESISTANT KIT
 HANDLES (CROSS OR WRIST) CIRCLE STYLE
 OTHER _____

FEATURES:

MAIN CONTROL VALVE
 * SINGLE WALL MOUNT
 * INTERNAL SPRING LOADED CHECK VALVES
 * SWIVELLING SEAT DISKS
 * STEM - RIGHT HAND SWIVEL
 * HOT AND COLD INDEX BUTTONS INCLUDED
 * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

ADD-ON CONTROL VALVE
 * STEM - RIGHT HAND SWIVEL
 * HOT INDEX BUTTON
 * SWIVELLING SEAT DISKS
 * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

HOSE
 * 36" LENGTH
 * STAINLESS STEEL END FITTINGS
 * STAINLESS STEEL EXTERNAL JACKET
 * 3-PLY FIBER REINFORCED INTERNAL RUBBER

HOSE
 * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE
 * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
 * CLEANS FASTER - TEST PROVEN
 * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK

* INTERCHANGEABLE - FITS ALL BRANDS

WALL BRACKET
 * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS
 * TEMP: 40°F MIN. TO 140°F MAX. STATIC
 * PRESSURE 200 PSI MAX. STATIC
 * SHIPPING WEIGHT: 12.0 LBS

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
<p>1/2" NPT MALE*</p> <p>*NIPPLE NOT INCLUDED</p>	34568	8-3/4" [221.3mm]	12-3/8" [313.3mm]	6" [152.4mm]
	34576	9" [227.6mm]	12-7/8" [326.0mm]	8" [203.2mm]
	34584	9-5/8" [243.5mm]	13-3/8" [340.3mm]	10" [254.0mm]
	34592	10-1/4" [259.4mm]	13-7/8" [351.4mm]	12" [304.8mm]
	34606	10-5/8" [275.0mm]	14-3/4" [373.7mm]	14" [355.6mm]
	34614	11-1/2" [292.1mm]	15-3/8" [389.5mm]	16" [406.4mm]