



7-1/2" - 8-1/2" ADJ. WALL

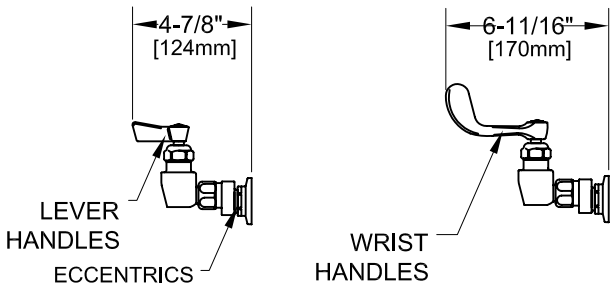

ROUGH-IN:



PRODUCT NAME: STAINLESS STEEL  
8" ADJ. WALL PRE-RINSE WITH ADD-ON

MODEL:

- 53449 6" SWING SPOUT W/ LEVER HANDLES
- 53457 8" SWING SPOUT W/ LEVER HANDLES
- 53465 10" SWING SPOUT W/ LEVER HANDLES
- 53473 12" SWING SPOUT W/ LEVER HANDLES
- 54631 14" SWING SPOUT W/ LEVER HANDLES
- 53503 16" SWING SPOUT W/ LEVER HANDLES
- 74020 6" SWING SPOUT W/ WRIST HANDLES
- 74039 8" SWING SPOUT W/ WRIST HANDLES
- 74047 10" SWING SPOUT W/ WRIST HANDLES
- 74055 12" SWING SPOUT W/ WRIST HANDLES
- 74063 14" SWING SPOUT W/ WRIST HANDLES
- 74071 16" SWING SPOUT W/ WRIST HANDLES

FEATURES:

MAIN CONTROL VALVE

- \* WALL MOUNT
- \* ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
- \* INTERNAL SPRING LOADED CHECK VALVES
- \* SWIVELLING SEAT DISKS
- \* HOT SIDE STEM - RIGHT HAND CHECK
- \* COLD SIDE STEM - LEFT HAND CHECK
- \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

ADD-ON CONTROL VALVE

- \* STEM - RIGHT HAND SWIVEL
- \* HOT INDEX BUTTON
- \* SWIVELLING SEAT DISKS
- \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

HOSE

- \* 36" LENGTH
- \* STAINLESS STEEL END FITTINGS
- \* STAINLESS STEEL EXTERNAL JACKET
- \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE

- \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
- \* CLEANS FASTER - TEST PROVEN
- \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
- \* INTERCHANGEABLE - FITS ALL BRANDS

WALL BRACKET

- \* ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS

- \* TEMP: 40°F MIN. TO 140°F MAX. STATIC
- \* PRESSURE 200 PSI MAX. STATIC
- \* SHIPPING WEIGHT: 15.0 LBS

\* NSF 61-9 APPROVED & LISTED  
[www.truesdail.com](http://www.truesdail.com)



FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
[information@fisher-mfg.com](mailto:information@fisher-mfg.com) - [www.fisher-mfg.com](http://www.fisher-mfg.com)