



8" C/C BACKSPASH FAUCET

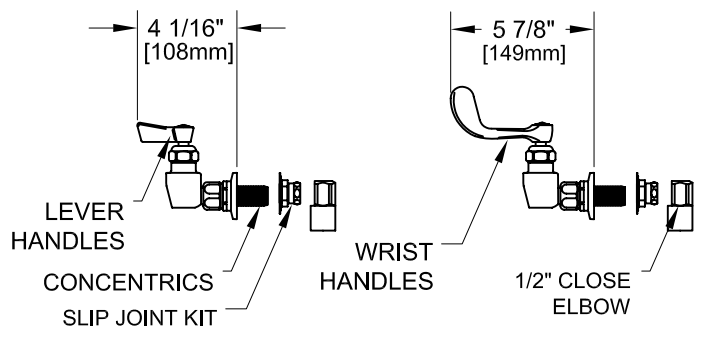

ROUGH-IN:

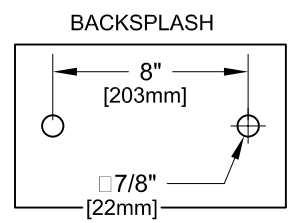

PRODUCT NAME: STAINLESS STEEL  
8" BACKSPASH PRE-RINSE WITH  
ADD-ON & ELBOWS

- MODEL:
- 68152 6" SWING SPOUT W/ LEVER HANDLES
  - 68160 8" SWING SPOUT W/ LEVER HANDLES
  - 68179 10" SWING SPOUT W/ LEVER HANDLES
  - 68187 12" SWING SPOUT W/ LEVER HANDLES
  - 68195 14" SWING SPOUT W/ LEVER HANDLES
  - 68209 16" SWING SPOUT W/ LEVER HANDLES
  - 74721 6" SWING SPOUT W/ WRIST HANDLES
  - 74748 8" SWING SPOUT W/ WRIST HANDLES
  - 74756 10" SWING SPOUT W/ WRIST HANDLES
  - 74764 12" SWING SPOUT W/ WRIST HANDLES
  - 74772 14" SWING SPOUT W/ WRIST HANDLES
  - 74780 16" SWING SPOUT W/ WRIST HANDLES

- FEATURES:
- CONTROL VALVE
- \* 8" C/C BACKSPASH MOUNT
  - \* CONCENTRICS
  - \* INTERNAL SPRING LOADED CHECK VALVES
  - \* SWIVELLING SEAT DISKS
  - \* HOT SIDE STEM - RIGHT HAND
  - \* COLD SIDE STEM - LEFT HAND
  - \* STAINLESS STEEL SEATS
  - \* STAINLESS STEEL SEAT SCREWS
  - \* STAINLESS STEEL HANDLE SCREWS
  - \* 1/2" CLOSE ELBOWS

- ADD-ON CONTROL VALVE
- \* STEM - RIGHT HAND SWIVEL
  - \* HOT INDEX BUTTON
  - \* SWIVELLING SEAT DISKS
  - \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

- HOSE
- \* 36" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
  - \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS

- ULTRA SPRAY VALVE
- \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
  - \* CLEANS FASTER - TEST PROVEN
  - \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
  - \* INTERCHANGEABLE - FITS ALL BRANDS

- WALL BRACKET
- \* ADJUSTS FROM 2" TO 12"

- SYSTEM LIMITS
- \* TEMP: 40°F MIN. TO 140°F MAX. STATIC
  - \* PRESSURE 200 PSI MAX. STATIC
  - \* SHIPPING WEIGHT: 15.0 LBS

\* NSF 61-9 APPROVED & LISTED  
www.truesdail.com



FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
information@fisher-mfg.com - www.fisher-mfg.com