

APPLICATION:


PRODUCT NAME:  
**POT FILLER HOSE STYLE  
 8" C/C ADJUSTABLE WALL MOUNT**

JOB NAME:

QUANTITY:                      ITEM NO.:

■ 83984 SPECIAL CONFIGURATION  
 (CHECK BASE MODEL AND OPTIONS)

MODEL:  
 ■ 2250

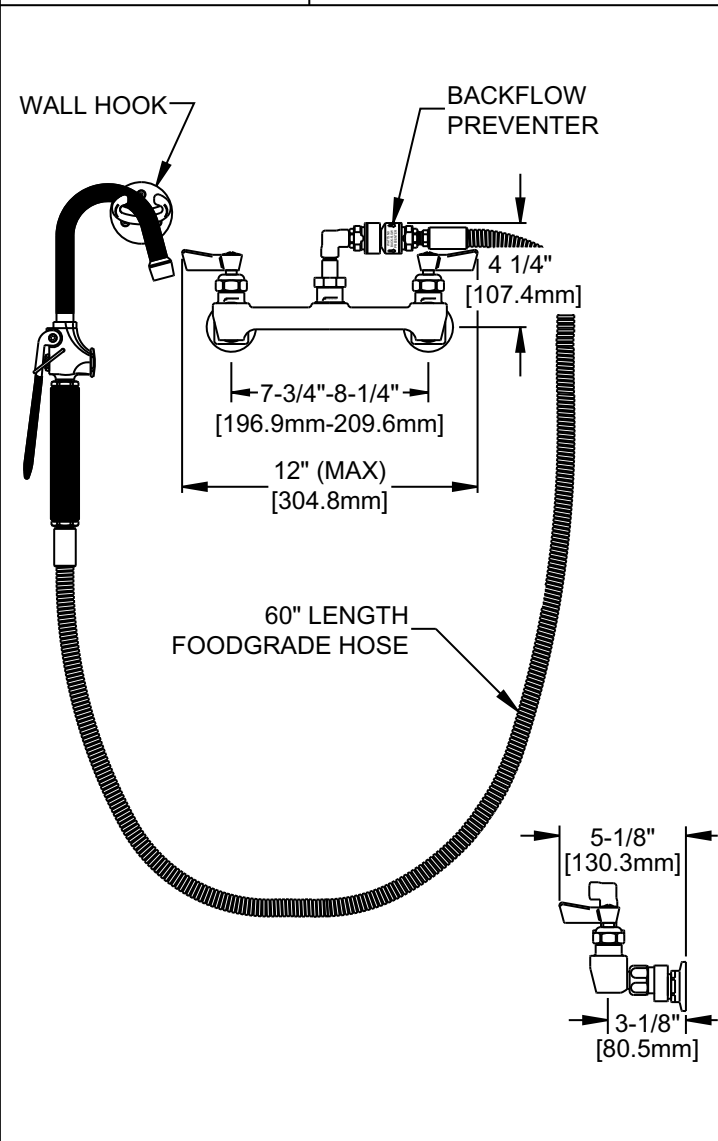

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
  - ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE LGTH
  - BACKFLOW PREVENTER
  - PIPE HOOK
  - NIPPLES
  - ELBOWS
  - VANDAL RESISTANT KIT
  - HANDLES (CROSS OR WRIST) CIRCLE STYLE
  - OTHER \_\_\_\_\_

- FEATURES:
- CONTROL VALVE**
- \* 8" C/C ADJUSTABLE WALL MOUNT
  - \* ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4"
  - \* INTERNAL SPRING LOADED CHECK VALVES
  - \* SWIVELING SEAT DISKS
  - \* HOT SIDE STEM - RIGHT HAND
  - \* COLD SIDE STEM - LEFT HAND
  - \* STAINLESS STEEL SEATS
  - \* STAINLESS STEEL SEAT SCREWS
  - \* STAINLESS STEEL HANDLE SCREWS
  - \* 360° TURNING RADIUS SWIVEL ELBOW


- INLINE DUAL CHECK VALVE**
- \* ATMOSPHERIC VENT
  - \* FOR IN-LINE CONTINUOUS PRESSURE APPLICATIONS
  - \* DOUBLE CHECK DESIGN

- HOSE**
- \* 60" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE

- POT FILLER VALVE**
- \* NON SCRATCHING/ MARRING TUBE
  - \* 5.00 GPM AT 80 PSI
  - \* AERATED STREAM

- SYSTEM LIMITS**
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE 200 PSI MAX. STATIC

**SHIPPING WEIGHT**  
 \* 9.0 LBS

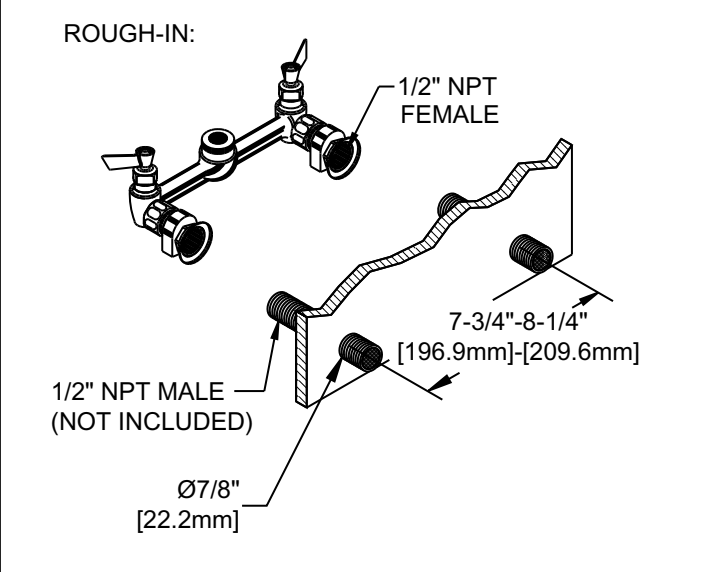

ANSI/A112.18.1M, ANSI/NSF 61.9

**FISHER**

FISHER MANUFACTURING COMPANY  
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
 information@fisher-mfg.com - www.fisher-mfg.com