

APPLICATION:

JOB NAME:

PRODUCT NAME:
UTILITY SPRAY HOSE ASSEMBLY


SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:
 9158

OPTIONS OR MODIFICATIONS:
 OTHER _____

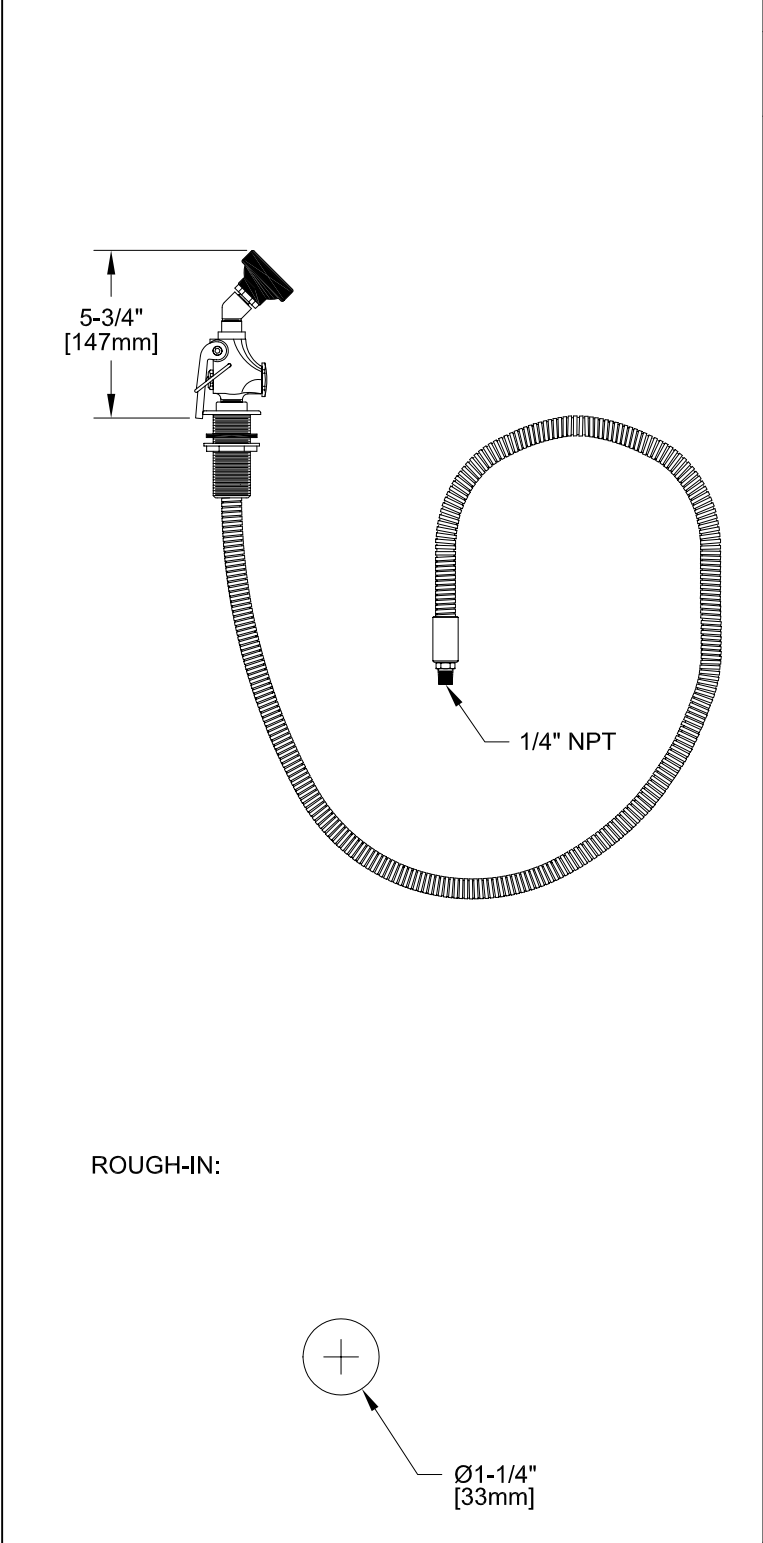

FEATURES

- HOSE
- * 60" LENGTH
 - * STAINLESS STEEL END FITTINGS
 - * STAINLESS STEEL EXTERNAL JACKET
 - * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
 - * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

- UTILITY SPRAY VALVE
- * NOZZLE THREADED INTO VALVE
 - * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
 - * SHOWER SPRAY PATTERN
 - * 45° ANGLED HEAD
 - * FITS ALL BRANDS
 - * 2.65 GPM AT 80 PSI

- DECK FLANGE
- * SOLID BRASS CONSTRUCTION
 - * INTERNAL TAPER TO ALLOW VALVE TO STAND UP

- SYSTEM LIMITS
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE: 200 PSI MAX. STATIC

- SHIPPING WEIGHT
- * 5.0 LBS