

automatic ice bagging and dispensing system



Model configurations		
Ice storage capacity	Voltage	Item number
650 lb (295 kg)	220 V/60/1	DB650SA
	230 V/50/1	EDB650SA

Features

Fast, labor saving ice dispense

- store up to 650 lb (295 kg) of ice
- eliminates the need to shovel or scoop ice from bin
- fill up to 8 x 8 lb (3.6 kg) bags a minute
- automatic agitation cycle prevents ice from forming bridges
- push-button actuation automatically dispenses ice at a rate of up to 75 lb (34 kg) per minute

Fresher ice

- first ice in is first ice out

Ice compatibility

- dispenses most cube ice up to 1.00" (2.54 cm) and customer preferred Chewblet® ice into most carts and containers

Durable, user-friendly construction

- bag stand adjusts to fit up to 20 lb (9 kg) ice bags and can be used to fill containers such as Totes™ ice carrier or small ice coolers
- bag stand removes to fit carts or coolers up to 28.00" (71.1 cm) high
- easy-to-use controls with push button or time dispense
- bag opener blows bags open automatically
- corrosion-resistant poly bin
- dispensing components are easily removed for cleaning
- removable, lockable clear window prevents unauthorized access to ice and provides full access for cleaning
- access from front and side for maintenance
- bag holder pins quickly adjust for use with wire-wicket ice bags with 5.00" (12.7 cm) to 10.00" (25.4 cm) holes on center

Warranty

- 2 years parts and labor
- visit <u>follettice.com</u> for complete warranty details

Includes:

- 125 x 8 lb (3.6 kg) ice bags and reorder information
- bag stand
- cleaning brush and bracket

Accessories

8 lb (3.6 kg) ice bags (item# 00116434)

20 lb (9 kg) ice bags (item# 00138370)

Bostitch® P-7 C-ring plier for closing bags (item# 00137711)

Staples, aluminum blunt-end C-rings for Bostitch P-7 plier (item# 00137729)

Foot pedal (item# 00932517)

Jug and cooler filling kit (item # 00979013)

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com



Specification Maximum bin capacity¹ 650 lb (295 kg) Cubic capacity 20 cu ft (0.57 cu m) W1 Width 33.75" (85.7 cm) W2 Width, bin top 30.38" (77.1 cm) D1 Depth, without bag stand 46.75" (118.7 cm) D2 Depth, bin top 31.25" (79.4 cm) D3 Depth, with bag stand 48.25" (122.6 cm) **H1** Height 66.50" (168.9 cm) adjustable W3 Drip tray width 16.75" (42.5 cm) **D4** Drip tray depth 10.12" (25.7 cm) L1 Dispense clearance 28.00" (71.1 cm) **L2** Bag stand dispense clearance 26.00" (66.0 cm) Installation clearance 34.25" (87.0 cm) wide door access Service clearance 12.00" (30.5 cm) right side C1 Electrical² 2.5 amps, max. fuse 15 amps. 7' 220 V/60/1 (2.1 m) cord with NEMA 6-15 plug. C2 Electrical² 2.4 amps, max. fuse 15 amps. Cord only. Wire in accordance with 230 V/50/1 all local codes. L3 Drain³ 1.00" FPT Dispense rate up to 75 lb (34 kg) per minute Ice compatibility non-flake up to 1.00" (2.54 cm) square Shipping weight 460 lb (205 kg)

SHORT FORM SPECIFICATION (Choose one): Automatic ice storage and dispensing system to be Follett _______ 220 V/60 Hz DB650SA or ______ 230/50 Hz EDB650SA with elevated bin and base. Bin to hold up to 650 lb (295 kg) of ice. Dispense rate to be approximately 75 lb (34 kg)/min. Two position ice discharge chute with selector lever allows filling of bags or other containers. Lockable clear inspection window shall have interlock switch to prevent operation if window is removed. Hopper to be constructed of double wall rotationally molded polyethylene insulated with CARB compliant non-HFC foam. Heavy-duty agitation system includes two stainless steel agitators and motors. Dispense auger to be rotationally molded plastic, driven by 1/4 HP motor. Activation of the dispensing function shall be controlled by push-button. Dispenser shall be equipped with holding pins for bags, time dispense, and blower function for automatically opening bags. DB650SA is NSF, UL and cUL listed.

Notes:


- Computed on cubic volume of bin. Does not reflect voids that can occur due to pyramiding.
- ² C1, C2 within 7' (2.1 m) from right rear corner.


NOTES: For indoor use only

Follett recommends installation of a floor drain with grate with all ice storage bins.

Local food regulations vary. Please check with your local authorities for requirements for packaged ice.

Dimensional drawing

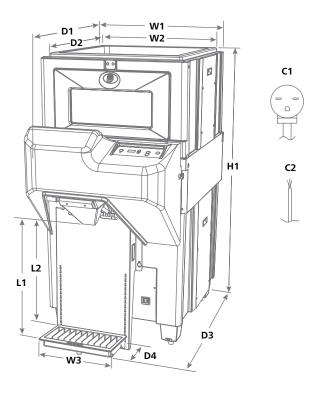

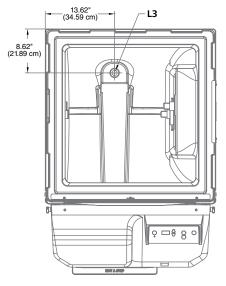

Bostitch is a registered trademark of Stanley Black and Decker.

ICE PRO and TOTES are trademarks of Follett LLC.

CHEWBLET and FOLLETT are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Ice Pro DB650 series









