



DI-MDR30
Top view



DI-MDR30
Side view



Intertek
4004503
Conforms to ANSI/NSF STD 2



DI-MDR30
Shown installed and dressed
(1/9th pans and bottles not included)

To view cleaning and care instructions, please visit:
https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Mixology Drink Rails

DI-MDR24, DI-MDR30, DI-MDR36

Standard Features

- Stainless steel top and interior liner
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner and acts as thermal barrier to prevent heat transfer
- One-piece top includes drain pan with removable perforated insert
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Stainless steel exterior wrap
- 4" deep well liner is 3-5/8" front-to-back
- Designed to hold up to 3-1/2" wide bottles or 1/9th pans
- Installation kit includes: 10' of clear vinyl drain tube, seven - 4" Ty-wraps, one - 1/2" PVC tee, one - 1/2" nylon elbow, and two drainline splicers
- Install by making a notched cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

Specifications

Drains

- 1/2" welded tailpiece

Liner

- 4" deep and 3-3/4" front-to-back

Cut-out Dimensions

The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension as listed below:

- Model DI-MDR24 - 10" by 22-1/4"
- Model DI-MDR30 - 10" by 28-1/4"
- Model DI-MDR36 - 10" by 34-1/4"

Materials

- 22 gauge galvanized steel parts include: exterior wrap and bottom
- 20 gauge stainless steel parts include: interior liner and perforated insert
- 18 gauge stainless steel parts include: top and drain pan

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


Drop-In Mixology Drink Rails

Dimensional Information


X = Left-to-right dimension is 24", 30", or 36"

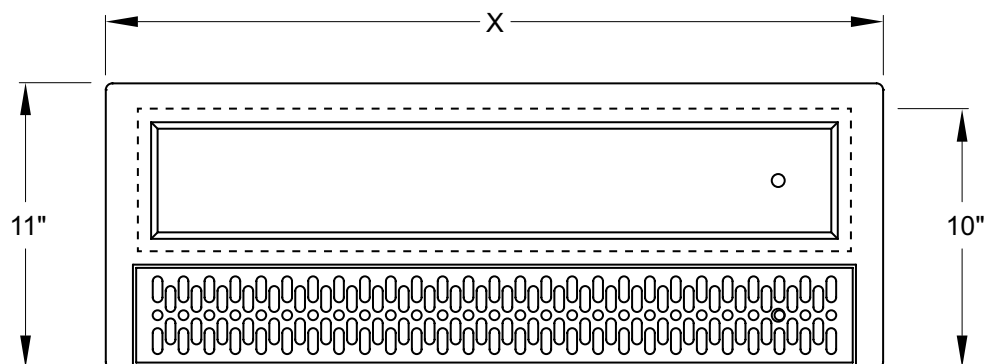

PLAN VIEW

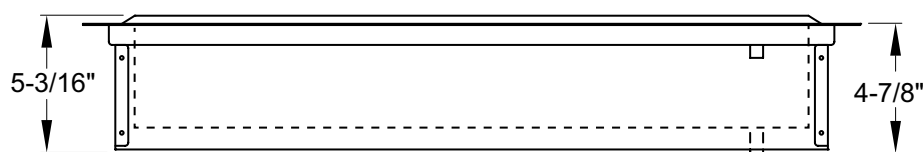

FRONT VIEW

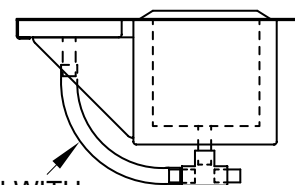


SHOWN WITH DRAIN TUBE CONNECTED

SIDE ELEVATION

Cut-Out Details

The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension.

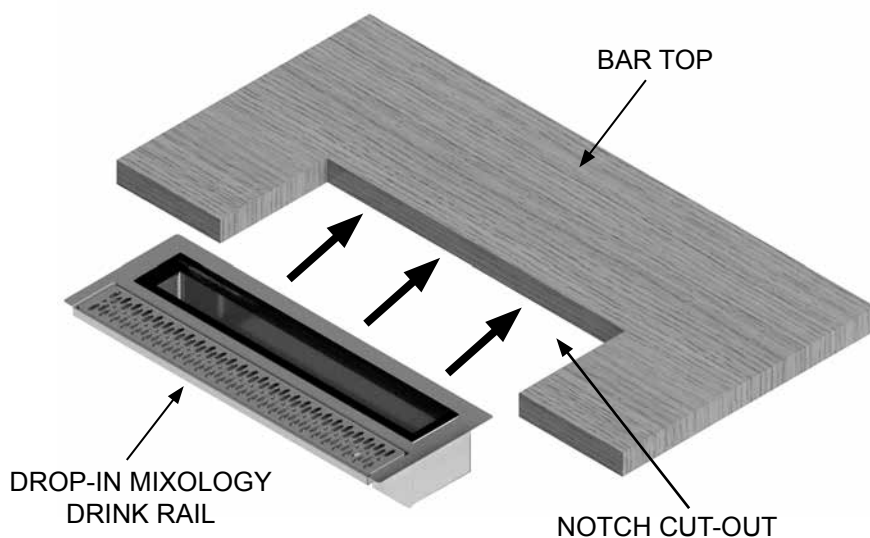

MODEL	X WIDTH =	LEFT-TO-RIGHT CUTOUT
DI-MDR24	24"	22-1/4"
DI-MDR30	30"	28-1/4"
DI-MDR36	36"	34-1/4"