



GDU-16x48
 Factory mounted on cooler cabinet



GDU-18x42
 Field Installed Version

To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications

Drains

- 1" tailpiece - exits through the bottom.
- For factory mounted units on self-contained coolers the plumbing is ran through the cooler and stubs out beneath the compressor compartment. Field connections must be made at that point.
- For factory mounted units on remote coolers or dry storage cabinets, the factory supplies a 1" drain line and two elbows for running the drain line out of the cabinet. If the desired location for the drain line exit is specified, it will be hooked-up at the factory. Field connections must be made at that point.

Materials

- 20 gauge stainless steel parts include: sides, center partition, bottom inserts, glass trim pieces, and cooler top or field installed drain pan
- 1/2" thick double pane glass parts include: front and back panels

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Glass Ice Display Units

GDU-12X*, GDU-16X*, GDU-18X*, GDU-24X*

* Reflects length of unit in inches from the following options:
 24, 30, 36, 42, 48, 54, 60, 66, 72, 78, 84, 90, 96, 102, or 108

Standard Features

- Stainless steel insulated end panels (units larger than 54" include center partition)
- Field installed units include a stainless steel insulated drain pan to mount to existing counter top
- Factory installed units include a special stainless steel insulated cooler top with built-in drain pan
- Double pane glass front and back panels with stainless steel trim
- 1/2" tall perforated stainless steel bottom inserts

NOTE: Glass ice display units merchandise bottled beverages and may be factory mounted to the top of Glastender Back Bar, Narrow Door, Low Profile, Pass Thru, Front Venting, and Rear Feed Coolers, and Dry Storage Cabinets. Glass Ice Display Units ordered for field installation include a special insulated stainless drain pan that mounts to a countertop.

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Dimensional Information

12" Deep GDU
Mounted on
Cooler at Factory

1 1/2"








11 1/2"

12 1/4"

9"

1 1/2"

COOLER CABINET

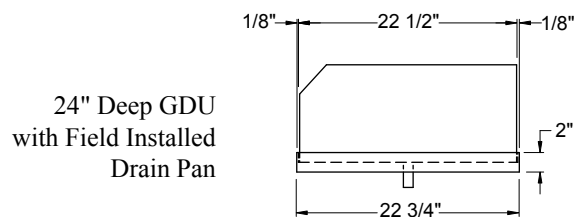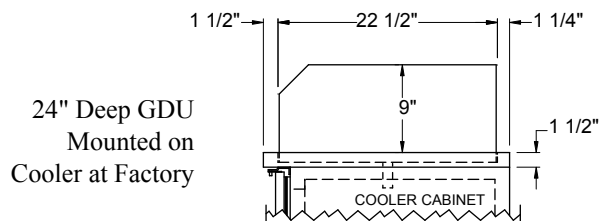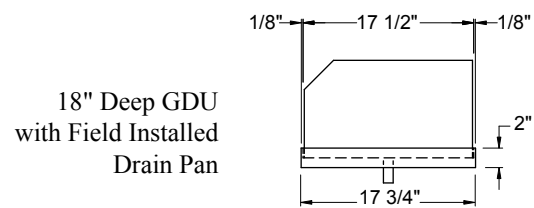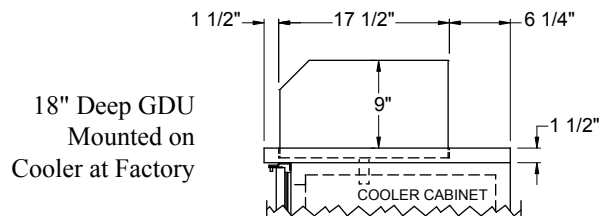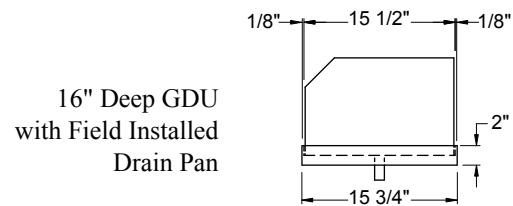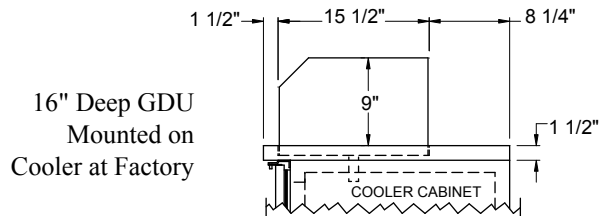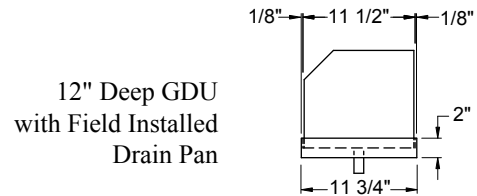

The front views below apply to GDU models that have a field installed drain pan. The stainless steel ends and glass front and rear panels for each Glass Display Unit can be broken down for cleaning. The stainless steel panels are insulated. Models larger than 54" wide have a 2" wide stainless steel center partition that breaks up the front and rear glass panels.

