

www.glastender.com



Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Extra-Deep Ice Bins

See reverse side for model number key

Standard Features

- Includes extra-deep liner for 38% more capacity than a standard liner
- All stainless steel construction
- · One-piece, seamless top and backsplash
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner, acts as thermal barrier to prevent heat transfer, and makes the cover slide easier.
- Tubing chase available centered in backsplash of 12" and larger models. Specify accessory model #TC-BS.
- Backsplash mounted, hot and cold water ice-melting faucet available. Specify accessory model # IMF.
- 24" deep version provides larger ice bin not just a deck extension on the back of the 19" deep model
- · Sliding stainless steel cover
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- · Adjustable stainless steel bullet feet
- · Models available with ten circuit cold plate



4004503 Conforms to ANSI/NSF STD 2

To view underbar installation instructions, please visit: https://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications

Drain

- Non-cold plate model: 1-1/2" tailpiece
- Ten circuit cold plate model '-CP10-': 3/4" MPT
- Tubing Chase in Backsplash (Optional)
- 2-3/8" by 4" hole centered in backsplash

Cover

- Two-piece sliding cover, 20 gauge stainless steel, included with all models
- Cold Plate (Models with '-CP10-' in model number)
- Ten circuit available with all 24" and wider models
- Connection is 5/16" O.D. stainless steel tubing with swaged end
- *Liner Depth* • 14-1/2"

- *Ice Capacity*
- "A" depth = 3.85 lbs X length
- "B" depth = 4.89 lbs X length

Legs

- 1-5/8" diameter 16 gauge stainless steel
- Stainless steel bullet feet

Materials

- 20 gauge stainless steel
- · PVC plastic breaker strip around opening of ice bin liner

 Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780
 Approval/Notes:


 989.752.4275 • 800.748.0423 • Fax 989.752.4444
 Approval/Notes:

 www.glastender.com
 Specifications subject to change without notice. For current specifications please visit our website.

 Printed in USA
 Rev. 02-11-21


Dimensional Information

"A" Depth-19" Deep Models

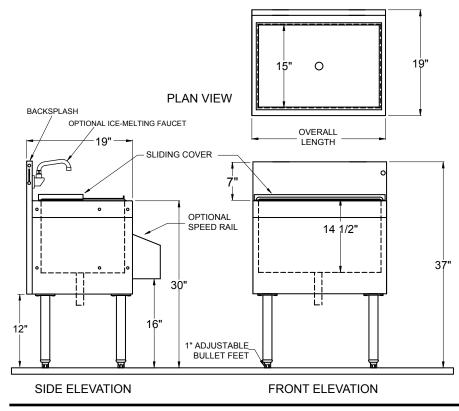

Models Without Cold Plate	Overall Length
IBA-18-ED	18″
IBA-24-ED	24″
IBA-30-ED	30″
IBA-36-ED	36″
IBA-42-ED	42″
IBA-48-ED	48″
Models With Cold Plate	Overall Length
IBA-24-CP10-ED	24″
IBA-30-CP10-ED	30″
IBA-36-CP10-ED	36″
IBA-42-CP10-ED	42″
IBA-48-CP10-ED	48″

"B" Depth-24" Deep Models

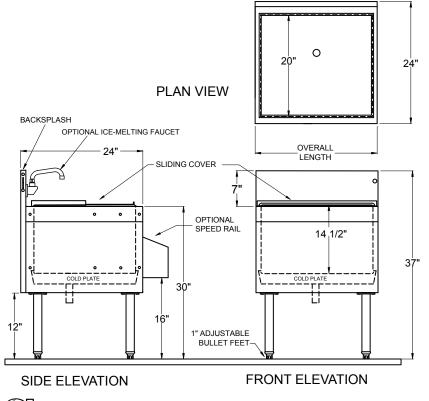

Models With Cold Plate	Overall Length
IBB-24-CP10-ED	24″
IBB-30-CP10-ED	30″
IBB-36-CP10-ED	36″
IBB-42-CP10-ED	42″
IBB-48-CP10-ED	48″



5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com