



Glo-Ray® Curved Infrared Strip Heaters

Models:

GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72
GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

This stylish patented design, based on our signature Glo-Ray® strip heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while warming the products below.


The entire holding surface is heated evenly with no “cold” spots thanks to Hatco's dependable infrared element technology.

Hatco's wide array of colors help provide the right look for your venue.

Standard features

- Narrow, curved design: 2"H by 6"D (51 x 150 mm) uses a very small footprint.
- Lengths available from 18"-72" (457- 1829 mm) in 6" (152 mm) increments
- Available in Standard and High Watt units
- Patented housing design
- End panels and angle mounting brackets match unit color
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Mounting Brackets, 3' (914 mm) Conduit and 5' (1524 mm) power leads are standard (included) – Non-adjustable Tubular Stands, which attach to countertop or ceiling, are optional
- Metal Sheathed Element part guaranteed against burnout and breakage for two years

Project _____
Item # _____
Quantity _____

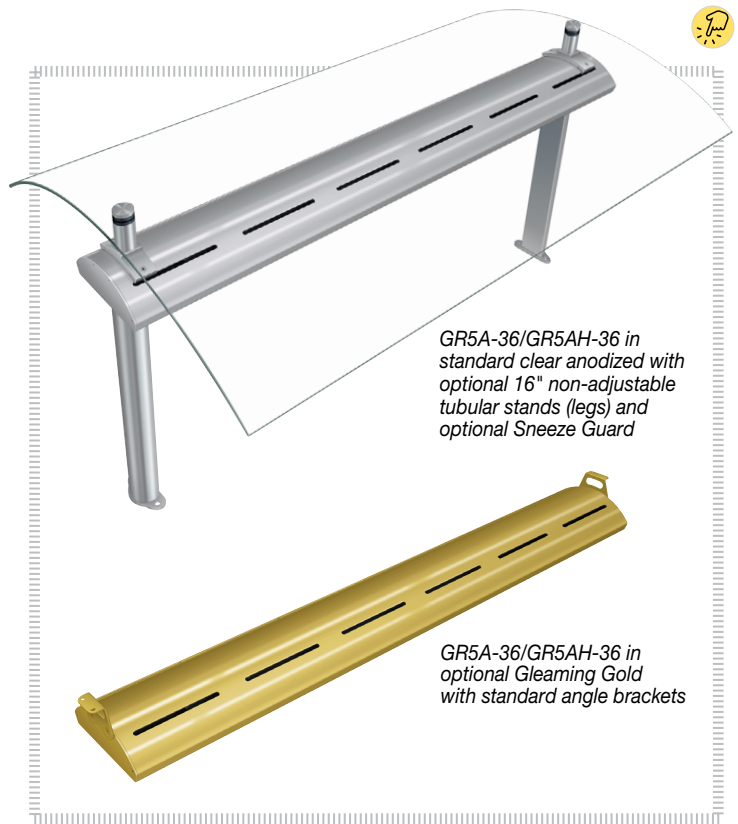

GR5A-36/GR5AH-36 in standard clear anodized with optional 16" non-adjustable tubular stands (legs) and optional Sneeze Guard

GR5A-36/GR5AH-36 in optional Gleaming Gold with standard angle brackets

Options (available at time of purchase only)

Housing color (clear Anodized standard) – End panels and Mounting Brackets match unit color

Designer Color†

- | | | | |
|------------------------------------|---------------------------------------|---|--|
| ☐ Warm Red | ☐ Black | ☐ Gray Granite | ☐ White Granite |
| ☐ Navy Blue | ☐ Hunter Green | ☐ Antique Copper | |

Gloss Finish†

- | | | | |
|---|--------------------------------------|-------------------------------------|--|
| ☐ Radiant Red | ☐ Glossy Gray | ☐ Bold Black | ☐ Gleaming Gold |
| ☐ Brilliant Blue | | | |

Curved tempered glass Sneeze Guard with penciled and polished edges
24"D x 4.125"H (610 x 105 mm)

- | | |
|--|--|
| ☐ Black Anodized Hardware | ☐ Clear Anodized Hardware |
|--|--|

Non-adjustable Tubular Stands (Angle Brackets Standard) – choose style, clearance and color below (clear Anodized Standard)

- | |
|---|
| ☐ Bottom Mount, attach to counter |
| ☐ Side mount leg for bottom mount |
| ☐ Side mount leg for top mount installation |
| ☐ 10' (254 mm) ☐ 12' (305 mm) ☐ 14' (356 mm) ☐ 16' (406 mm) |
| ☐ Designer Color or Gloss Finish† to match unit color for Non-adjustable Tubular Stands |

Power Wire Lead Length – 5' (1524 mm) is Standard, must specify total lead length required (standard LED lead length is 1.5' (457 mm) longer than the power lead length)

- | |
|---|
| ☐ 6' - 10' (1829 - 3048 mm) total power Lead Length |
| ☐ 11' - 15' (3353 - 4572 mm) total power Lead Length |

†Non-standard colors are non-returnable



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)




Glo-Ray® Curved Infrared Strip Heaters

Models: GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

GR5A, GR5AH

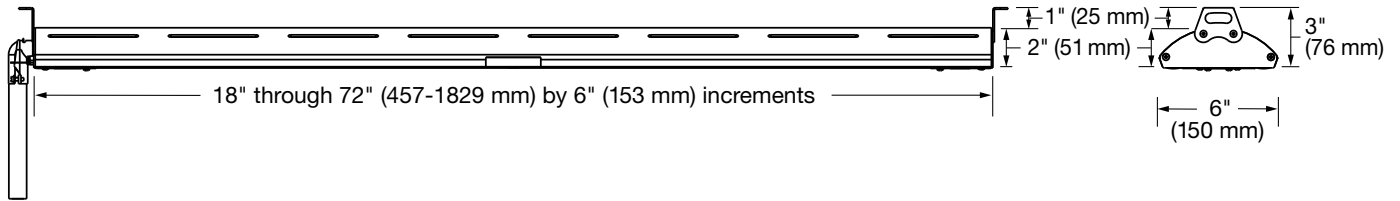

SPECIFICATIONS Glo-Ray® Curved Infrared Strip Heaters

The shaded areas contain electrical information for International models only

Standard Watt					High Watt					All Models
Model	Volts single phase	Watts	Amps	Weight*	Model	Volts single phase	Watts	Amps	Weight*	Dimensions W x D x H
GR5A-18	120	250	2.1	10 lbs. (5 kg.)	GR5AH-18	120	350	2.9	16 lbs. (8 kg.)	18" x 6" x 2" (457 x 150 x 51 mm)
	208		1.2			208		1.7		
	220		1.1			220		1.6		
	240		1.0			240		1.5		
	220-230 (CE) ^E	250-273	1.1-1.2			220-230 (CE) ^E	350-383	1.6-1.7		
	230-240 (CE) ^{EE}	230-250	1.0-1.0			230-240 (CE) ^{EE}	321-350	1.4-1.5		
GR5A-24	120	350	2.9	14 lbs. (7 kg.)	GR5AH-24	120	500	4.2	17 lbs. (8 kg.)	24" x 6" x 2" (610 x 150 x 51 mm)
	208		1.7			208		2.4		
	220		1.6			220		2.3		
	240		1.4			240		2.1		
	220-230 (CE) ^E	350-383	1.6-1.7			220-230 (CE) ^E	500-546	2.3-2.4		
	230-240 (CE) ^{EE}	321-350	1.4-1.5			230-240 (CE) ^{EE}	459-500	2.0-2.1		
GR5A-30	120	450	3.8	14 lbs. (7 kg.)	GR5AH-30	120	660	5.5	16 lbs. (8 kg.)	30" x 6" x 2" (762 x 150 x 51 mm)
	208		2.2			208		3.2		
	220		2.0			220		3.0		
	240		1.9			240		2.8		
	220-230 (CE) ^E	450-492	2.0-2.1			220-230 (CE) ^E	650-710	3.0-3.1		
	230-240 (CE) ^{EE}	413-450	1.8-1.9			230-240 (CE) ^{EE}	597-650	2.6-2.7		
GR5A-36	120	575	4.8	12 lbs. (6 kg.)	GR5AH-36	120	800	6.7	13 lbs. (6 kg.)	36" x 6" x 2" (919 x 150 x 51 mm)
	208		2.8			208		3.8		
	220		2.6			220		3.6		
	240		2.4			240		3.3		
	220-230 (CE) ^E	575-628	2.6-2.7			220-230 (CE) ^E	800-874	3.6-3.8		
	230-240 (CE) ^{EE}	528-575	2.3-2.4			230-240 (CE) ^{EE}	735-800	3.2-3.3		
GR5A-42	120	675	5.6	13 lbs. (6 kg.)	GR5AH-42	120	950	7.9	16 lbs. (8 kg.)	42" x 6" x 2" (1067 x 150 x 51 mm)
	208		3.2			208		4.6		
	220		3.1			220		4.3		
	240		2.8			240		4.0		
	220-230 (CE) ^E	675-738	3.1-3.2			220-230 (CE) ^E	950-1038	4.3-4.5		
	230-240 (CE) ^{EE}	620-675	2.7-2.8			230-240 (CE) ^{EE}	872-950	3.8-4.0		
GR5A-48	120	800	6.7	18 lbs. (9 kg.)	GR5AH-48	120	1100	9.2	15 lbs. (7 kg.)	48" x 6" x 2" (1219 x 150 x 51 mm)
	208		3.8			208		5.3		
	220		3.6			220		5.0		
	240		3.3			240		4.6		
	220-230 (CE) ^E	800-874	3.6-3.8			220-230 (CE) ^E	1100-1202	5.0-5.2		
	230-240 (CE) ^{EE}	735-800	3.2-3.3			230-240 (CE) ^{EE}	1010-1100	4.4-4.6		
GR5A-54	120	925	7.7	17 lbs. (8 kg.)	GR5AH-54	120	1250	10.4	20 lbs. (10 kg.)	54" x 6" x 2" (1372 x 150 x 51 mm)
	208		4.4			208		6.0		
	220		4.2			220		5.7		
	240		3.9			240		5.2		
	220-230 (CE) ^E	925-1011	4.2-4.4			220-230 (CE) ^E	1250-1366	5.7-5.9		
	230-240 (CE) ^{EE}	850-925	3.7-3.9			230-240 (CE) ^{EE}	1148-1250	5.0-5.2		
GR5A-60	120	1050	8.8	22 lbs. (10 kg.)	GR5AH-60	120	1400	11.7	20 lbs. (10 kg.)	60" x 6" x 2" (1524 x 150 x 51 mm)
	208		5.0			208		6.7		
	220		4.8			220		6.4		
	240		4.4			240		5.8		
	220-230 (CE) ^E	1050-1148	4.8-5.0			220-230 (CE) ^E	1400-1530	6.4-6.7		
	230-240 (CE) ^{EE}	964-1050	4.2-4.4			230-240 (CE) ^{EE}	1286-1400	5.6-5.8		

* Weights are approximate and do not include shipping materials.

^E Uses 220V element. ^{EE} Uses 240V element. ⁹Infinite switch not available

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)



Glo-Ray® Curved Infrared Strip Heaters

Models: GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

SPECIFICATIONS Glo-Ray® Curved Infrared Strip Heaters

The shaded areas contain
electrical information for
International models only

Standard Watt					High Watt					All Models
Model	Volts single phase	Watts	Amps	Weight*	Model	Volts single phase	Watts	Amps	Weight*	Dimensions W x D x H
GR5A-66	120	1160	9.7	32 lbs. (15 kg.)	GR5AH-66	120	1560	13.0 ^o	25 lbs. (12 kg.)	66" x 6" x 2" (1675 x 150 x 51 mm)
	208		5.6			208		7.5		
	220		5.3			220		7.1		
	240		4.8			240		6.2		
	220-230 (CE) [£]	1160-1268	5.3-5.5			220-230 (CE) [£]	1560-1705	7.1-7.4		
	230-240 (CE) ^{££}	1065-1160	4.6-4.8			230-240 (CE) ^{££}	1433-1560	6.2-6.5		
GR5A-72	120	1275	10.6	33 lbs. (15 kg.)	GR5AH-72	120	1725	14.4 ^o	25 lbs. (12 kg.)	72" x 6" x 2" (1829 x 150 x 51 mm)
	208		6.1			208		8.3		
	220		5.5			220		7.8		
	240		5.3			240		7.2		
	220-230 (CE) [£]	1275-1394	5.8-6.1			220-230 (CE) [£]	1725-1885	7.8-8.2		
	230-240 (CE) ^{££}	1171-1275	5.1-5.3			230-240 (CE) ^{££}	1584-1725	6.9-7.2		

* Weights are approximate and do not include shipping materials.

£ Uses 220V element. ££ Uses 240V element. ^oInfinite switch not available

RECOMMENDED MOUNTING HEIGHTS



(Refer to the Installation section in the Installation and Operating Manual on the [Hatco website](#))

Make sure countertop material is designed to withstand long periods of hot food holding temperatures. Contact manufacturer of countertop material for application information.

GR5A Series strip heaters can be installed over a steam table. Follow the minimum clearance requirements for non-combustible surroundings.

Combustible surroundings (GR5A only)

Below lowest portion of overshelf: 1" (25 mm) clearance
Unit to surface below: 11" (279 mm)
Back to wall: 1" (25 mm)

Non-Combustible surroundings (GR5A, GR5AH)

Below lowest portion of overshelf: 1" (25 mm) clearance
Unit to surface below: 10" (254 mm)
Back to wall: 0" (0 mm)

REMOTE CONTROL ENCLOSURES

RMB series uses one Control Box per Strip Heater - If RMB2 series is used, multiple warmers can be controlled from one box (U.S., Canada only). For more details, see below or consult Price List.



[Click here to download the RMB Choose Remote Box Excel Spreadsheet](#)
or follow this file path: [www.hatcocorp.com](#) > Resources > Choose Remote Box

Model	Width (W x D x H)
RMB-3A	5.5" x 3" x 2.5" (140 x 76 x 64 mm)
RMB-3B	
RMB-3C	
RMB-3D	
RMB-3F	
RMB-3G	
RMB-3H	
RMB-7F	9" x 3" x 2.5" (229 x 76 x 64 mm)
RMB-7G	
RMB-7H	
RMB2-1R	11" x 4.5" x 5.5" (280 x 115 x 140 mm)
RMB2-2R	14" x 4.5" x 5.5" (356 x 115 x 140 mm)

PRODUCT SPECS

Glo-Ray® Slim Curved Strip Heaters

The Curved Infrared Strip Heater shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of Clear Anodized, Designer or Gloss Finish painted patented housing and include as standard equipment 3' (914 mm) conduit with 5' (1524 mm) power leads and mounting brackets. The infrared heating element

shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include choice of Designer color or Gloss Finish in anti-microbial paint, extended power leads and Non-adjustable Tubular Stands in Bottom Mount or Side mount leg (in bottom mount or top mount installation) and curved tempered glass Sneeze Guards.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](#) | [support@hatcocorp.com](#) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)