

# **Heated Base Glass Shelves**

Models: HBG-2418, -3018, -3618, -4818, -6018, -7218

Hatco Heated Base Glass Shelves have a heated ceramic glass top that creates uniform heat across the entire surface, and are made of approved foodsafe material. Ideal for use on pass-through areas, buffet lines, and as hors d'oeuvre displays.

## Standard features

- Made of approved foodsafe material allowing placement of food product directly on the glass surface
- Thermostatically-controlled ceramic glass surface heated base
- Lighted On/Off rocker switch
- All units are equipped with an attractive trim mounting ring available in stainless steel (standard) Designer Black or White
- Portable models come with a 1829 mm (6') cord and plug
- Portable models offer an optional angled food stop which keeps product on the heat zone
- Portable models' surface temperature ranges from 100° to 195°F (38° to 90° C)

| Project _ |  |  |  |
|-----------|--|--|--|
| Item #    |  |  |  |
| 0         |  |  |  |



**Options** (available at time of purchase only)

Ceramic Glass Color - Black Standard - Non-standard colors are non-returnable

□White

Angled Food Stop

□ Designer Black □ White


□24" (610 mm) □30" (672 mm) □36" (914 mm) □ 48" (1219 mm) □ 60" (1524 mm) □72" (1829 mm)

Trim Ring color - Stainless Steel Standard - Non-standard colors are

non-returnable □ Designer Black □ White

Frame (base) color - Designer Black Standard - Non-standard colors are non-returnable

□White





For operation, location and safety information, please refer to the Installation and Operating Manual.












# **Heated Base Glass Shelves**

Models: HBG-2418, -3018, -3618, -4818, -6018, -7218

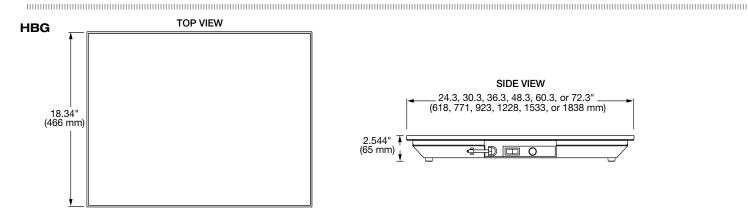

# SIDE VIEW 24.3, 30.3, 36.3, 48.3, 60.3, or 72.3" (618, 771, 923, 1228, 1533, or 1838 mm) 2.544

#### **SPECIFICATIONS Heated Base Glass Shelves**

The shaded areas contain electrical information for International models

| Model                   | <b>Dimensions</b> (Width x Depth x Height▲)    | Voltage          | Watts     | Amps    | Plug               | Ship Weight*       |
|-------------------------|--|------------------|-----------|---------|--------------------|--------------------|
| HBG-2418                | 24.3" x 18.3" x 2.544"<br>(618 x 466 x 65 mm)  | 100              | 425       | 4.3     | NEMA 5-15P         | 29 lbs.<br>(14 kg) |
|                         |  | 120              | 425       | 3.5     | NEMA 5-15P         |                    |
|                         |  | 220z             | 420       | 1.9     | BS-1363            |                    |
|                         |  | 220-230 (CE)     | 420-459   | 1.9-2.0 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 459-500   | 2.0-2.1 | BS-1363 or AS 3112 |                    |
| HBG-3018                | 30.3" x 18.3" x 2.544"<br>(771 x 466 x 65 mm)  | 100              | 525       | 5.3     | NEMA 5-15P         | 33 lbs.<br>(15 kg) |
|                         |  | 120              | 525       | 4.4     | NEMA 5-15P         |                    |
|                         |  | 220 <b>z</b>     | 525       | 2.4     | BS-1363            |                    |
|                         |  | 220-230 (CE)     | 525-574   | 2.4-2.5 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 574-625   | 2.5-2.6 | BS-1363 or AS 3112 |                    |
| HBG-3618 <b>•</b>       | 36.3" x 18.3" x 6.15"<br>(923 x 466 x 156 mm)  | 100              | 630       | 6.3     | NEMA 5-15P         | 36 lbs.<br>(17 kg) |
|                         |  | 120              | 630       | 5.3     | NEMA 5-15P         |                    |
|                         |  | 220z             | 630       | 2.9     | BS-1363            |                    |
|                         |  | 220-230 (CE)     | 630-689   | 2.9-3.0 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 689-750   | 3.0-3.1 | BS-1363 or AS 3112 |                    |
| HBG-4818 <sup>•</sup> ≈ | 48.3" x 18.3" x 6.15"<br>(1228 x 466 x 156 mm) | 100              | 850       | 8.5     | NEMA 5-15P         | 42 lbs.<br>(19 kg) |
|                         |  | 120              | 850       | 7.1     | NEMA 5-15P         |                    |
|                         |  | 220 <sup>z</sup> | 840       | 3.8     | BS-1363            |                    |
|                         |  | 220-230 (CE)     | 840-918   | 3.8-4.0 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 918-1000  | 4.0-4.2 | BS-1363 or AS 3112 |                    |
| HBG-6018 <sup>•</sup> ≈ | 60.3" x 18.3" x 6.15"<br>(1533 x 466 x 156 mm) | 100              | 1050      | 10.5    | NEMA 5-15P         | 60 lbs.<br>(28 kg) |
|                         |  | 120              | 1050      | 8.8     | NEMA 5-15P         |                    |
|                         |  | 220z             | 1050      | 4.8     | BS-1363            |                    |
|                         |  | 220-230 (CE)     |           | 4.8-5.0 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 1148-1250 | 5.0-5.2 | BS-1363 or AS 3112 |                    |
| HBG-7218• ≈             | 72.3" x 18.3" x 6.15"<br>(1838 x 466 x 156 mm) | 100              | 1260      | 12.6    | NEMA 5-15P         | 68 lbs.<br>(31 kg) |
|                         |  | 120              | 1260      | 10.5    | NEMA 5-15P         |                    |
|                         |  | 220 <sup>z</sup> | 1260      | 5.7     | BS-1363            |                    |
|                         |  | 220-230 (CE)     | 1260-1378 | 5.7-6.0 | CEE 7/7 Schuko     |                    |
|                         |  | 230-240 (CE)     | 1378-1500 | 6.0-6.3 | BS-1363 or AS 3112 |                    |

- For Angled Food Stop option, add 0.5" (13 mm) to the Width, Depth and Height dimensions.
- Shipping weight includes packaging.
- AS3112 plug is for use in Australia only.

- Height includes standard 4" legs.
- Units 48" (1219 mm) and larger are constructed of two equal size pieces of glass which create a seam.
- 60 Hz

#### **CORD LOCATION**


#### **PLUG CONFIGURATIONS**

Center of side with switch.

Please refer to electrical specifications shown in charts.









### **PRODUCT SPECS Heated Base Glass Shelves**

The Heated Base Glass Shelf shall be a Hatco model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Heated Base Glass Shelf shall be rated at ... watts, volts, and ... inches (millimeters) in overall width. It shall consist of a food-safe material, thermostatically-

controlled heated base, and a 6' (1829 mm) cord with plug attached. Options shall include White Ceramic Glass and following options (available in Designer Black or White): Angled Food Stop, Trim Ring and Frame. All Designer colors are anti-microbial Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | support@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library | Patents | Chat