

## 40E Series - Endless Design Single Duty - Red Meat



| Model No.               | Description    | Length | Depth | Height | Voltage | Amps | HP/BTUs | Power Cord | Est. Ship Weight |
|-------------------------|----------------|--------|-------|--------|---------|------|---------|------------|------------------|
| <b>SC-CMS40E-4-LED</b>  | Self Contained | 52.5"  | 40"   | 53"    | 115     | 12.0 | 1/4     | YES        | 530              |
| <b>SC-CMS40E-6-LED</b>  | Self Contained | 76.5"  | 40"   | 53"    | 115     | 12.0 | 1/3     | YES        | 741              |
| <b>SC-CMS40E-8-LED</b>  | Self Contained | 100.5" | 40"   | 53"    | 115     | 16.0 | 1/2     | YES        | 983              |
| <b>SC-CMS40E-10-LED</b> | Self Contained | 124.5" | 40"   | 53"    | 115     | 13.8 | 1/2     | NO         | 1150             |
| <b>SC-CMS40E-12-LED</b> | Self Contained | 148.5" | 40"   | 53"    | 115     | 17.4 | 3/4     | NO         | 1396             |
| <b>R-CMS40E-4-LED</b>   | Remote         | 52.5"  | 40"   | 53"    | 115     | 0.8  | 1400    | NO         | 497              |
| <b>R-CMS40E-6-LED</b>   | Remote         | 76.5"  | 40"   | 53"    | 115     | 1.3  | 2100    | NO         | 693              |
| <b>R-CMS40E-8-LED</b>   | Remote         | 100.5" | 40"   | 53"    | 115     | 1.6  | 2800    | NO         | 890              |
| <b>R-CMS40E-10-LED</b>  | Remote         | 124.5" | 40"   | 53"    | 115     | 2.4  | 3500    | NO         | 1089             |
| <b>R-CMS40E-12-LED</b>  | Remote         | 148.5" | 40"   | 53"    | 115     | 2.4  | 4200    | NO         | 1325             |

MODEL NUMBER PREFIX - SC = Self Contained R = Remote  
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting  
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity  
 • Cases are equipped with drains; check your local building codes for connection requirements.  
 • Specification subject to change without notice  
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



## 40E Series - Endless Design Single Duty - Red Meat

### Standard Specifications and Optional Features

#### CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Thermal insulated front glass - 28" H
- Heavy gauge steel super structure
- Single duty display
- Endless design allows for continuous line up
- Drain is included for cleaning

#### INTERIOR

- White, black, and stainless steel ends
- Air insulated baffle (prevents moisture from dripping into display area)

#### EXTERIOR

- Double pane rear removable doors
- Newly designed rear compression door jamb
- Removable front grille allows for cleaning
- Removable rear grille for easy servicing
- 2 - 1/4" removable end panels
- 1" Front bumper

#### FINISHES

- White, black, and stainless steel front and ends
- Stainless steel mirror trim
- Stainless steel heavy gauge top - 20" W
- Rear of unit is stainless steel brush finish at top
- Bottom rear is designer white or glossy black

#### LIGHTING

- 2 rows of LED lighting at top of unit

#### ELECTRICAL REQUIREMENTS

- 115V, 4', 6', AND 8' with power cord
- Unit must be hard wired, 10' and 12' ONLY
- UL/CUL listed
- 115V-12AMP general purpose receptacle (wired separately) 10' and 12' ONLY

#### REFRIGERATION

- Copevap system (eliminates need for condensate pan)
- R513A expansion valve system (SC)
- R448A expansion valve system (R)
- Humidity coil located at inside top of unit
- Self contained unit
- Automatic defrost electronically controlled (self contained units only)
- Electronically maintains constant temperatures
- Remotes available

#### OPTIONS

- Scale stand
- Paper cutter
- Stainless steel, laminate, or paint
- Mirrored doors
- Extra stainless steel mezzanine shelf
- Drop work shelf
- 1" Special color front bumper
- Door locks
- Digital thermometer
- Meat platters
- Red meat bulbs

#### Important Note:

All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity. Product must be cooled before being displayed within the case.

**DRAIN IS REQUIRED**

## 40E Series - Endless Design Single Duty - Red Meat

### Technical Data

| Model No.                                   | SC<br>R     | SC-CMS40E-4-LED<br>R-CMS40E-4-LED | SC-CMS40E-6-LED<br>R-CMS40E-6-LED | SC-CMS40E-8-LED<br>R-CMS40E-8-LED | SC-CMS40E-10-LED<br>R-CMS40E-10-LED | SC-CMS40E-12-LED<br>R-CMS40E-12-LED |
|---------------------------------------------|-------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------------------|-------------------------------------|
| Length with (2) ends                        |             | 52.5"                             | 76.5"                             | 100.5"                            | 124.5"                              | 148.5"                              |
| Length without ends                         |             | 48"                               | 72"                               | 96"                               | 120"                                | 144"                                |
| Height with ends                            |             | 53"                               | 53"                               | 53"                               | 53"                                 | 53"                                 |
| Height without ends                         |             | 52.5"                             | 52.5"                             | 52.5"                             | 52.5"                               | 52.5"                               |
| Depth with ends                             |             | 40"                               | 40"                               | 40"                               | 40"                                 | 40"                                 |
| Depth without ends                          |             | 39.5"                             | 39.5"                             | 39.5"                             | 39.5"                               | 39.5"                               |
| Endless design<br>(Dimensions are +/- 1/4") |             | YES                               | YES                               | YES                               | YES                                 | YES                                 |
| Operating temperature                       |             | 34°F to 36°F                      | 34°F to 36°F                      | 34°F to 36°F                      | 34°F to 36°F                        | 34°F to 36°F                        |
| Refrigerant (exp. valve)                    | SC          | R513A                             | R513A                             | R513A                             | R513A                               | R513A                               |
| Refrigerant (exp. valve)                    | R           | R448A                             | R448A                             | R448A                             | R448A                               | R448A                               |
| Compressor size HP                          | SC          | 1/4                               | 1/3                               | 1/2                               | 1/2                                 | 3/4                                 |
| Defrost per day (24 hours)                  | Air Defrost | 1 per day                         | 1 per day                         | 1 per day                         | 1 per day                           | 1 per day                           |
| BTU's at +20°F Evap. Temp.                  | R           | 1400                              | 2100                              | 2800                              | 3500                                | 4200                                |
| Voltage                                     | SC          | 115                               | 115                               | 115                               | 115                                 | 115                                 |
| Amperage                                    | SC          | 12.0                              | 12.0                              | 16.0                              | 13.8                                | 17.4                                |
| Remote Voltage                              | R           | 115                               | 115                               | 115                               | 115                                 | 115                                 |
| Amperage, lights only                       | R           | 0.8                               | 1.3                               | 1.6                               | 2.4                                 | 2.4                                 |
| Cord and plug                               | SC<br>R     | YES<br>NO                         | YES<br>NO                         | YES<br>NO                         | NO<br>NO                            | NO<br>NO                            |
| Exterior color                              |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                             | W, B, S                             |
| Interior color                              |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                             | W, B, S                             |
| Inside end panels                           |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                             | W, B, S                             |
| Floors                                      |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                             | W, B, S                             |
| # of top doors                              |             | 2                                 | 2                                 | 4                                 | 4                                   | 4                                   |
| Door size                                   |             | 20.8" x 23.5"                     | 31.3" x 23.5"                     | 20.8" x 23.5"                     | 26.0" x 23.5"                       | 31.3" x 23.5"                       |
| # of coils                                  |             | 2                                 | 2                                 | 2                                 | 2                                   | 2                                   |
| Bottom storage                              |             | No                                | No                                | No                                | No                                  | No                                  |
| Front glass                                 |             | 28" x 46.6875"                    | 28" x 70.6875"                    | 28" x 94.6875"                    | 28" x 118.6875"                     | 28" x 142.6875"                     |
| # of main deck shelves                      |             | 2                                 | 3                                 | 4                                 | 5                                   | 6                                   |
| Main deck size                              |             | 23.5" x 32.62"                    | 23.5" x 32.62"                    | 23.5" x 32.62"                    | 23.5" x 32.62"                      | 23.5" x 32.62"                      |
| Cubic capacity                              |             | 24                                | 36                                | 49                                | 62                                  | 74                                  |
| Mezzanine shelf (Optional)                  |             | 47.00" x 12.00"                   | 71.00" x 12.00"                   | (2) 47.00" x 12.00"               | (2) 59.00" x 12.00"                 | (2) 71.00" x 12.00"                 |
| Shipping Info                               |             |                                   |                                   |                                   |                                     |                                     |
| Height                                      |             | 63"                               | 63"                               | 63"                               | 63"                                 | 63"                                 |
| Depth                                       |             | 47"                               | 47"                               | 47"                               | 47"                                 | 47"                                 |
| Length                                      |             | 61"                               | 87"                               | 109"                              | 135"                                | 157"                                |
| Gross weight SC/R                           |             | 530/497                           | 741/693                           | 983/890                           | 1150/1089                           | 1396/1325                           |
| Cubic feet                                  |             | 89                                | 128                               | 164                               | 199                                 | 231                                 |

**(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)**

#### Prefix

SC = Self Contained  
R = Remote

#### Suffix


B = Black  
W = White  
S = Stainless Steel  
LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

## 40E Series - Endless Design Single Duty - Red Meat

### Technical Data • Side View • Plan View

Side View

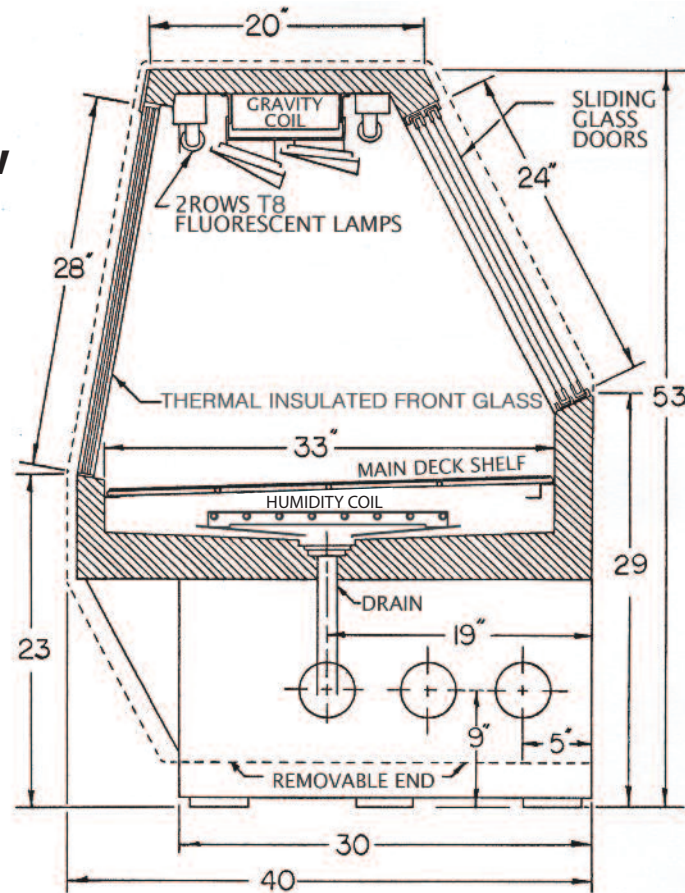

Plan View

