

**MODEL: IDC-VBC90AASCP**
**DELI DISPLAY CASES – Straight Glass.**


IDC-VBC90AASCP

### General Strengths

- ✓ **Modular Line.** Closed and open angles to adapt the elements to a determinate space.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.

MODEL	Dimensions (inches) (mm)			Sides	Nº Shelves	Ref.	Refrig. Amount (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IDC-VBC90AASCP	72-7/8 1850	68-5/16 1735	50-3/4 1290	1-3/16+1-3/16	1+1 (opc)	R404A	1.21 550	33°F / 41°F 0°C / +5°C	6 170	5/8	10.6	490 222

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

**MODEL: IDC-VBC90AASCP**
**DELI DISPLAY CASES – Straight Glass.**
**STANDARD FEATURES**
**Exterior**

- Laminated steel plate,
- AISI 304 Stainless Steel worktop,
- Lift-up straight tempered security glass system,
- Enamelled steel base,
- DM lacqued decoration with LED lighting,

**Interior**

- AISI 304 18/10 exhibition area,
- Upper profile LED lighting,
- LED lighting shelf,

**OPTIONAL FEATURES**

- ✓ Rear sliding doors,
- ✓ Night curtains,
- ✓ Optional decoration: Red RAL 3001, Blue RAL 5015, Orange RAL 2003, Yellow RAL 1018, Sky blue RAL DESIGN 2108025, Green dark RAL 6002, Pistachio RAL DESIGN 1107060, Maroon RAL 3003, Pink RAL DESIGN 3504035, Beige RAL 1001, Violet RAL 4007 and White RAL 9016.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

**Insulation**

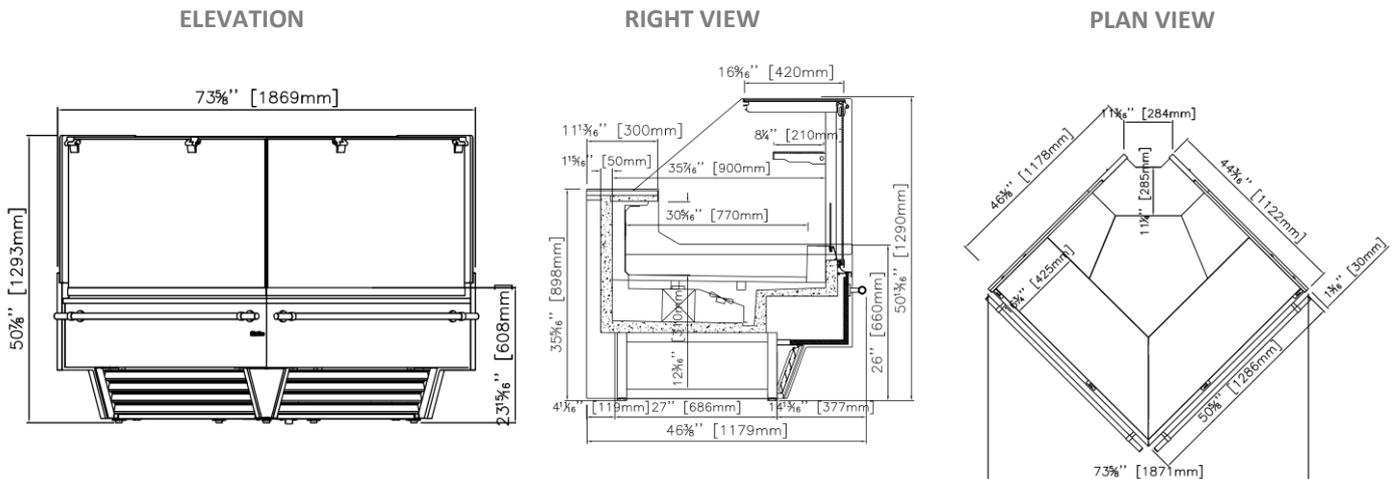
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

**Refrigeration**

- Control of the final defrost temperature,
- Stainless Steel Evaporative double trays, first, by hot gas, second by electrical resistance.
- Forced air refrigeration system,
- Refrigerant gas R404A,
- Case engineered to operate at 75°F (25°C) and 55% relative humidity
- Refrigeration capacity: 4487 Btu/h(-14°F) / 1315 W(-10°C).

**Electrical**

- Cord and NEMA 5-20P plug,
- Electrical connection is 115V / 1ph / 60 Hz.


**ETL Listed to UL471 Standard and Sanitation classified to NSF7.**
**PLAN VIEW**


ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE