



Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: **IMD-ERV36IIGD**

Back bar coolers – Stainless Steel – Glass Door

General Strengths

- ✓ **Energy efficiency higher.** R290 refrigerant with electric fans, LED lighting and evaporative tray without electric resistances.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).
- ✓ **Lighting.** Interior cooler includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.



DOE COMPLIANT



MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Capacity 12 oz Cans	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H										
IMD-ERV36IIGD	36-1/4 922	23-3/4 604	34-1/2 877	1	2	39 6-pks	R290	0.24 110	33°F/38°F 0°C/+4°C	5.72 162	1/5	3.8	290 132

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

Follow us:

Revision: 01 Date: 07/02/2018 IMD-ERV36IIGD_FT_69_1

MODEL: IMD-ERV36IIGD
Back bar coolers – Stainless Steel – Glass Door

STANDARD FEATURES

➤ Exterior

- AISI 430 Stainless Steel,
- Levelling feet.

➤ Interior

- AISI 430 Stainless Steel,
- Sealed interior floors,
- **LED lighting.**

➤ Doors

- Thermopane double glass,
- Self closing doors with stay open feature,
- Stainless Steel heavy-duty hinges,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Doors locks,
- Door opening: 19-5/8" x 26-7/8" (500x682 mm).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
- Low GWP & Zero ODP Effect.

➤ Shelving

- (2) Plastic coated wire shelves per section,
- Set of Stainless-Steel shelf brackets,
- Easy remove for cleaning.

➤ Refrigeration

- Digital temperature controller with automatic defrost system,
- Energy-saving non-electric condensate pan,
- Forced air refrigeration system,
- Front-breathing refrigeration system.
- Electric fans,
- Copper tube with aluminium fins evaporator coil coated with anti-corrosion material 100% Polyester,
- Compact refrigeration system Monoblock,
- Refrigeration capacity: 867 Btu/h (14°F) / 254 W (-10°C).

➤ Electrical

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,




➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.

OPTIONAL FEATURES

- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

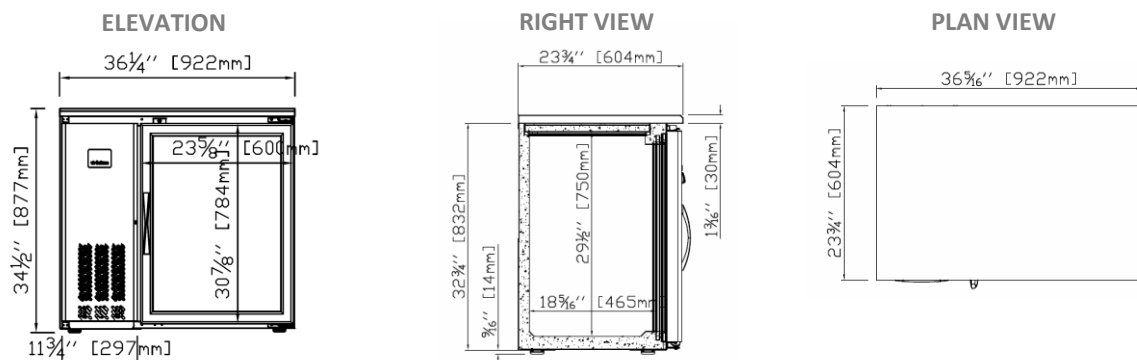

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE