



IQ F 1200

MODULAR FLAKE ICE MACHINE

220 V / 60 Hz

FEATURES

- ▶ PRODUCES FLAKE ICE
- ▶ HIGH EVAPORATOR EFFICIENCY: LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
- ▶ FRONT LED DISPLAY FOR QUICK DIAGNOSTICS
- ▶ I-CHECK SMART SYSTEM CONTROLS AND DETECTS PARAMETERS AND FAULTS
- ▶ ELECTRONIC CONTROL. ON/OFF LIGHTED SWITCH IN FRONT PANEL
- ▶ STAINLESS STEEL AUGER TO MAXIMIZE LIFESPAN
- ▶ POWERFUL GEAR MOTOR
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ OPTICAL PINPOINT CONTROL SYSTEM TO SET ICE STOCK LEVEL
- ▶ EASY ACCESS FOR SERVICE AND INSTALLATION

! THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE RECOMMENDED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)



	 24 H	 70°F/21°C 50°F/10°C	 90°F/32°C 70°F/21°C			
		lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	
IQ F 1200 A		1250 (567)	930 (422)	Width 22.01"(559) Depth 24.49"(622) Height 28.04"(712)	Width 25.04"(636) Depth 27.37"(695) Height 32.88"(835)	FLAKE ICE 85% ICE HARDNESS FACTOR
IQ F 1200 W		-	-			

ACCESSORIES

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

RECOMMENDED BINS



S400-22 + IQ F 1200

S500 + IQ F 1200

S750 + IQ F 1200

S900 + IQ F 1200

S1050 + IQ F 1200

SCS350 + IQ F 1200

SCS700 + IQ F 1200


SCD900 + IQ F 1200

SCD1400 + IQ F 1200

SCD1800 + IQ F 1200

TECHNICAL SCHEME

IQ F 1200

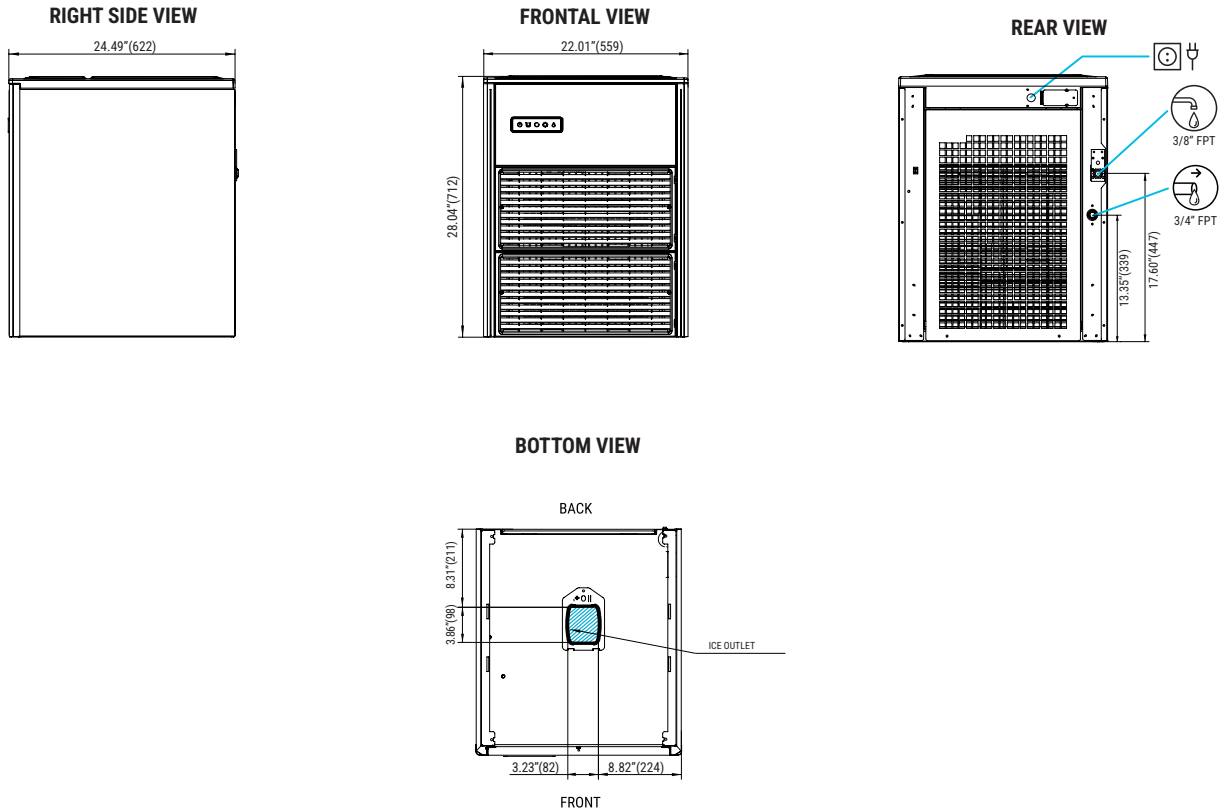

OPERATING CONDITIONS

* All dimensions in inches (and mm)

PRODUCTION (LBS) 60Hz

	±10% V	50°F/109°F	41°F/100°F	14.5 psi (1 bar) / 87 psi (6 bar)	R404	V	Hz	ph	24 H	IQ F 1200 AIR COOLED					24 H	IQ F 1200 WATER COOLED				
										°F	50°	60°	70°	86°		°F	50°	60°	70°	86°
										°C	10°	15°	21°	30°		°C	10°	15°	21°	30°
										50°	1290	1259	1208	1111		50°	-	-	-	-
										10°						10°	-	-	-	-
										68°	1250	1186	1078	981		68°	-	-	-	-
										21°						21°	-	-	-	-
										90°	1087	992	930	842		90°	-	-	-	-
										32°						32°	-	-	-	-
										109°	930	827	688	628		109°	-	-	-	-
										43°						43°	-	-	-	-

MODELS	 Temp. Ev. (°F)	 ASHRAE CONDITIONS CONDICIONES ASHRAE (BTu/h)	 (W)	 (W) 109°F	 (AWG/mm²) (n.)	 FUZE	 100lbs 90°F / 70°F (Kwh/100 lbs)	 gal 100lbs (l/h)	 HEAT REJECTED (BTu/h)	 (lbs)	 (lbs)
IQ F 1200 A 	5°	10,315	3,023	1,830	16/1.5 3	20	4.36	4.99 18.9	13,502 3,997	234	250
IQ F 1200 W 	-	-	-	-	- - -	-	-	- - -	- - -	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST

WARRANTY:
ICE MAKERS - 3 YEARS PARTS AND LABOR
EVAPORATOR - 5 YEARS PARTS AND LABOR
COMPRESSOR - 5 YEARS PARTS



AXIAL SYSTEM