Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IUC-UC48F

UNDERCOUNTER:
Undercounter Freezers

General Strengths

- ***Energy efficiency higher.*** *R290 refrigerant with electric fans and evaporative tray without electric resistances.*
- ***Sanitation.*** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ***Doors.*** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ***Control systems.*** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ***100% Tested.*** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ***Certified.*** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

DOE COMPLIANT

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (ºF) (ºC)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IUC-UC48F	48-1/8 1227	30-1/8 765	35-3/4 910	2	4	R290	0.24 110	33ºF/38ºF 0ºC/4ºC	14 396	1/2	4.5	360 163

Revision: 01 Date: 04/29/2019 IUC-UC48F_FT_69_1

Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____

Follow us:

Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IUC-UC48F

UNDERCOUNTER:
Undercounter Freezers

STANDARD FEATURES

- **Exterior**
  - AISI 430 Stainless Steel,
  - AISI 304 Stainless Steel Top.
- **Interior**
  - AISI 430 Stainless Steel.
- **Doors**
  - Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Stainless Steel heavy-duty hinges,
  - Triple chamber snap in door gaskets for easy removal and cleaning,
  - **Heated door frames to avoid accumulation of ice,**
  - Full-height door opening: 19-5/8”x21-7/8” (500x555 mm).
- **Insulation**
  - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
  - Low GWP & Zero ODP effect.

OPTIONAL FEATURES

- ✓ Single Overshelf kit.
- ✓ Double Overshelf kit,
- ✓ 4” Backsplash,
- ✓ Set of 2” diameter casters, with lock provided on front set,
- ✓ Electrical connection is 230 V / 1ph / 50 Hz (plug type varies).

- **Shelving**
  - (2) Plastic coated wire shelves per section,
  - Set of Stainless Steel shelf brackets,
  - Easy remove for cleaning,
  - Dimensions WxD: 21”x17” (533x432 mm).
- **Casters**
  - 4” diameter casters,
  - Locks provided on front set.
- **Refrigeration**
  - Temperature regulated by thermostatic control,
  - Temperature display,
  - Hot gas defrost,
  - Energy-saving non-electric condensate pan,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Expansion valve,
  - Electric fans,
  - Refrigeration capacity: 1456 Btu/h (-22ºF) / 427 W (-30ºC).
- **Electrical**
  - Cord and NEMA 5-15P plug.
  - Electrical connection is 115V / 1ph / 60 Hz.
  - 20 AMP breakers required,

- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

ELEVATION

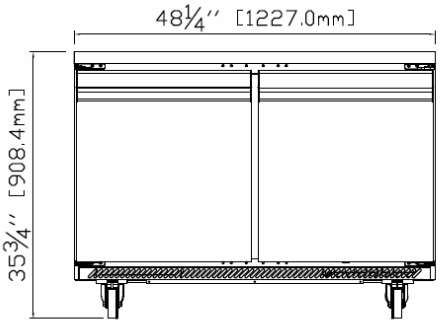

RIGHT VIEW

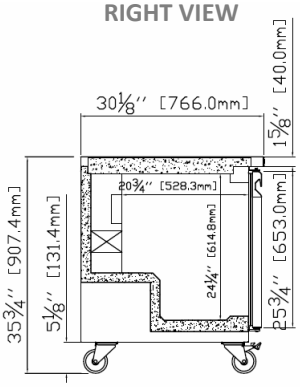

PLAN VIEW

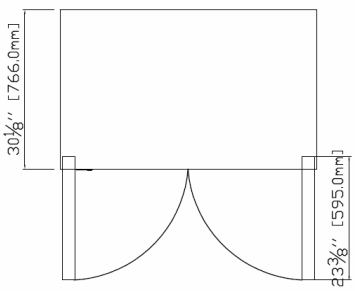

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____

Follow us:

Revision: 01 Date: 04/29/2019 IUC-UC48F_FT_69_1