

HEAVY DUTY RANGES **GRIDDLE and OPEN BURNER** **COMBINATIONS**

IMPERIAL®

Model Numbers

IHR-G18-2 IHR-G24-2
 IHR-G18-2-C IHR-G24-2-C
 IHR-G18-2-XB IHR-G24-2-XB
 IHR-G18-2-M IHR-G24-2-M
 IHR-GT18-2 IHR-GT24-2
 IHR-GT18-2-C IHR-GT24-2-C
 IHR-GT18-2-XB IHR-GT24-2-XB
 IHR-GT18-IHT-M IHR-GT24-2-M



1" (25 mm) thick steel polished griddle plate.



35,000 BTU/hr. (10 KW) anti-clogging, removable burner.



Wavy grates raise pan creating more heat transfer than direct metal-to-metal contact.



"M" shaped burner for even heating throughout the oven cavity.



Accommodate sheet pans front-to-back and side-to-side.



IHR-G18-2 shown with optional stainless steel backguard and shelf

GRIDDLE TOP - Highly polished griddle plate provide even heat across entire surface.

- "U" shaped burners have 30,000 (9 KW) BTU output, located every 12" (305 mm) or 18" (457 mm) with one control per burner. Aeration baffles between burners for quick recovery.
- Manual or thermostatic controls are available.
- 4" (102 mm) wide grease gutter and large grease can with 1 gallon (3.8 L) capacity.

OPEN BURNER - Anti-clogging burner is 21% more efficient than other manufacturers' heavy duty burners.

- 35,000 BTU/hr. (10 KW) output with a 7,000 BTU/hr. low simmer feature.
- One-piece venturi base has no gaskets. Venturi slopes down to the burner creating more efficient heating.
- Cast-iron burners remove and separate for cleaning.- All stainless steel pilot tubing and solid brass top burner valves for a long service life.

GRATES - Wavy grates create more heat transfer. Heat convects in waves for continual heat-to-pan contact.

- Grates measure 12" x 14" (305 x 356 mm) on IHR-G24-2 or 18" x 14" (457 x 356 mm) on IHR-G18-2.
- Cast-iron design features flame shaping center tube for more efficient heat transfer.
- Anti-clogging shield designed into the grate protects the pilot from grease and debris.

STANDARD OVEN - 40,000 BTU/hr (12 KW) oven with 100% safety pilot and manual shut-off valve.

- Unique burner baffle distributes heat flow to provide even temperatures throughout the oven cavity.
- Exclusive heat deflector reflects heat into the oven, not the floor.
- Chef Depth interior is 26-1/2" w x 26" d x 14" h (673 x 660 x 356 mm) and accommodates 18" x 26" (457 x 660) sheet pans left-to-right and front-to-back.
- Porcelainized sides, rear, deck and inner door liner for easy cleaning.
- Superior heavy-duty door hinge.
- Side oven controls are protected in the cool zone.
- One chrome oven rack is included.


CONVECTION OVEN - 35,000 BTU/hr. (10 KW) convection oven with 1/4 hp blower motor cooks products quickly and evenly with less shrinkage.

- Electronic ignition system with a single solenoid valve.
- Convection oven interior dimensions 26-1/2" w x 22-1/2" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- 1/4 hp blower motor.
- Porcelainized sides, rear, deck and door lining for easy cleaning. Stainless steel door gasket.
- Burner "ON" indicator light and one hour manual timer.
- Three chrome oven racks included.



HEAVY DUTY RANGES GRIDDLE and OPEN BURNER COMBINATIONS

IMPERIAL®

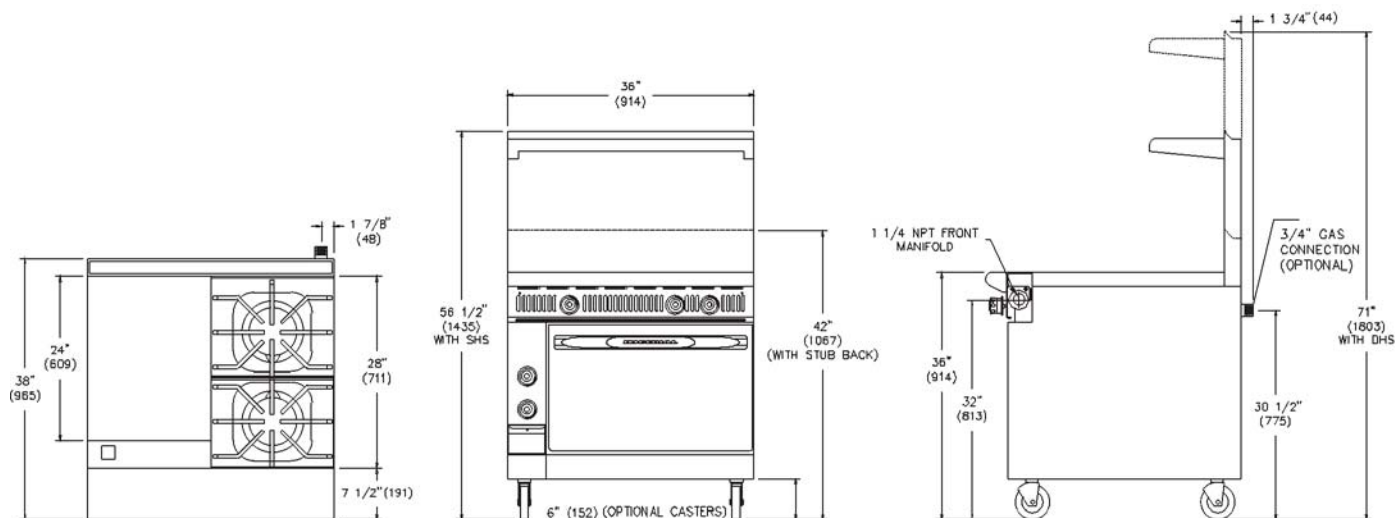

TOP	MODEL	GAS OUTPUT BTU (KW)	GRIDDLE WIDTH	GRATE WIDTH	SHIP WEIGHT (KG) LBS
18" (457 mm)	GRIDDLE WITH MANUAL CONTROLS and TWO 35,000 BTU (10 KW) OPEN BURNERS				
	IHR-G18-2	150,000 (44)	18" (457 mm)	18" (457 mm)	(272) 600
	IHR-G18-2-C	145,000 (43)	18" (457 mm)	18" (457 mm)	(299) 660
	IHR-G18-2-XB	110,000 (32)	18" (457 mm)	18" (457 mm)	(195) 430
	IHR-G18-2-M	110,000 (32)	18" (457 mm)	18" (457 mm)	(148) 325
18" (457 mm)	GRIDDLE WITH THERMOSTATIC CONTROLS and TWO 35,000 BTU (10 KW) OPEN BURNERS				
	IHR-GT18-2	150,000 (44)	18" (457 mm)	18" (457 mm)	(272) 600
	IHR-GT18-2-C	145,000 (43)	18" (457 mm)	18" (457 mm)	(299) 660
	IHR-GT18-2-XB	110,000 (32)	18" (457 mm)	18" (457 mm)	(195) 430
	IHR-GT18-2-M	110,000 (32)	18" (457 mm)	18" (457 mm)	(148) 325
24" (610 mm)	GRIDDLE WITH MANUAL CONTROLS and TWO 35,000 BTU (10 KW) OPEN BURNERS				
	IHR-G24-2	170,000 (50)	24" (610 mm)	12" (305 mm)	(293) 646
	IHR-G24-2-C	165,000 (48)	24" (610 mm)	12" (305 mm)	(320) 706
	IHR-G24-2-XB	130,000 (38)	24" (610 mm)	12" (305 mm)	(216) 476
	IHR-G24-2-M	130,000 (38)	24" (610 mm)	12" (305 mm)	(168) 371
24" (610 mm)	GRIDDLE WITH THERMOSTATIC CONTROLS and TWO 35,000 BTU (10 KW) OPEN BURNERS				
	IHR-GT24-2	170,000 (50)	24" (610 mm)	12" (305 mm)	(293) 646
	IHR-GT24-2-C	165,000 (48)	24" (610 mm)	12" (305 mm)	(320) 706
	IHR-GT24-2-XB	130,000 (38)	24" (610 mm)	12" (305 mm)	(216) 476
	IHR-GT24-2-M	130,000 (38)	24" (610 mm)	12" (305 mm)	(168) 371

Measurements in () are metric equivalents.

NOTES

- "C" specifies (1) 26-1/2" (673 mm) Convection Oven - "XB" specifies (1) Cabinet Base
- "M" specifies Modular, Counter Top Model - "G" specifies Griddle Top with Manual Controls
- "GT" specifies Griddle Top with Thermostatic Controls

EXTERIOR

- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Large 7" (177 mm) stainless steel landing ledge
- Control knobs are durable cast aluminum with a heat protection grip
- Full width, removable crumb tray for easy cleaning
- 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty

MANIFOLD PRESSURE		MANIFOLD SIZE	CONVECTION OVEN ELECTRICAL		
NATURAL GAS	PROPANE GAS		VOLTS	PHASE	AMPS
5.0" W.C.	10.0" W.C.	1-1/4"	120V	1	6

Specify elevation, if over 2,000 ft.

6ft. (1829 mm) power cord with 3 prong plug provided

DIMENSIONS	CRATED DIMENSIONS
36" w x 38" d x 36" h* (914 x 965 x 914 mm)	39-1/2" w x 41" d x 35" h (1003 x 1041 x 889 mm)
* to cooktop	

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Heavy duty stainless steel backguards
- Salamander or Cheesemelter Infra-red Broilers
- Reinforcement channels for mounting cheesemelter/salamander
- Stainless steel common front landing ledge 54", 72", 90", 108" (1372, 1829, 2286, 2743 mm)
- Stainless steel 10" (245 mm) wok ring, fits over open burner top grate
- Stainless steel interior on open cabinet base
- Stainless steel double doors on open cabinet base
- Stainless steel center shelf in open cabinet base
- Extra chrome racks
- 3/4" rear gas connection for single unit connection
- 1-1/4" rear gas connection batteries up to 600,000 BTU (176 KW)
- Gas shut off valve, 3/4" or 1-1/4", N.P.T.
- Gas pressure regulator, 3/4" or 1-1/4", N.P.T.
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4", N.P.T.
- 6" (152 mm) casters



IMPERIAL®

H-8

2/13/14

© 2014 Imperial Commercial Cooking Equipment

Printed in the U.S.A.

Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates.

1128 Sherborn Street Corona, CA 92879
800.343.7790 Ph: 951.281.1830 Fx: 951.281.1879
www.imperialrange.com
E-mail: imperialsales@imperialrange.com