

RESTAURANT RANGES

Model Numbers IR-4-G48 IR-12

IR-12-CC	IR-4-G48-CC
IR-12-XB	IR-4-G48-XB
IR-8-G24	IR-2-G60
IR-8-G24-CC	IR-2-G60-CC
IR-8-G24-XB	IR-2-G60-XB
IR-6-G36	IR-G72
IR-6-G36-CC	IR-G72-CC
IR-6-G36-XB	IR-G72-XB



Two rings of flame for even cooking no matter the pan size.



Top grates with anti-clogging pilot shield protect the pilot from grease and debris.



Back grate hot air dam deflects heat onto the stock pot, not the backsplash.



Large 5" (127 mm) stainless steel landing ledge for convenient plating.



Durable cast aluminum with a vylox heat protection grip.



OPEN BURNERS - PyroCentric[™] 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.

- Cast iron PyroCentric burners are standard on all IR Series Ranges.
- Burners are anti-clogging and lift-off and separate for easy cleaning. No gaskets or screws. _
- One standing pilot per burner for instant ignition.

GRATES - Front grates measure 12" x 11" (305 x 279 mm). Back grates are 12" x 13" (305 x 330 mm).

- Back grates are sized for positioning large stock pots directly over burner and feature a hot air dam.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.

GRIDDLE AND RAISED GRIDDLE BROILER -Highly polished 3/4" (19 mm) steel plate. 21" (533 mm) plate depth. 3" (76 mm) wide grease trough.

- Burners have 20,000 (6 KW) BTU/hr. output with a heat deflector every 12" (305) for even heating.
- Large griddle grease can and full width drip tray. Both remove for easy cleaning.

STANDARD OVENS - Linear burner provides even heating throughout the 35,000 BTU (10 KW) oven.

- Unique burner baffle distributes heat flow to provide even temperatures throughout the oven cavity.
- Exclusive heat deflector reflects heat into the oven, not the floor. 100% safety pilot.
- Chef Depth interior is 26-1/2" w x 26" d x 14" h (673 x 660 x 356 mm) and accommodates 18" x 26" _ (457 x 660 mm) sheet pans left-to-right and front-to-back.
- Porcelainized sides, rear, deck and door lining for easy cleaning. Heavy duty door hinge.
- Stamped inner door liner provides extra strength while optimizing heat retention.
- One chrome oven rack included.


CONVECTION OVENS - 30,000 BTU/hr. (9 KW) convection oven with 1/4 hp blower motor cooks products quickly and evenly with less shrinkage.

- Convection oven interior dimensions 26-1/2" w x 22-1/2" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- Porcelainized sides, rear, deck and door lining for easy cleaning. Heavy duty door hinge.
- Three chrome oven racks included.





RESTAURANT RANGES

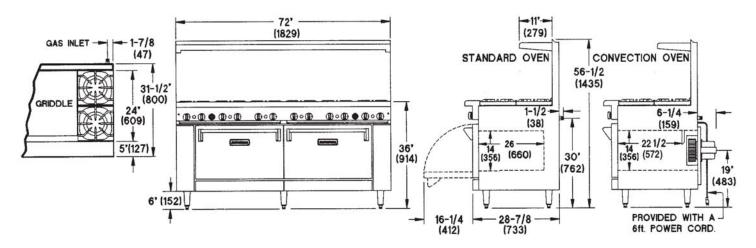

72" RESTAURANT RANGES

		GAS OUTPUT		OPEN	GRIDDLE	SHIP WEIGHT			
TOP	MODEL	BTU	(KW)	BURNERS	WIDTH	(KW)	LBS		
	IR-12	454,000	(133)	12	N/A	(514)	1135		
	IR-12-CC	444,000	(130)	12	N/A	(568)	1255		
	IR-12-XB	419,000	(123)	12	N/A	(493)	1085		
মাক্ষাক্ষাক	IR-8-G24	386,000	(113)	8	24" (610 mm)	(536)	1185		
	IR-8-G24-CC	356,000	(104)	8	24" (610 mm)	(590)	1305		
	IR-8-G24-XB	331,000	(97)	8	24" (610 mm)	(513)	1135		
	IR-6-G36	322,000	(94)	6	36" (914 mm)	(541)	1195		
	IR-6-G36-CC	312,000	(91)	6	36" (914 mm)	(595)	1315		
	IR-6-G36-XB	287,000	(84)	6	36" (914 mm)	(518)	1145		
- NIANA	IR-4-G48	278,000	(81)	4	48" (1219 mm)	(518)	1145		
	IR-4-G48-CC	268,000	(79)	4	48" (1219 mm)	(572)	1265		
	IR-4-G48-XB	243,000	(71)	4	48" (1219 mm)	(495)	1095		
813	IR-2-G60	234,000	(69)	2	60" (1524 mm)	(602)	1330		
	IR-2-G60-CC	224,000	(66)	2	60" (1524 mm)	(656)	1450		
	IR-2-G60-XB	199,000	(58)	2	60" (1524 mm)	(579)	1280		
[]	IR-G72	190,000	(56)	N/A	72" (1829 mm)	(643)	1420		
	IR-G72-CC	180,000	(53)	N/A	72" (1829 mm)	(697)	1540		
0	IR-G72-XB	155,000	(45)	N/A	72" (1829 mm)	(620)	1370		
Measurements in () are metric equivalents									

NOTES

- "CC" specifies (2) 26-1/2" (673 mm) Convection Ovens
- "XB" specifies (1) 26-1/2" (673 mm) Standard Oven and (1) Cabinet Base
- "C-XB" specifies (1) 26-1/2" (673 mm) Convection Oven and (1) Cabinet Base
- "G" specifies Griddle Top, griddle on left is standard
- "RG" specifies Raised Griddle/Broiler Top

EXTERIOR

- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Large 5" (127 mm) stainless steel landing ledge
- Control knobs are durable cast aluminum with a heat protection grip
- Full width, removable crumb tray under open burners for easy cleaning
- 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty



DIMENSIONS			DIMENSIONS			
	72" w x 31-1/2" d x 56-1/2" h		74-1/2" w x 39" d x 35" h			
	(1829 x 800 x 1435 mm)		(1892 x 991 x 889 mm)			
	MANIFOLD PRES	SURE		MANIFOLD		
	NATURAL GAS	PROPAN	E GAS	SIZE		
	5.0" W.C.	10.0" W.C.		3/4" (19 mm)		
	Specify elevation, if over 2,000 ft.					

CRATE

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Reinforcement channels for mounting cheesemelter/salamander
- 6" and 11" (152 and 279 mm) stainless steel backguards
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Wok burner head, interchangeable
- 220V motor and transformer for convection oven
- Extra oven racks
- Thermostatic griddle control
- Grooved griddle plate
- Chrome griddle plate
- Griddle safety valve
- Gas shut off valve 3/4" (19 mm)
- Quick disconnect and flexible gas hose
- 6" (152 mm) casters



1128 Sherborn Street Corona, CA 92879 Ph: 951.281.1830 Fx: 951.281.1879 800.343.7790 www.imperialrange.com E-mail: imperialsales@imperialrange.com

© 2013 Imperial Commercial Cooking Equipment

Printed in the U.S.A.

Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates.