

Model Numbers

MSQ-30

MSQ-36

MSQ-48

MSQ-60



Front chute for easy loading of wood or charcoal.



Heavy duty cast iron 9 Bar grate is ideal for all types of meat.



Durable cast aluminum with a vylox heat protection grip.



MSQ-36 shown with optional drip tray

BROILER INTERIOR - Front chute for easy loading of wood or charcoal.

- Built-in gas log lighter, no lighter fluids or electric starters needed.
- Open grate bottom for optimized air-to-fuel combustion saves wood and charcoal.
- Any type of wood or charcoal may be used.
- Full width, removable ash pan for convenient cleaning.

BURNER SYSTEM - "H" style burner may be used to start up wood during peak periods.


- One 20,000 BTU (6 KW) burner for 30" (762 mm) width.
- One 25,000 BTU (7 KW) burner for 36" (914 mm) width.
- One 30,000 BTU (7 KW) burner for 48" (1219 mm) width.
- Two 20,000 BTU (6 KW) burners for 60" (1524 mm) width.
- Burner is removable for cleaning, no tools required.

TOP GRATE - 6" x 24" (152 x 610 mm) 9 Bar grate sections are heavy duty cast iron construction.

- Ideal for all types of meat and provides attractive markings.
- Removable for cleaning.

EXTERIOR FEATURES - Stainless steel front and sides for cleanability and a professional look.

- Welded and polished stainless steel seams.
- Control knobs are durable cast aluminum with a vylox protection grip.
- Insulated throughout cooktop to conserve energy.
- One year parts and labor warranty.

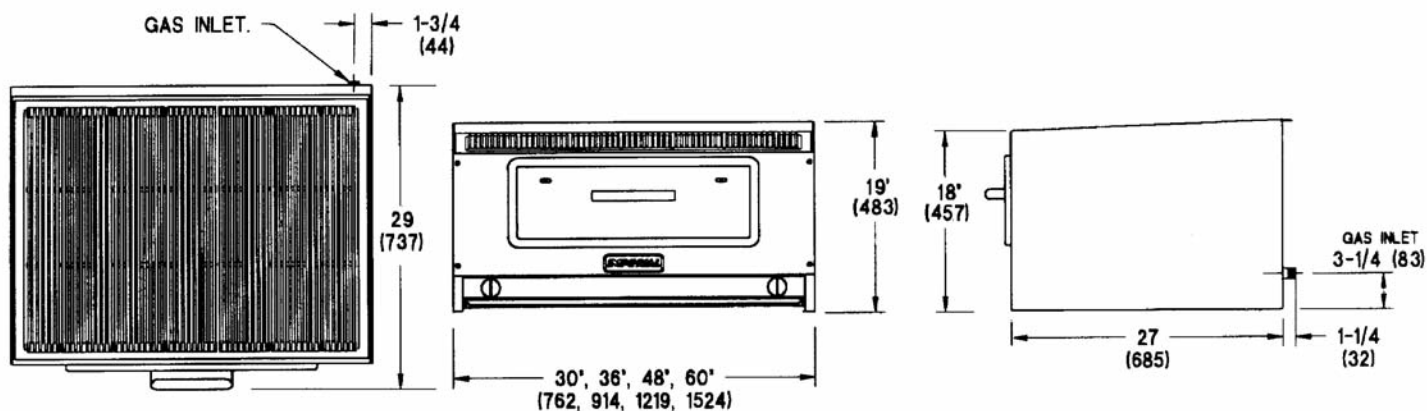

MESQUITE BROILERS

MODEL	WIDTH	NUMBER OF BURNERS	GAS OUTPUT BTU	(KW)	SHIP WEIGHT (KG)	LBS
MSQ-30	30" (762 mm)	1	20,000	(6)	(132)	290
MSQ-36	36" (914 mm)	1	25,000	(7)	(157)	345
MSQ-48	48" (1219 mm)	1	30,000	(9)	(184)	405
MSQ-60	60" (1524 mm)	2	40,000	(10)	(206)	455

Measurements in () are metric equivalents.

MODEL	DIMENSIONS	CRATED DIMENSIONS
MSQ-30	30" w x 27" d x 18" h* (762 x 646 x 457 mm)	32-1/2" w x 31" d x 22" h (826 x 787 x 559 mm)
MSQ-36	36" w x 27" d x 18" h* (914 x 646 x 457 mm)	38-1/2" w x 31" d x 22" h (978 x 737 x 559 mm)
MSQ-48	48" w x 27" d x 18" h* (1219 x 646 x 457 mm)	50-1/2" w x 31" d x 22" h (1283 x 787 x 559 mm)
MSQ-60	60" w x 27" d x 18" h* (1524 x 646 x 457 mm)	62-1/2" w x 31" d x 22" h (1588 x 787 x 59 mm)

* working height

MANIFOLD PRESSURE	MANIFOLD
NATURAL GAS	PROPANE GAS
5.0" W.C.	10.0" W.C.
3/4" (19 mm)	3/4" (19 mm)

Specify elevation, if over 2,000 ft.

CLEARANCE REQUIREMENTS

Legs or stand required for non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- Stainless steel Round Rod top grate designed for chicken
- 12" (305 mm) stainless steel flashing
- Stainless steel drip tray
- 4" (102 mm) legs welded onto broiler
- Gas shut off valve 3/4" (19 mm)
- Quick disconnect and flexible gas hose

NSF