



# CONTROL CENTER MODEL MRS

## 3-BUTTON • MANUAL REVERSE

### SPECIFICATIONS


- 3-button switch with FWD/STOP/REV
- Stainless steel construction
- NEMA 4
- Manual reverse allows increased cutting element life and reduces jams
- Magnetic starter/provides automatic shut-off in case of power interruption
- Operates on line voltage

### VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
MRS-14	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
MRS-15	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
MRS-16	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
MRS-17	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000




### RECOMMENDED INSTALLATION

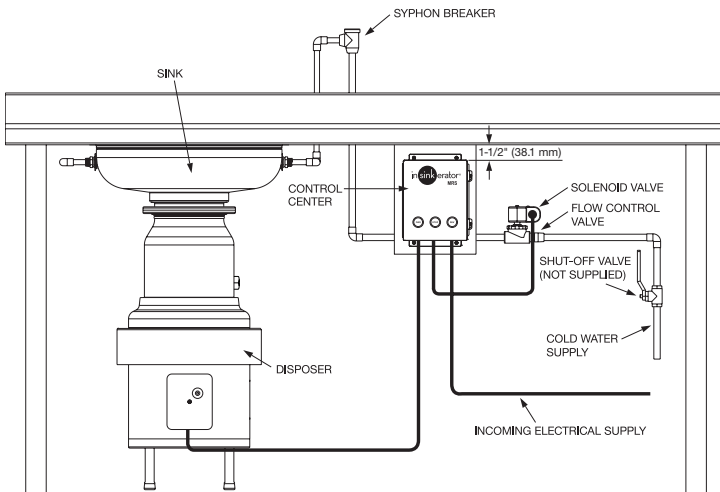

**NOTE:** The MRS control center should be mounted 1-1/2" (38.1 mm) back from the front surface of the table.

### DIMENSIONS

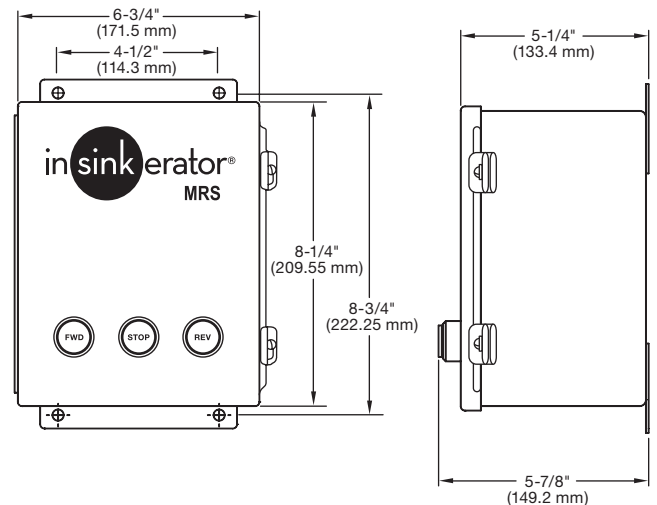

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD Library**, which can be found at [www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice). Product information is also accessible on **The KCL CADalog**. More information is available from KCL at [www.kclcad.com](http://www.kclcad.com).



4700 21st STREET  
 RACINE, WI 53406  
 TEL: 800-845-8345  
 FAX: 262 554-3620  
[www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice)



The Emerson logo is a trademark and a service mark of Emerson Electric Co.

