



CONTROL CENTER MODEL MS

SINGLE DIRECTION

SPECIFICATIONS

- Single direction only
- Push button ON/OFF switch
- High impact polycarbonate construction
- NEMA 4
- Magnetic starter/provides automatic shut-off in case of power interruption
- Operates on line voltage


VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
MS-7	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-8	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-9	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
MS-10	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000




1
YEAR
ON-SITE
PARTS & LABOR
WARRANTY

RECOMMENDED INSTALLATION

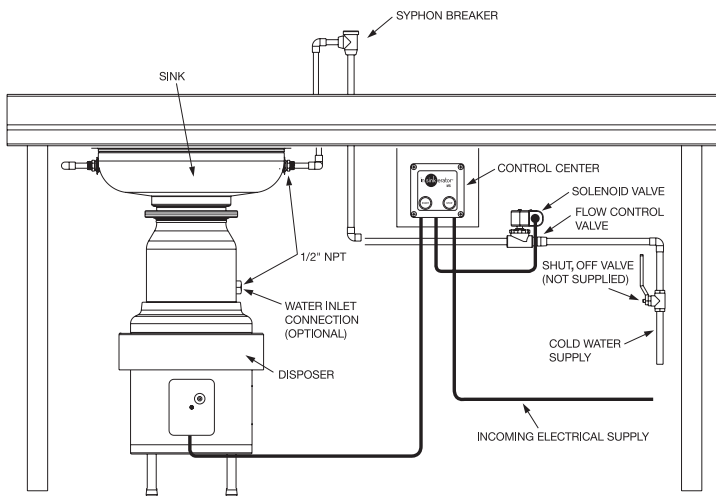

DIMENSIONS

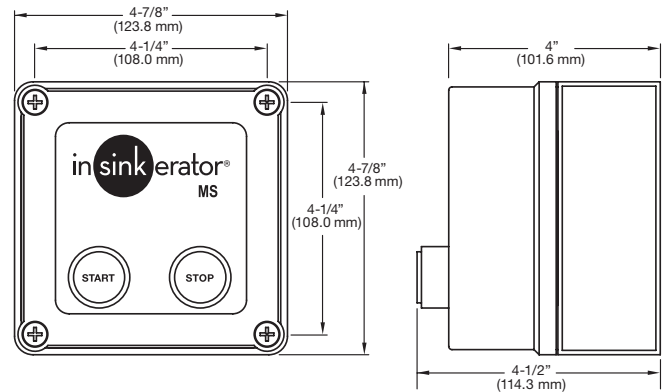

NOTE: Use a #8 screw to mount control.

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD Library**, which can be found at www.insinkerator.com/foodservice. Product information is also accessible on **The KCL CADalog**. More information is available from KCL at www.kclcad.com.



4700 21st STREET
RACINE, WI 53406
TEL: 800-845-8345
FAX: 262 554-3620
www.insinkerator.com/foodservice



The Emerson logo is a trademark and a service mark of Emerson Electric Co.

