



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**MODEL: ICT-VIP2300B1/3SOLIDLID**

**COUNTER TOP:**

**Refrigerated ingredient displays – Solid lid**

**Important:** Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.



**General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODEL	Dimensions (inches) (mm)			Nº Lid	Nº Pans	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
ICT-VIP2300 B1/3solidlid	90-1/2 2300	16-1/4 413	10-1/4 260	1	10	R134a	0.72 330	39°F/41°F 4°C/6°C	2.86 81	1/6	1.82	174 79

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 7042 N.W. 46th Street  
 Miami, FL 33166  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

**www.infrico.us**  
 service@infrico.com  
 sales@infrico.com

**APPROVALS: AVAILABLE AT:**





Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

MODEL: **ICT-VIP2300B1/3SOLIDLID**

**COUNTER TOP:**  
 Refrigerated ingredient displays – Solid lid

## STANDARD FEATURES

### ➤ Exterior

- AISI 304 Stainless Steel.
- AISI 304 Stainless Steel lid,
- Levelling feet.

### ➤ Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- Stainless steel 6" deep pans, included.

### ➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

### ➤ Refrigeration

- Digital temperature controller with automatic defrost system,
- Cold wall refrigeration system,
- Refrigeration capacity: 973 Btu/h (14°F) / 190 W (-10°C).

## OPTIONAL FEATURES

- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

### ➤ Electrical


- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.




- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

## PLAN VIEW


### ELEVATION

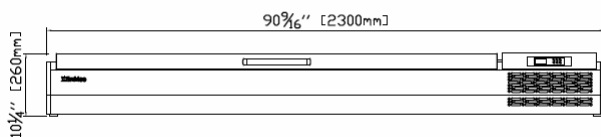

### PLAN VIEW

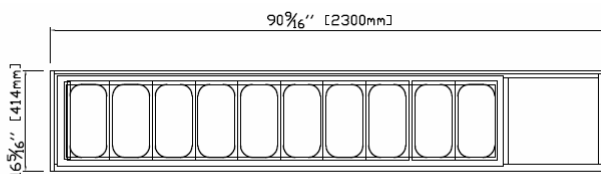

### RIGHT VIEW



ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 7042 N.W. 46th Street  
 Miami, FL 33166  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

**www.infrico.us**  
 service@infrico.com  
 sales@infrico.com

**APPROVALS: AVAILABLE AT:**

Follow us:

Revision: 03 Date: 02/09/2015 VIP2300B1/3SOLIDLID\_FT\_62\_3