



Infrico

USA

FOODSERVICE
CATALOG

'23

infrico.us



ETI LISTED IN U.S. Patent and Trademark Office. We reserve the right to change specifications without notice. Non contractual pictures.

Infra

Welcome to INFRICO FACTORY STORY!

INFRICO is a Family owned & operated Manufacturer based out of the Southern region of Spain, a major Global Market Player for almost 35 years in the production & sales of “HIGH SPEC” Commercial Refrigeration Equipment. With our NORTH AMERICA H.Q. located in Miami FL, our products are distributed across the United States since 2011 with incredible success.

Our line is design driven, perfect for almost any type of environment, whether you work with bakeries gourmet cafés, luxury hotels & resorts, restaurants, entertainment parks, casinos, schools, airports, sport stadiums, grocery stores, or supermarkets. Part of this success comes from the strong relationships we keep building with our Customers, Dealers and Consultants throughout the country, who contribute enormously in specifying our products for multiple high-level jobs.

We carry a vast supply of parts stocked locally and have been able to establish a solid U.S. service network with access to **the top** authorized **service agents across the country.** Our **equipment is** stocked in Miami, FL and manufactured in Spain, under the highest international quality manufacturing standards **and regulations.**

Our product line is probably one of the largest ones in the industry, with an incredible diversified range of options such as Reach-ins, Wine coolers, Under counters, Prep Tables, Retro Refrigerators, Blast Chillers & Shock Freezers, Sushi Cases, Supermarket cases, Euro-style bakery cases, Gelato cases, Air Curtains Grab n’ Go cases, and much more...

We look forward to serving you soon

Infrico USA
North America Division



Grupo Infrico



1.722.220 square ft. facility dedicated to the production of state-of-the-art commercial refrigeration equipment.



16 Branches.



3 factories.





Grupo Infrico®

INFRICO was established in 1986 with a clear objective: to produce the best refrigeration solutions adapted to the specific needs of each customer.

Technological vanguard, certified quality and the excellence of its products are the guarantees to support its commitment to innovation. This is what has positioned Infrico as one of leading commercial refrigeration equipment manufacturer.

The company offers a very wide range of equipment that covers everything related

to refrigeration for the **Foodservice** sector to include, bakery, pastry, ice cream, wine cooler equipment and more, also **Supermarket Retail Equipment**.

Infrico has customers around the world and a large share of the national market, as we continue the growth process and expansion throughout the world. Infrico currently has more than five hundred employees spread across 13 branches in Spain and 16 abroad.



The technical data is subject to possible variations that will be updated periodically in the product spec sheets, which are available on our website.



Infrico's Features & Benefits



Sanitation

- Rounded interior corners.
- 4" Diameter caster with locks.
- Internal drain plug for pressure cleaning.




Cabinet

- Insulation with free CFC's.
- Exterior and Interior built-in AISI 304 & 430 Stainless Steel.



Doors

- Hinges built with self-closing system and stay open door mechanism.
- Triple chamber door gasket for easy removal.
- Integrated door handles.
- Field reversible door feature available on single section uprights and all our horizontal equipment.

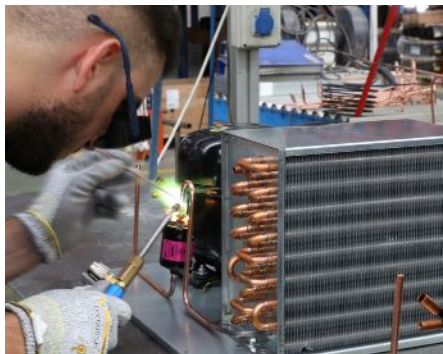

Control system

- High precision temperature control.
- The temperature probes are NTC type.
- Automatic defrost cycle.
- Control of the final defrost temperature.



Refrigeration system

- Removable condensing units.
- Anti-corrosion evaporators.
- Monoblock [INFRIBLOCK®] on our top mounted equipment, for easy service, cleaning and repair.
- Expansion valve [AGB-AN Line].
- Capillary system.
- 100% Polyester coated evaporators.



100% Tested

- Helium gas chambers called "GALILEO TP", to prevent refrigerant leaks.
- Nitrogen - Helium - Refrigerant. Individually tested.
- Audited and certified by INTERTEK to fulfill the UL 471 and NSF-7 standards; applicable in the U.S. and Canada.

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures





 **09. ECO efficiency-DOE approved**


 **Quality assurance & continuous improvement**


- Our laboratories are approved according to Council Directive DC 2004/108/CE of Electrical Safety and Electromagnetic Compatibility DC 2006/95/CE.


 **Customer service**


- INFRICO offers a 2 years parts & labor warranty for all products. Includes a 6 year compressor warranty.


-  Infrico, continues its policy of respecting and preserving the environment certified by ISO 14001:2004.
-  Compliant with all federal requirements. Some of our initiatives include waste reduction, recycling and friendly packaging solutions.


-  Committed to eco-design, and reduced energy consumption.


-  CFC's free polyurethane insulation, high-pressure injected with density of 40 Kg/m³. Use of R-134a & R-404A refrigerants.


-  LED lighting, reducing energy consumption by 90% compared to traditional fluorescent lights.


-  Oversized Condensers & Evaporators to improve energy efficiency and performance.

-  Coated Condensers & Evaporators with anticorrosion material to prevent leaks.


-  Hydrocarbon R-290


-  Hot gas defrost.


-  Triple magnetic chamber gasket to avoid temperature loss.

-  Automatic defrost system.

-  High efficiency EBM fan motors.

-  Doble & Triple tempered glass door with Argon gas

-  -CO₂ Continuous CO₂ reduction initiatives to fight Global Warming .

-  Our product line is approved according DOE compliance.



 **Stock**

- Permanent local stock in Doral FL for immediate delivery.

 **Production**

- Flexibility in production to manufacture a single piece of equipment between 3-4 weeks.
- Deliveries nationwide between 8-10 weeks from factory on special orders.



Infrico New Products



ERC-130

ERC-200



ERC-200 PH BT



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Infrico New Products



**VAR 15
HFG**



**AGN 300
SLIM LINE**



**AGN 600
SLIM LINE**



Infrico Top Sellers



IRT-MR67GT-COMBO



IAG-ML12IM1



IMD-EVV 200 MX



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Infrico Top Sellers



IBC-ABT 201-CBI



IRR-AGB49CR



IAG-SML18CM2

“Visit our Supermarket
Catalog for more
information”



Valid for the entire product guide:

Non contractual pictures.

We reserve the right to change specifications without prior notice.

The technical data is subject to possible variations that will be updated periodically in the product spec sheets, which are available on our website.

Infrico S. L. 2022





INDEX

1. **12**

REACH-IN
REFRIGERATORS
& FREEZERS

2. **38**

BLAST CHILLERS
SHOCK FREEZERS

3. **56**

UNDERCOUNTERS

4. **72**

PREP TABLES

5. **90**

CHEF BASES

6. **98**

COOLERS
& WINE CABINET

7. **124**

DISPLAY CASES

8. **160**

COUNTER TOP
DISPLAY CASES

9. **172**

SUPERMARKET
MULTIDESK
MERCHANDISERS

10. **188**

PARTS & ACCESORIES

1. REACH-IN REFRIGERATORS & FREEZERS





1 REACH-IN REFRIGERATORS & FREEZERS

2 BLAST CHILLERS & SHOCK FREEZERS

3 UNDERCOUNTERS

4 PREP TABLES

5 CHEF BASES

6 COOLERS & WINE CABINET

7 DISPLAY CASES

8 COUNTER TOP DISPLAY CASES

9 SUPERMARKET MULTIDESK MERCHANDISERS

1. Reach-in Refrigerators & Freezers



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Top mounted reach -In Refrigerators

Models	Description	Page
IRR-AGB23	1 Solid Door Refrigerator - 23 ft ³	20-21
IRR-AGB49	2 Solid Door Refrigerator - 49 ft ³	20-21
IRR-AGB23BT	1 Solid Door Freezer - 23 ft ³	22-23
IRR-AGB49BT	2 Solid Door Freezer- 49 ft ³	22-23
IRR-AGB23CR	1 Glass Door Refrigerator - 23 ft ³	24-25
IRR-AGB49CR	2 Glass Door Refrigerator - 49 ft ³	24-25

Roll-In & Roll-thru

Models	Description	Page
IRR-AGB45RI	1 Section Roll-In Refrigerator With 66-1/4" Cart Capacity	26-27
IRR-AGB96RI	2 Section Roll-In Refrigerator With 66-1/4" Cart Capacity	26-27
IRR-AGB45RT	1 Section Roll-Thru Refrigerator With 66-1/4" Cart Capacity	26-27
IRR-AGB45RIBT	1 Section Roll-In Freezer With 66-1/4" Cart Capacity	26-27
IRR-AGB96RIBT	2 Section Roll-In Freezer With 66-1/4" Cart Capacity	26-27



Bottom mounted reach-In, Refrigerators & freezers

Models	Description	Page
IRR-AN23	1 Solid Door Refrigerator - 23 ft ³	28-29
IRR-AN49	2 Solid Door Refrigerator - 49 ft ³	28-29
IRR-AN67	3 Solid Door Refrigerator - 67ft ³	28-29
IRR-AN23BT	1 Solid Door Freezer - 23 ft ³	30-31
IRR-AN49BT	2 Solid Door Cr - 49 ft ³	30-31
IRR-AN67BT	3 Solid Door Freezer - 67 ft ³	30-31
IRR-AN49MX	2 Solid Door Dual Refrigerator & Freezer - 49 ft ³	30-31
IRR-AN23CR	1 Glass Door Refrigerator - 23 ft ³	32-33
IRR-AN49CR	2 Glass Door Refrigerator 49 ft ³	32-33
IRR-AN67CR	3 Glass Door Refrigerator -67 ft ³	32-33
IRR-AN23BTCR	1 Glass Door Freezer - 23 ft ³	34-35
IRR-AN49BTCR	2 Glass Door Freezer 49 ft ³	34-35



Top mounted reach-In, Refrigerators & freezers

Models	Description	Page
IRR-AGN300CR	1 Glass Door Refrigerator	36-37
IRR-AGN301	1 Solid Door Refrigerator	36-37
IRR-AGN301BT	1 Solid Door Freezer	36-37
IRR-AGN600CR	2 Glass Door Refrigerator	36-37
IRR-AGN602	2 Solid Door Refrigerator	36-37
IRR-AGN602BT	2 Solid Door Freezer	36-37
IRR-AGN602MX	2 Solid Door Dual Refrigerator & Freezer	36-37







- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Reach-in refrigerators & freezers Specifications

Top mounted reach-in refrigerators



Exterior

- AISI 304 stainless steel

Interior

- AISI 430 stainless steel
- Sealed interior floors and rounded cabinet corners

Shelving

- Three plastic coated wire shelves per door with stainless steel tray slides included.



Doors

- Polyurethane insulated doors,
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning,



Refrigeration

- Forced air refrigeration system, expansive valve
- Digital temperature controller with automatic defrost system
- Compact refrigeration system monoblock, INFRIBLOCK®
- Energy-saving non-electric condensate pan

- Led lighting
- Internal drain plug for easy cleaning

- Tray slides are compatible with 18"x26" and 12"x20" sheet pans,
- Plastic coated tray divider [except IRR-AGB23 and IRR-AGB23-2]

- Field reversible doors,
- Doors locks,
- Full-height door opening [22-7/8" x 58-5/8"].

- Evaporator coil coated with anticorrosion material 100% Polyester
- 100 °F ambient
- Electronic fans
- Hot gas defrost for low temp units

Bottom mounted reach-in refrigerators



Exterior

- AISI 430 stainless steel

Interior

- AISI 430 stainless steel
- Sealed interior floors and rounded cabinet corners

Shelving

- Three plastic coated wire shelves per door with stainless steel tray slides included



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature,
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning



Refrigeration

- Forced air refrigerators and expansion valve for freezers
- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan

- Led lighting
- Internal drain plug for easy cleaning

- Tray slides are compatible with 18"x26" and 12"x20" sheet pans
- Plastic coated tray divider [except IRR-AN23]

- Field reversible doors
- Doors locks
- Full-height door opening [23"x53"]

- Evaporator coil coated with anti-corrosion material 100% Polyester
- 100 °F ambient
- Electronic fans
- Hot gas defrost for low temp units

Roll-in & roll-thru



Exterior

- AISI 304 stainless steel
- Built with removable panel for easy instalation

Interior

- AISI 304 stainless steel

Shelving

- Three plastic coated wire shelves per door with stainless steel tray slides included.



Doors

- Polyurethane insulated doors,
- Self closing doors with stay open feature
- Triple chamber snap in door seals for easy removal and cleaning



Refrigeration

- Digital temperature controller with automatic defrost system
- Expansion valve and hot gas defrost system for low temp units [Freezer models]

- Insulated bottom side with 0,8" [1 inch] thick with ramp included

- Panel thickness 3-3/16"

- Tray slides are compatible with 18"x26" and 12"x20" sheet pans,
- Plastic coated tray divider [except IRR-AGB23 and IRR-AGB23-2]

- Full-height door opening [27-5/8" x 72-7/8"].
- Heated door frame to avoid accumulation of ice [Freezer models].

- Compact refrigeration system monoblock, INFRIBLOCK®
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Model IRR-AGB49



**3 YEAR
WARRANTY**

Parts & Labor - 6 YEAR COMPRESSOR



Triple chamber snap in door gasket for easy cleaning



Compact monoblock system [AGB models]



Interior features of IRR-AGB23BT



Expansion valve AGB models and AN model freezers

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Top mounted Reach-In refrigerators

AGB Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.




Lighting

LED lighting incorporated, **reducing** energy consumption **between 80% and 90%** compared to a traditional light bulb.



Certifications

Infresco is audited and certified by the international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.

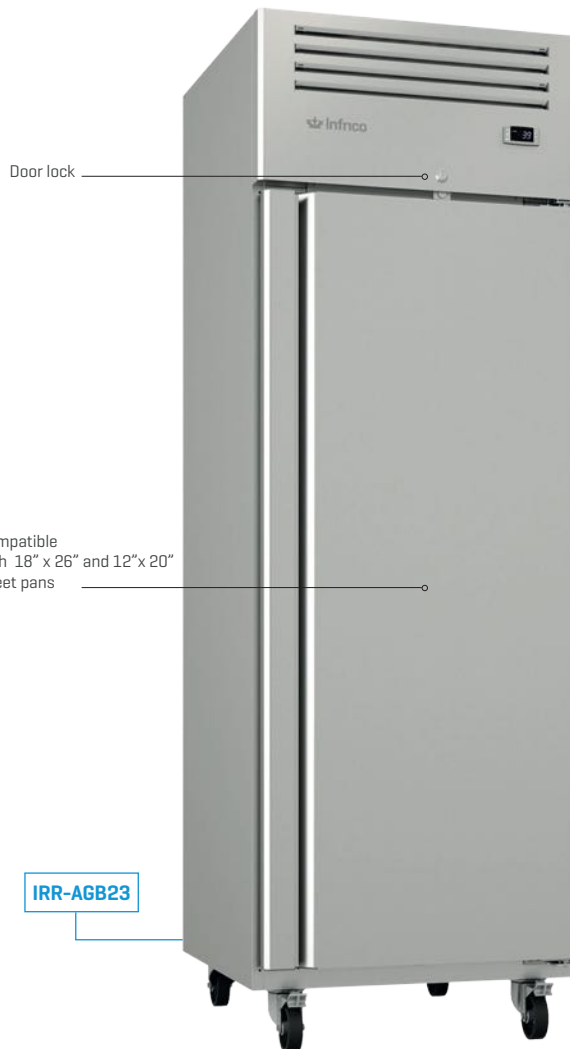

Compact monoblock system



Natural refrigerant R-290
GWP = 0



Expansion valve

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



MOD.	→	↗	↑	🚪	🌀	🌡️	📦	⚙️	⚡	📏	💰
	Overall Dimensions	Doors	Shelves	[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]		
IRR-AGB23	27	31-1/4	84	1	3	33°F/38°F	23.0	1/4	3.8	380	\$9.239
IRR-AGB49	54-1/2	31-1/4	84	2	6	33°F/38°F	49.0	1/3	4.0	700	\$14.096

Height already includes 5-1/8" for casters

Top mounted Reach-In refrigerators

AGB Series

TECHNICAL CHARACTERISTICS



Refrigeration

Monoblock compact **refrigeration** system.

Hot gas defrost [BT].

Electronic fans.

Air cooled condensation system.

Forced air evaporation system.

Evaporative tray without electrical heater for a better energy consumption.



Doors

Doors with **integrated** dual sided **handle** and stay **open hinge**.

Four-chamber flat "seamless" snap-in door gasket easy to remove.

Field reversible doors [AGB23 hardware needed]



IRR-AGB49

STANDARD FEATURES

REFRIGERATION	Expansion valve	Forced air refrigeration system
ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE	Hydrocarbon R-290	
AMBIENT	Temp 100°F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Top mounted reach-In Solid door freezers

AGB Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.




Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



Lighting

LED lighting incorporated, **reducing** energy consumption **between 80% and 90%** compared to a traditional light bulb.

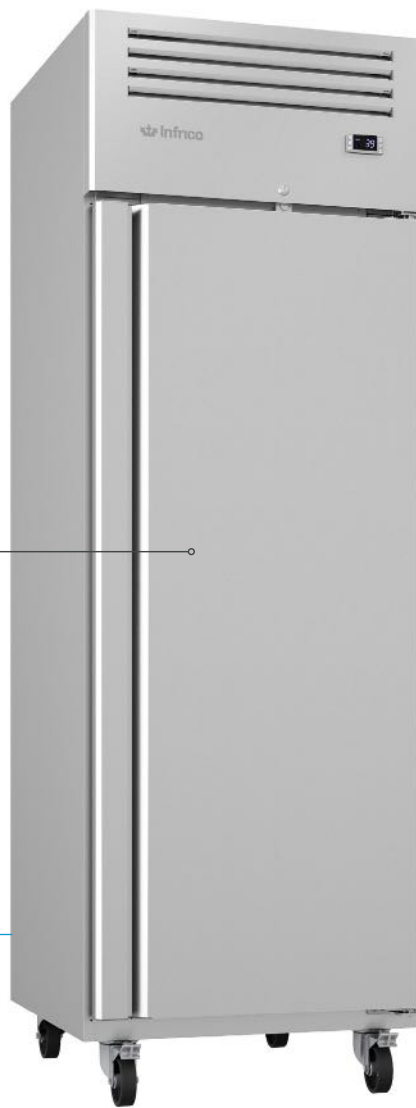

Compact monoblock system



Natural refrigerant R-290
GWP = 0



Expansion valve

IRR-AGB23BT

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.

	Overall Dimensions			Doors	Shelves	[°F]	[ft ³]	[HP]	115V	[Lbs]	[\$]

IRR-AGB23BT	27	31-1/4	84	1	3	-5°F/0°F	23.0	3/4	7.2	375	\$11.229
IRR-AGB49BT	54-1/2	31-1/4	84	2	6	-5°F/0°F	49.0	1-1/4	10.5	620	\$14.884



Top mounted reach-In Solid door freezers

AGB Series

CHARACTERISTICS



Refrigeration

Monoblock compact **refrigeration** system.

Hot gas defrost [BT].

Electronic fans.

Air cooled condensation system.

Forced air evaporation system.

Evaporative tray without electrical heater for a better energy consumption.



Doors

Doors with **integrated** dual sided **handle** and stay **open hinge**.

Four-chamber flat "cleanless" snap-in door gasket easy to remove.

Field reversible doors [AGB23 hardware needed]



STANDARD FEATURES

REFRIGERATION	Expansion valve and hot gas defrost system	
ELECTRICAL	Cord and NEMA 5-20P plug, electrical connection is 115V / 1ph / 60Hz Cord and NEMA 5-15P plug, [AGB 23BT]	
DOE	Hydrocarbon R-290	
DOORS	Heated door frame to avoid accumulation of ice	
AMBIENT	Temp 100°F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Top mounted reach-In Split glass door refrigerators

AGB Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



Lighting

LED lighting incorporated, **reducing** energetic consumption **between 80% and 90%** respect to a traditional light bulb.



Compact monoblock system



Natural refrigerant R-290
GWP = 0



Expansion valve

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.

	Overall Dimensions			Doors	Shelves	[°F]	[ft ³]	[HP]	115V	[Lbs]	[\$]

IRR-AGB23CR	27	31-1/4	84	1	4	33°F/38°F	23.0	1/3	5,0	380	\$9.702
IRR-AGB49CR	54-1/2	31-1/4	84	2	8	33°F/38°F	49.0	1/3	5,2	620	\$13.440

Top mounted reach-In Split glass door refrigerators

AGB Series

TECHNICAL CHARACTERISTICS



Refrigeration

Monoblock compact **refrigeration** system.

Hot gas defrost (BT).

Electronic fans.

Air cooled condensation system.

Forced air evaporation system.

Evaporative tray without electrical heater for a better energy class.



Doors

Doors with **integrated** dual sided **handle** and stay **open hinge**.

Four-chamber flat "cleanless" snap-in door gasket easy to remove.

Field reversible doors [AGB23 hardware needed]

Refrigeration
Air flow



RGB LED lighting
[option]

IRR-AGB49CR



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE	Hydrocarbon R-290	
SHELVING	Plastic coated reinforced wire shelves hold up 155 lb	
DOORS	Door built-in Thermopane double glass [Refrigerators models]	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"



Roll in & Roll Thru Refrigerators & freezers

RI Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Lighting

LED lighting incorporated, **reducing** energy consumption **between 80% and 90%** respect to a traditional lighth bulb.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



IRR-AGB96RI

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



Doors



(°F)



(ft³)



(HP)



115V



[Lbs]



(\$)

MOD.	Overall Dimensions	Doors	(°F)	(ft³)	(HP)	115V	[Lbs]	(\$)
IRR-AGB45RI	37-1/4 41-3/4 93	1	33°F/38°F	45.24	1/2	6	510	\$17.000
IRR-AGB96RI	71-5/8 41-3/4 93	2	33°F/38°F	96.3	5/8	12.3	970	\$22.700
IRR-AGB45RT	37-1/4 41-3/4 93	2	33°F/38°F	45.24	1/2	6	510	\$18.750
IRR-AGB45RIBT	37-1/4 41-3/4 93	1	-5°F/0°F	45.24	5/8	14	510	\$22.700



Roll in & Roll Thru Refrigerators & freezers

RI Series

TECHNICAL CHARACTERISTICS



Refrigeration

Monoblock compact **refrigeration** system.
Air cooled condensation system.
Forced air evaporation system.



Structure

Constructed with removable panels that facilitates its installation in enclosures with narrow doors, 3 inch. thickness.
 Insulated bottom with ramp.



STANDARD FEATURES

ELECTRICAL	For Refrigerators: Cord and NEMA 5-15P plug For Freezers: Cord and NEMA 5-20P plug. / Cord and NEMA L14-30P plug. (AGB 96RIBT) Electrical connection is 115V / 1ph / 60Hz		
DOE	Hydrocarbon R-290		
MAX RACK SIZE	→ 27-1/4	↗ 36-1/4	↑ 71-1/2
EXTERIOR	AISI 304 stainless steel Built with removable panels for easy installation Insulated lower side with 0,8" [1 inch] thick with ramp included Insulated floor with 2,5" [2 inch] thick with ramp included		



Bottom mounted Reach-In refrigerators

AN Series

CHARACTERISTICS



Structure

AISI 430 stainless steel.
Galvanized metal back cover plate.
4 inch casters diameter. Front casters with brake.
Lift-up control panel for easy access to condenser unit.
Lock system. Wide rounded corners to aid cleaning.
Drain inside the cabinet.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471 and NSF 7**.



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



MOD.	→	↗	↑	🚪	🌀	🌡️	📦	⚙️	⚡ [Amps]	📏 [Lbs]	💰 [\$]
	Overall Dimensions			Doors	Shelves	(°F)	(ft ³)	(HP)	115V	[Lbs]	[\$]
IRR-AN23	27	31-3/8	83-1/2	1	3	33°F/38°F	23.0	1/4	3,8	430	\$7.103
IRR-AN49	54-1/2	31-3/8	83-1/2	2	6	33°F/38°F	49.0	1/3	4,0	600	\$9.552
IRR-AN67	82	31-3/8	83-1/2	3	9	33°F/38°F	67.0	1/2	6,1	900	\$12.485

Height already includes 5-1/8" for casters

Bottom mounted Reach-In refrigerators

AN Series

TECHNICAL CHARACTERISTICS



Refrigeration

Temperature regulated by a 30 amp digital controller and automatic defrost.

Air cooled condensation system.

Forced air evaporation system.

Energy-saving non-electric **condensate pan**.

Evaporators treated with anti-corrosion polyester Epoxy.



Doors

Doors with integrated handle and pivoting hinges with stay open mechanism.



Lighting

Highly efficient LED lighting incorporated.



STANDARD FEATURES

REFRIGERATION	Forced air refrigeration and Capillary system	
ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE	Hydrocarbon R-290	
AMBIENT	100F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"



Bottom Mounted Reach-In Freezers

AN Series

CHARACTERISTICS




Structure

AISI 430 stainless steel.
 4 inch casters diameter. Front casters with brake.
 Lift-up control panel for easy access to condenser unit.
 Lock. Wide rounded corners to aid cleaning.
 Drain plug inside the cabinet.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.

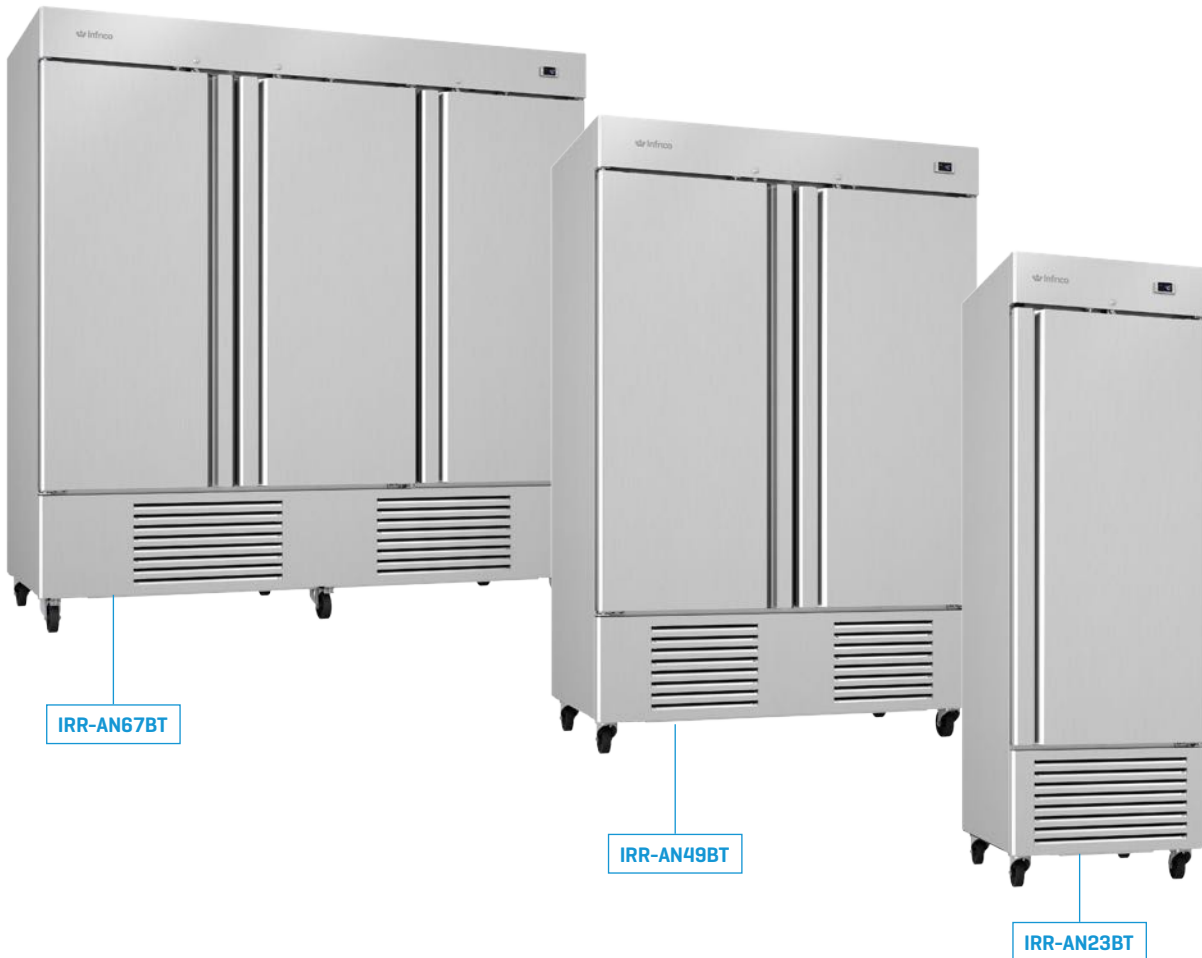

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



SOLID DOORS FREEZERS

Model	Width (in)	Depth (in)	Height (in)	Doors	Shelves	Temp Range (°F)	Volume (ft³)	Power (HP)	115V	220V	Weight (Lbs)	Price (\$)
IRR-AN23BT	27	31-3/8	83-1/2	1	3	-5°F/0°F	23.0	3/4	6.1	-	430	\$9,206
IRR-AN49BT	54-1/2	31-3/8	83-1/2	2	6	-5°F/0°F	49.0	1-1/4	8.7	-	610	\$11,438
IRR-AN67BT	82	31-3/8	83-1/2	3	9	-5°F/0°F	67.0	3/4+3/4	10.6	24	900	\$14,585

DUAL TEMPERATURE REFRIGERATOR AND FREEZER

IRR-AN49MX	54-1/2	31-3/8	83-1/2	2	6	33°F/38°F -5°F/0°F	23.0 23.0	1/4 3/4	10.5	-	700	\$13,230
------------	--------	--------	--------	---	---	-----------------------	--------------	------------	------	---	-----	----------

Height already includes 5-1/8" for casters

Bottom Mounted Reach-In Freezers

AN Series

TECHNICAL CHARACTERISTICS



Refrigeration

- Hot gas defrost** [BT].
- Expansion valve** [BT].
- Electronic fans** [BT].
- Air cooled condensation** system.
- Forced air evaporation** system.
- Energy-saving non-electric **condensate pan**.
- Evaporators treated with anti-corrosion polyester Epoxy.



Lighting

Highly efficient **LED** lighting incorporated.



Certifications

Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.



STANDARD FEATURES

REFRIGERATION	Expansion valve and hot gas defrost system for freezer units Each compartment has its own refrigeration system [MX]	
ELECTRICAL	Electrical connection is 115V/1ph/60Hz Electronic fan motors NEMA 5-15P AN23 BT AN49BT NEMA 5-20P AN67 BT AN49MX	
DOE	Hydrocarbon R-290	
DOORS	Heated door frame to avoid accumulation of ice	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Bottom mounted reach-In Glass door refrigerator

AN Series

CHARACTERISTICS



Structure

- AISI 430** stainless steel.
- Galvanized metal back cover plate.
- 4 inch casters diameter. Front casters with brake.
- Lift-up control panel for easy access to condenser unit.
- Lock system.
- Wide rounded corners to aid cleaning.
- Drain inside the cabinet.



Certifications

Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.

Tray sliders are compatible with 18" x 26" and 12" x 20" sheet pans



IRR-AN23CR



IRR-AN49CR

Reinforced wire shelves

Sealed interior floors and rounded cabinet corners

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



MOD.	Overall Dimensions			Doors	Shelves	(°F)	(ft ³)	(HP)	115V	(Lbs)	(\$)
IRR-AN23CR	27	31-3/8	83-1/2	1	4	33°F/38°F	23.0	1/3	3.8	430	\$8.316
IRR-AN49CR	54-1/2	31-3/8	83-1/2	2	8	33°F/38°F	49.0	1/3	4.9	600	\$12.104
IRR-AN67CR	82	31-3/8	83-1/2	3	12	33°F/38°F	67.0	1/2	6.2	723	\$14.936

Height already includes 5-1/8" for casters

Bottom mounted reach-in Glass door refrigerator

AN Series

TECHNICAL CHARACTERISTICS



Refrigeration

Air cooled condensation system.
Forced air evaporation system.
 Energy-saving non-electric **condensate pan**.
 Evaporators treated with anti-corrosion polyester Epoxy.



Lighting

Highly efficient **LED** lighting incorporated.



RGB LED lighting
[option]

IRR-AN67CR



STANDARD FEATURES

REFRIGERATION	Forced air refrigeration and Capillary system	
ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE	Hydrocarbon R-290	
DOORS	Built-in double Thermopane glass door	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"



Bottom mounted reach-In Glass door freezer

AN Series

CHARACTERISTICS



Structure

- AISI 430** stainless steel.
- Galvanized metal back cover plate.
- 4 inch casters diameter. Front casters with brake.
- Lift-up control panel for easy access to condenser unit.
- Lock system.
- Wide rounded corners to aid cleaning.
- Drain inside the cabinet.



Certifications

InfriCo is audited and certified by the international organization **INTERTEK** in accordance with **UL 471 and NSF 7**.



IRR-AN23CR



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



	Overall Dimensions			Doors	Shelves	(°F)	(ft ³)	(HP)	115V	(Lbs)	(\$)
IRR-AN23BTCR	27	31-3/8	83-1/2	1	4	33°F/38°F	23.0	1/3	3.8	430	\$12.200
IRR-AN49BTCR	54-1/2	31-3/8	83-1/2	2	8	33°F/38°F	49.0	1/3	4.9	600	\$16.500

Height already includes 5-1/8" for casters

Bottom mounted reach-In Glass door refrigerator

AN Series

TECHNICAL CHARACTERISTICS



Refrigeration

Air cooled condensation system.
Forced air evaporation system.
 Energy-saving non-electric **condensate pan**.
 Evaporators treated with anti-corrosion polyester Epoxy.



Lighting

Highly efficient **LED** lighting incorporated.



Tray sliders are compatible with 18" x 26" and 12" x 20" sheet pans



RGB LED lighting [option]



IRR-AN49CR

Reinforced wire shelves

Sealed interior floors and rounded cabinet corners

STANDARD FEATURES

REFRIGERATION	Forced air refrigeration and Capillary system	
ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE	Hydrocarbon R-290	
DOORS	Built-in double Thermopane glass door	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"



Top mounted reach-In Solid door refrigerators

SLIM LINE
AGN Series

CHARACTERISTICS



Lighting

LED lighting incorporated, **reducing** energetic consumption **between 80% and 90%** respect to a traditional light bulb.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



IRR-AGN602



IRR-AGN301

MOD.



MOD.	Overall Dimensions	Doors	Shelves	Temperature (°F)	Volume (ft³)	Power (HP)	Voltage (V)	Weight (Lbs)	Price (\$)
IRR-AGN300CR	19 27-7/8 82-1/16	1	4	36/43 °F	11,5	1/3	4,3	269	\$9.260
IRR-AGN301	19 27-7/8 82-1/16	1	3	33/38 °F	11,5	1/3	4,1	265	\$7.900
IRR-AGN301BT	19 27-7/8 82-1/16	1	3	0 °F	11,5	3/8"	5,6	265	\$9.525
IRR-AGN600CR	38-3/8 27-7/8 82-1/16	2	8	36/43 °F	26,30	3/8	5,8	392	\$12.600
IRR-AGN602	38-3/8 27-7/8 82-1/16	2	6	33 /38 °F	26,30	3/8	5,6	320	\$11.600
IRR-AGN602BT	38-3/8 27-7/8 82-1/16	2	6	0 °F	26,30	3/4	8,5	1,05	\$13.250
IRR-AGN602MX	38-3/8 27-7/8 82-1/16	2	6	33 / 38 / 0 °F	11,5 / 26,30	1/3" - 3/8"	8,08	392	\$15.900

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Top mounted reach-In Glass door refrigerators

SLIM LINE
AGN Series

TECHNICAL CHARACTERISTICS



Refrigeration

Hot gas defrost [BT].

Electronic fans.

Air cooled condensation system.

Forced air evaporation system.

Evaporative tray without electrical heater for a better energy class.

Refrigerant: 134 A



Doors

Doors with **integrated** dual sided **handle** and stay **open hinge**.

Four-chamber flat "cleanless" snap-in door gasket easy to remove.

Field reversible doors



RGB LED lighting
(option)



IRR-AGN300CR

IRR-AGN600CR



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
REFRIGERANT R290		
SHELVING	Plastic coated reinforced wire shelves hold up 155 lb [CR Models]	
DOORS	Door built-in Thermopane double glass [Refrigerators models]	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

2. BLAST CHILLERS SHOCK FREEZERS





REACH-IN
REFRIGERATORS
& FREEZERS
1

BLAST CHILLERS
& SHOCK FREEZERS
2

UNDERCOUNTERS
3

PREP TABLES
4

CHEF BASES
5

COOLERS
& WINE CABINET
6

DISPLAY CASES
7

COUNTER TOP
DISPLAY CASES
8

SUPERMARKET
MULTIDESK
MERCHANDISERS
9

2. Blast chillers/shock freezers



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Index

Blast chillers & shock freezers

Models	Description	Page
	How blast chillers work & cycle functions	46
	Blast chillers/shock freezers	47
	Control panel	48
	Characteristics and applications	49
IBC-ABT3 1S	Blast chillers/shock freezers - 3 trays	50 - 51
IBC-ABT5 1L	Blast chillers/shock freezers - 5 trays	50 - 51
IBC-ABT7 1M	Blast chillers/shock freezers - 7 trays table	50 - 51
IBC-ABT7 1L	Blast chillers/shock freezers - 7 trays	50 - 51
IBC-ABT10 1L	Blast chillers/shock freezers - 10 trays	52 - 53
IBC-ABT14 1L	Blast chillers/shock freezers - 14 trays	52 - 53
IBC-ABT20 1CBI	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55
IBC-ABT20 2CBI	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55
IBC-ABT20 1C	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55
IBC-ABT20 2C	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55
IBC-ABT20 1P	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55
IBC-ABT20 2P	Blast chillers/shock freezers, Roll-in - 20 trays	54 - 55







- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Blast chillers/shock freezers Specifications

IBC-ABT3 1S / IBC-ABT5 1L & IBC-ABT7 1L



Exterior

- AISI 304 stainless steel

- Compliant with HACCP regulations

Interior

- AISI 304 stainless steel
- Sealed interior floors and rounded cabinet corners

- Internal drain plug for easy cleaning.
- Includes a heated conical probe which is easy to use and remove

Shelving

- Compatible with 12" x 20" sheet pans in IBC-ABT31S [3 pans] and IBC-ABT71M [7 pans]

- Compatible with 18"x26" sheet pans in IBC-ABT51L [5 pans] and IBC-ABT71L [7 trays]



Doors

- Polyurethane insulated doors,
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning

- Field reversible doors, except IBC-ABT31S
- Heated door frame to avoid accumulation of ice.

Legs

- Stainless Steel adjustable legs [except IBC-ABT31S]

- Levelling feet, only



Refrigeration

- Forced air refrigeration system, TXV valve
- Digital temperature controller with automatic defrost system
- Compact refrigeration system monoblock, INFRIBLOCK®

- Evaporator coil coated with anticorrosion material 100% Polyester
- 100 °F ambient



Digital control

- Interactive control screen & menu
- Up to 99 different customized cycles
- USB Connection

IBC-ABT10 1L & IBC-ABT14 1L / IBC-ABT20 1C



Exterior

- AISI 304 stainless steel
- Compliant with HACCP regulations

- Compatible with any standard pastry speed cart or combi trolley [only IBC-ABT202C model]

Interior

- AISI 304 stainless steel
- Sealed interior floors and rounded cabinet corners

- Internal drain plug for easy cleaning [only IBC-ABT101L & IBC-ABT141L]
- Includes a heated conical probe which is easy to use and remove

Shelving

- Compatible with any oven [12"x20" and 18"x26" sheet pans] only IBC-ABT101L & IBC-ABT141L



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Heavy-duty hinges with horizontal and vertical adjustment

- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice



Refrigeration

- Control panel with an easy to read screen and menu
- Manual defrost during cycles and automatic defrost during maintenance
- Evaporator coil coated with anti-corrosion material 100% Polyester

- Forced air refrigeration system
- Refrigerant gas R404A
- Drain pan with condensate heater [only IBC-ABT101L & IBC-ABT141L]
- Blast chilling: +194°F to +37°F in less than 90 minutes
- Blast freezing: +194°F to 0°F in less than 4 hours



Digital control

- Interactive control screen & menu

- Up to 99 different customized cycles
- USB Connection

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Model IBC-ABT5 1L



3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR



Triple chamber snap in door gasket for easy cleaning



Self-closing doors with stay open feature



Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning



Touch screen Control panel with an easy to read screen and menu



And also

USB Connection HACCP trazability





AISI 304 Stainless Steel exterior & interior cabinet construction

American compressor TECUMSEH, 115 V 60Hz.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



How blast chillers work & cycle functions

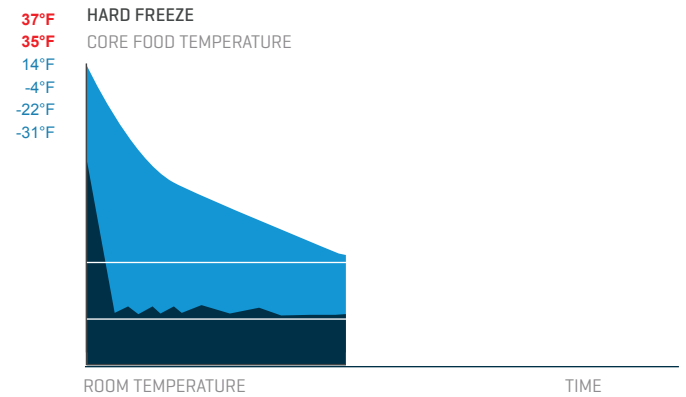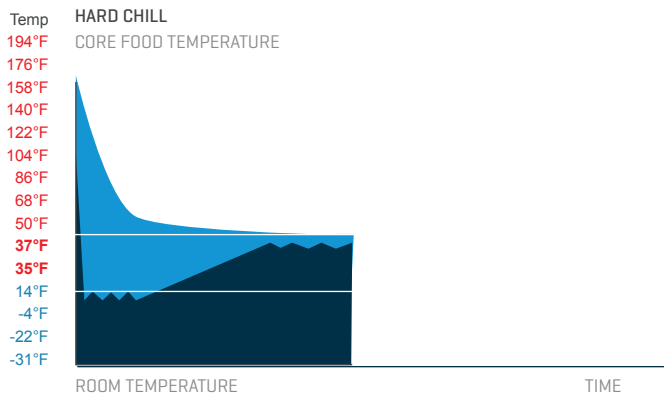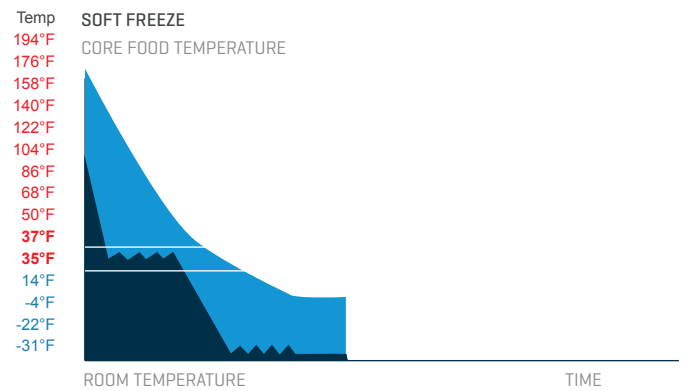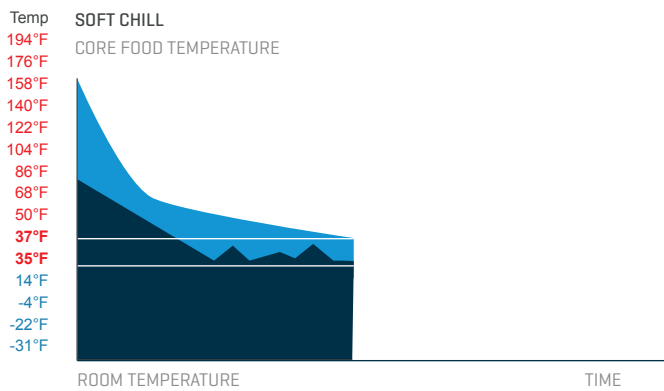

How blast chillers work

Blast chillers quickly reduce the core temperature of the products, whether they are cooked or fresh, conserving their fresh texture, hygiene and quality, while reducing the risk of generating bacteria.

The traditional methods of storing cooked food has always been to leave it to cool naturally until it reaches a suitable temperature to store in the refrigerator.

During the period when the core temperature falls from 149°F to 50°F, food will lose a lot of its natural characteristics, such as moisture, consistency, aroma and color, furthermore, this is when bacteria begins to develop.

INFRICO'S BLAST CHILLERS are designed to reduce the time period for this critical change in temperature.

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Blast chillers/ shock freezers





Blast chilling

Blast chilling allows cooked foods to maintain all of its original characteristics by quickly bringing the temperature down from 194°F to 37°F in less than 90 minutes and maintaining temperature between 32°F and 41°F, conserving the quality, aroma, color and consistency of the food.


Shock freezing

The blast freezing cycle quickly freezes cooked food, transforming the liquid within the food to micro-crystals of ice, without damaging the cellular structure of the food. Internal food temperature falls from 158 °F to -0,4°F in less than 270 minutes.

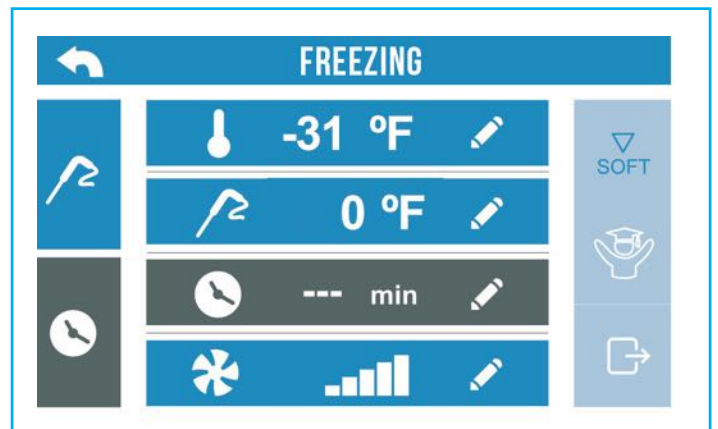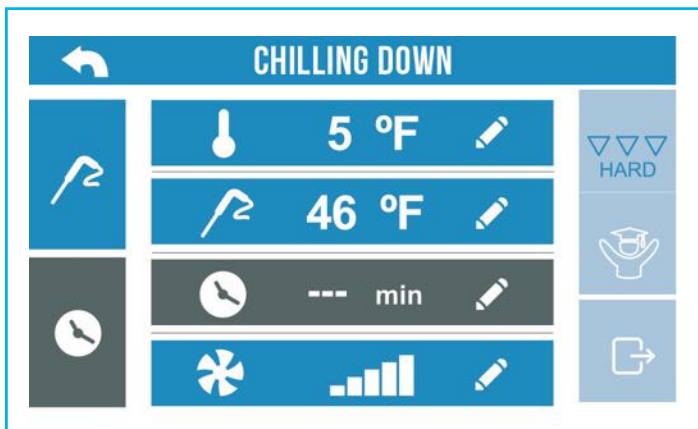





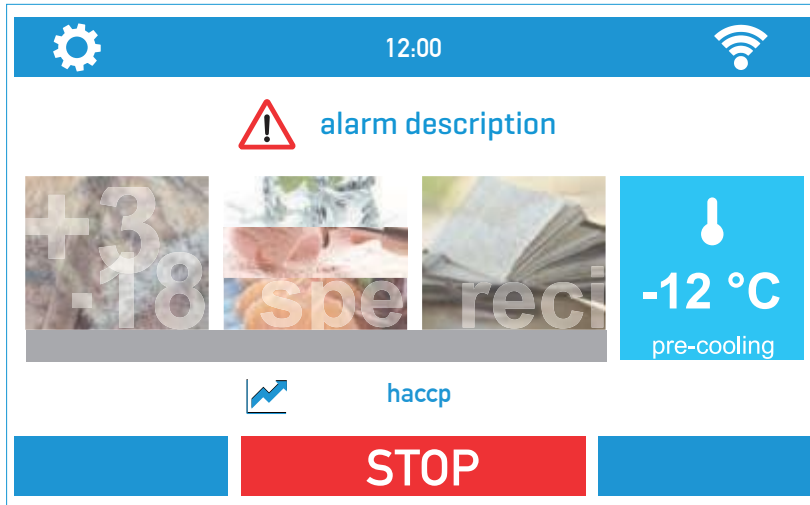






How blast chillers work & cycle functions



MAIN FEATURES

-  Stylish design, flush mounted, user-friendly.
-  Option personalized cycles with 3 regulation phases.
-  User interface with IP65 protection.
-  Management of blast chilling and freezing cycles, both temperature and time controlled, with hard/soft and intensity management functions.
-  Runs a test to check that the needle probe is correctly inserted (including multipoint probes).
-  Real-time graphic display for blast chilling/freezing cycle in progress.

BENEFITS

-  Heated probe.
-  Management of special cycles (fish sanitation, ice cream hardening, etc.)
-  Possibility to personalize 99 programs.


ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Characteristics and applications



High quality

High quality meals at any time, pleasing both the customer and the kitchen chef.



Controlled purchases

Food purchases can be made at any time, making cost savings on seasonal food.




Food safety

Food safety on all your dishes as the chilling process fully conforms to the HACCP regulations.



Saving time

Save by up to 30% of time by preparing meals in batches.



Less waste

Less waste as blast chilled and frozen dishes can be stored for longer periods of time.



Better organization

Better organization in the kitchen, as food can be prepared independently of customer demand.



Less weight loss

Less product weight loss as the humidity and moisture of the food doesn't evaporate.



Blast chiller

Compatible with top main manufacturers.



USB connection

Upload / Download of the configuration parameters.
Upload / Download of the programs.
Download of the information relative to the HACCP alarms.



Wide selection of menus

A wider choice of quality dishes without any health risks.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Blast chillers/shock freezer

ABT Series

CHARACTERISTICS



Structure

AISI 304 Stainless Steel.
Compatible with any ovens.



Leak detection system

All the condensing units are **100% tested**, in a Helium chamber for the detection of gas leakage.



Control

Higher precision in managing temperature settings.
Greater ability to adjust temperature ranges as per end user's requirements.



IRR-ABT3 1S



IRR-ABT5 1L

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



	→	↗	↑	🚪	🌡️	📦	⚙️	⚡	📏	💰
	Overall Dimensions	Doors	(°F)	(ft³)	(HP)	115V	[Lbs]	(\$)		
IBC-ABT3 1S	28-3/8	28	21-9/16	1	-40°F	22/11	1/2	10.6	220	\$13.250
IBC-ABT5 1L	33	34-1/16	39-3/16	1	-40°F	44/26	1	15.1	380	\$17.250
IBC-ABT7 1M	57-13/16	27-9/16	33-1/2	1	-40°F	66/40	1-1/4	16.1	480	\$19.845
IBC-ABT7 1L	33	34-1/8	45-1/4	1	-40°F	66/40	1-1/4	16.1	420	\$19.845

Height already includes 5-1/8" for casters



Blast chillers & shock freezer

ABT Series

TECHNICAL CHARACTERISTICS



Structure

USB connection, to upload/download of the configuration parameters, programs and download of the information relative to the HACCP alarms



Doors

Triple chamber snap-in door gaskets for easy removal. Heated door frame to avoid accumulation of ice.



IRR-ABT7 1L



IRR-ABT7 1M

Blast chilling: +194°F to +37°F in less than 90 minutes.
Blast freezing: +194°F to 0°F in less than 4 hours.

STANDARD FEATURES

SHELVING	Compatible with 12" x 20" sheet pans in IBC-ABT31S (3 pans) and IBC-ABT71M (7 pans). Compatible with 18"x26" sheet pans in IBC-ABT51L (5 pans) and IBC-ABT71L (7 trays).
ELECTRICAL	Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz. MUST BE connected to 30 Amp. circuit breaker!



Blast chillers/shock freezer

ABT Series

CHARACTERISTICS



Structure

AISI 304 Stainless Steel.
Compatible with any oven.



Leak detection system

All the condensing units are **100% tested**, in a Helium chamber for the detection of gas leakage.



Control

Higher precision in managing temperature settings.
Greater ability to adjust of temperature ranges as per end user's requirements.



IBC-ABT10 1L / IBC-ABT14 1L

USB conection HACCP Traceability



Double handle doors and flat gasket easily removable "cleanless".

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



MOD.	Overall Dimensions	Doors	Shelves	(°F)	(HP)	115V	220V	[Lbs]	[\$]
IBC-ABT10 1L	33 34-1/8 68-1/2	1	10	-40°F	2	5	17	600	\$30.043
IBC-ABT14 1L	33 34-1/8 68-1/2	1	14	-40°F	2-1/2	5.6	18	610	\$37.740

Height already includes 5-1/8" for casters



AUTODESK REVIT



Blast chillers/shock freezer

ABT Series

TECHNICAL CHARACTERISTICS



Structure

USB connection, to upload/download of the configuration parameters, programs and download of the information relative to the HACCP alarms



Doors

Triple chamber snap-in door gaskets for easy to removal. Heated door frame to avoid accumulation of ice.



Blast chilling: +194°F to +37°F in less than 90 minutes.
Blast freezing: +194°F to 0°F in less than 4 hours.

STANDARD FEATURES

SHELVING	Compatible with any oven [12"x20" and 18"x26" sheet pans].
ELECTRICAL	Cord and NEMA L14-30P plug, Electrical connection are 220V [Compressor] and 115V [Digital control] / 1ph / 60Hz.

MUST BE connected to 45 Amp. circuit breaker!



Blast chillers/shock freezer Self contained & remote units

ABT Series

CHARACTERISTICS



Structure

AISI 304 Stainless Steel.
Compatible with any ovens.



Leak detection system

All the condensing units are **100% tested, in a Helium chamber** for the detection of gas leakage.



Control

Higher precision in managing temperature settings.
Greater ability to adjust of temperature ranges as per end user's requirements.



IBC-ABT 201 CB1

Car entry



Wheels inside



Pass-through

MOD.

	Overall Dimensions			Doors	(°F)	(ft³)	(HP)	115V	[Lbs]	Car Entry	[\$]
IBC-ABT20 1CBI	47-1/4	43-1/8	97	1	-40°F	180/120	4	21	1093	GN1/1 12X20"	\$59.071
IBC-ABT20 2CBI	55-1/8	51	97-1/16	1	-40°F	180/120	4	21	1235	GN1/1 12X20"	\$75.705
IBC-ABT20 1C	47-1/4	43-1/8	89-3/4	1	-40°F	180/120	Up to 25 Ft.		1093	GN1/1 12X20"	\$48.000
IBC-ABT20 2C	47-1/4	51	89-3/4	1	-40°F	180/120	Up to 25 Ft.		1093	GN2/1 18X26"	\$62.000
IBC-ABT20 1P	47-1/4	46-7/8	89-3/4	2	-40°F	180/120	Up to 25 Ft.		1093	GN1/1 12X20"	\$50.000
IBC-ABT20 2P	47-1/4	51	89-3/4	1	-40°F	180/120	Up to 25 Ft.		1093	GN2/1 18X26"	\$63.000

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Blast chillers/shock freezer Self contained & remote units

ABT Series

TECHNICAL CHARACTERISTICS



Structure

USB connection, to upload/download of the configuration parameters, programs and download of the information relative to the HACCP alarms



Doors

Triple chamber snap-in door gaskets for easy to removal. Heated door frame to avoid accumulation of ice.



STANDARD FEATURES

MAX CAR ENTRY INTERNAL SIZES	IBC-ABT201C/CBI	28-1/2	33	74
	IBC-ABT202C	32-1/2	40	74
ELECTRICAL	Cord only included, Electrical connection is 220V / 3ph / 60Hz. MUST BE connected to 45 Amp. circuit breaker.r!			



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

3. UNDERCOUNTERS





REACH-IN
REFRIGERATORS
& FREEZERS

1

BLAST CHILLERS
& SHOCK FREEZERS

2

UNDERCOUNTERS

3

PREP TABLES

4

CHEF BASES

5

COOLERS
& WINE CABINET

6

DISPLAY CASES

7

COUNTER TOP
DISPLAY CASES

8

SUPERMARKET
MULTIDESK
MERCHANDISERS

9

3.Undercounters



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Index

Undercounter Refrigerators

Models	Description	Page
IUC-UC27R	1 Solid Door Refrigerator - 8 ft ³	64-65
IUC-UC48R	2 Solid Door Refrigerator - 14 ft ³	64-65
IUC-UC60R	2 Solid Door Refrigerator - 17 ft ³	64-65
IUC-UC72R	3 Solid Door Refrigerator - 21 ft ³	64-65



Deep undercounter Refrigerators

Models	Description	Page
IUC-MR41	1 Solid Door Refrigerator - 7.8 ft ³	68-69
IUC-MR67	2 Solid Door Refrigerator - 17 ft ³	68-69
IUC-MR93	3 Solid Door Refrigerator - 27 ft ³	68-69



Undercounter freezers

Models	Description	Page
IUC-UC27F	1 Solid Door Freezer - 8 ft ³	66-67
IUC-UC48F	2 Solid Door Freezer - 14 ft ³	66-67
IUC-UC60F	2 Solid Door Freezer - 17 ft ³	66-67



Deep undercounter freezers

Models	Description	Page
IUC-MR41BT	1 Solid Door Freezer - 7.8 ft ³	70-71
IUC-MR67BT	2 Solid Door Freezer - 17 ft ³	70-71







- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Undercounters Specifications

Undercounters refrigerators & freezers



Exterior

- AISI 430 stainless steel
- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section.



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice, [Models F]
- Field reversible doors
- Door opening WxH: 23-1/4"x21-7/8" [UC27F]; 19-5/8"x21-7/8" [UC48F]; 25-5/8"x21-7/8" [UC60F]



Refrigeration

- Temperature regulated by thermostatic control
- Hot gas defrost, [Models BT, F]
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system

Deep undercounters refrigerators & freezers



Exterior

- AISI 430 stainless steel
- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel
- Internal drain plug for easy cleaning
- Sealed interior floors and rounded cabinet corners

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section.



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice, [Models BT, F]
- Field reversible doors
- Doors locks
- Door opening WxH: 21-5/8" x 20-5/8"



Refrigeration

- Digital temperature controller with automatic defrost system
- Hot gas defrost, [Models BT]
- Energy-saving non-electric condensate pan
- Extractable condensing unit for easy service
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- 100°F ambient

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



AUTODESK
REVIT



Model IUC-MR67 BT



3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR



Triple chamber snap in door gasket for easy cleaning. AISI 430 Stainless Steel Interior & Exterior cabinet construction. AISI 304 Stainless Steel TopT



Self-closing doors with stay open feature

100°F Ambient MR models




Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning



Removable side mounted condensing unit for easy service



Protected digital Controller, with automatic Defrost



Each guide supports up to 132 lb



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Undercounter Refrigerators

UC Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Doors

Doors are equipped with self-closing hinges for automatic return and permanent pressure during closing. The automatic return locks when door opening exceeds 95°. Includes "Three-chamber door gasket easily removable. Doors are field reversible.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international **INTERTEK** in accordance with **UL 471 and NSF 7**.



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



Doors



(°F)



(ft³)



(HP)



115V



[Lbs]



(\$)

MOD.	27-5/8	30-1/8	35-3/4	1	33°F/38°F	8.0	1/4	3.9	270	\$4.920
IUC-UC27R	27-5/8	30-1/8	35-3/4	1	33°F/38°F	8.0	1/4	3.9	270	\$4.920
IUC-UC48R	48-1/8	30-1/8	35-3/4	2	33°F/38°F	14.0	1/4	4.1	354	\$6.439
IUC-UC60R	60-3/8	30-1/8	35-3/4	2	33°F/38°F	17.0	1/4	4.1	430	\$7.132
IUC-UC72R	72-5/8	30-1/8	35-3/4	3	33°F/38°F	21.0	1/3	4.6	506	\$8.195

Height already includes 5-1/8" for casters



Undercounter Refrigerators

UC Series

TECHNICAL CHARACTERISTICS



Refrigeration

Temperature regulated by a thermostatic controller.

Automatic defrost.




Air cooled condensation system.

Forced evaporation system.




Evaporative pan.

Evaporator coil coated with anti-corrosion material.


Front-breathing refrigeration system.



Top drawers



Bottom drawers



Each UC drawer includes one divider bar for different pan configurations.

Other divider bars are available for varying size pan distribution.



IUC-UC2720



STANDARD FEATURES

ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug
DOE	Hydrocarbon R-290	Electronic fan motors
OPTIONAL DRAWER KIT COMPATIBLE WITH:	12"x20" [UC27/UC60] pans 1/2+1/3 [UC48] pans +UC72 [Pans not included]	
OPTIONS Cap.10 [Accessories & parts]	Drawer kit Single Overshelf Double Overshelf	4" Backsplash Set of 2" casters [locking on front set]



Undercounter Freezers

UC Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Doors

Doors are equipped with hinges for automatic return and permanent pressure during closing. The automatic return locks when door opening exceeds 95°. Includes "three-chamber door gasket for easily removal.. Doors are reversible



Certifications

Infrico is audited and certified by an international **INTERTEK** in accordance with **UL 471 and NSF 7**.



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	27-5/8	30-1/8	35-3/4	1	0°F	8.0	1/2	5.0	270	\$6.179
IUC-UC27F	27-5/8	30-1/8	35-3/4	1	0°F	8.0	1/2	5.0	270	\$6.179
IUC-UC48F	48-1/8	30-1/8	35-3/4	2	0°F	14.0	1/2	5.3	360	\$7.588
IUC-UC60F	60-3/8	30-1/8	35-3/4	2	0°F	17.0	1/2	5.3	430	\$9.442

Height already includes 5-1/8" for casters



AUTODESK
REVIT



DOE F-GAS

Undercounter Freezers

UC Series

TECHNICAL CHARACTERISTICS



Refrigeration

Hot gas **defrost** (F).

Air cooled condensation system.

Forced air evaporation system.

Evaporative pan.

Evaporator coil coated with anti-corrosion material.

Front-breathing refrigeration system.

Freezers include **expansion valve**.



STANDARD FEATURES

ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz.	Cord and NEMA 5-15P plug
DOE	Hydrocarbon R-290	
OPTIONS Cap.10 [Accessories & parts]	Single Overshelf Double Overshelf	4" Backsplash Set of 2" casters

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Deep undercounter Refrigerators

MR Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution.**





Control

The control system has a greater precision in the control of the temperature range.



Certifications

Infrico is audited and certified by an international **INTERTEK** in accordance with **UL 471 and NSF 7.**



Optional divider bar
(cod: 10UC2749)

Divider bars are available for varying size pan distribution

Optional divider bar
(cod: 10UC27134)

IUC-MR67



Universal removable guides

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	41-3/8	32-5/8	33-1/8	1	33°F / 38°F	7.8	1/4	4.1	362	\$6.924
IUC-MR41	41-3/8	32-5/8	33-1/8	1	33°F / 38°F	7.8	1/4	4.1	362	\$6.924
IUC-MR67	67-3/8	32-5/8	33-1/8	2	33°F / 38°F	17.0	1/3	4.6	510	\$8.714
IUC-MR93	93-1/4	32-5/8	33-1/8	3	33°F / 38°F	27.0	1/3	4.6	690	\$10.135

Height already includes 5-1/8" for casters



AUTODESK
REVIT



DOE F-GAS

Deep undercounter Refrigerators

MR Series

TECHNICAL CHARACTERISTICS



Refrigeration

Hot gas **defrost** [BT].

Air cooled condensation system.


Forced air evaporation system.

Evaporative tray.

Evaporators treated with anti-corrosion polyester Epoxy.

Condensing unit with slides for its extraction at 3/4.

Heated door frame to avoid ice accumulation [BT].

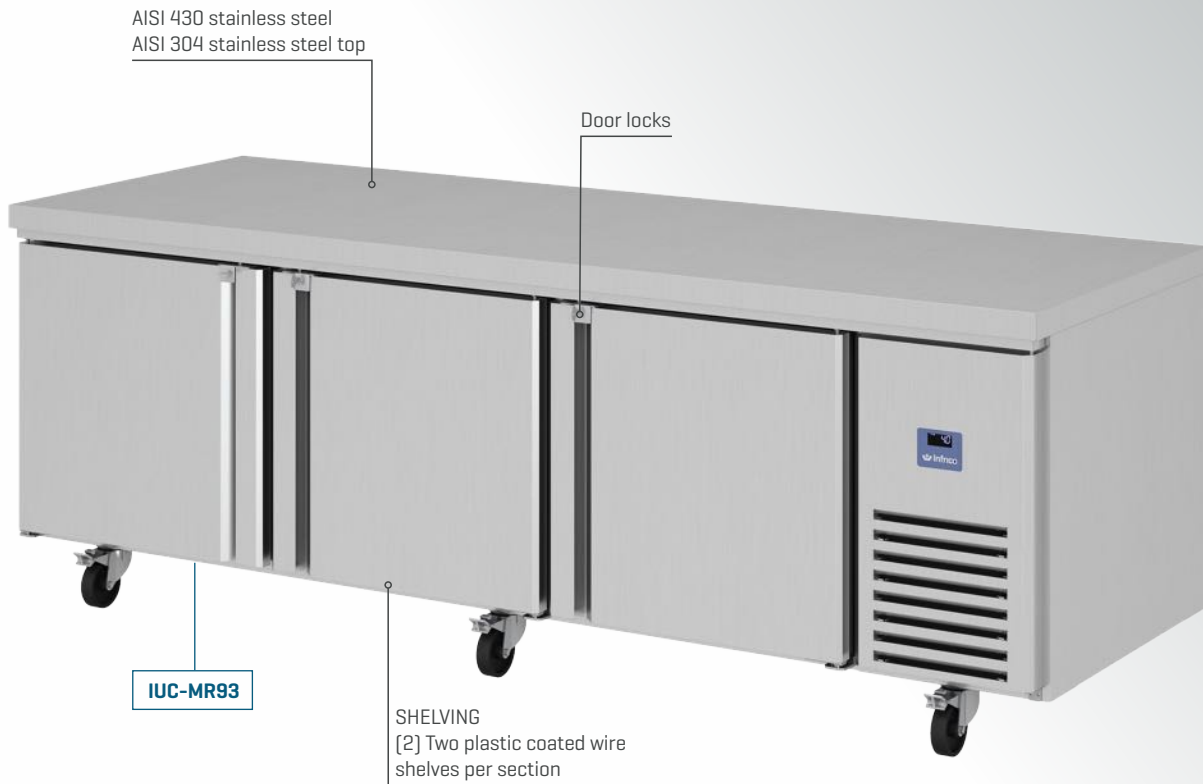

Protected digital Controller, with automatic Defrost

STANDARD FEATURES

ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug
DOE	Hydrocarbon R-290	
OPTIONS Cap.10 (Accessories & parts)	Stainless Steel wire shelves Additional slide kits Drawer kit	Single Overshelf Double Overshelf 4" Backsplash



Deep undercounter Freezers

MR Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Control

The control system has a greater precision in the control of the temperature range.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international **INTERTEK** in accordance with **UL 471 and NSF 7**.



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.

	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	[\$]

IUC-MR41BT	41-3/8	32-5/8	33-1/8	1	0°F	7.8	1/2	5.0	370	\$9.161
IUC-MR67BT	67-3/8	32-5/8	33-1/8	2	0°F	17.0	3/4	7.0	510	\$10.369

Height already includes 5-1/8" for casters

Deep undercounter Freezers

MR Series

TECHNICAL CHARACTERISTICS



Refrigeration

Hot gas **defrost** [BT].

Air cooled condensation system.

Forced air evaporation system..

Evaporative tray.

Evaporators treated with anti-corrosion polyester Epoxy.

Condensing unit with slides for its extraction at 3/4.

Heated door frame to avoid ice accumulation [BT].

IUC-MR93BT



STANDARD FEATURES

ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug
DOE	Hydrocarbon R-290	
OPTIONS Cap.10 (Accessories & parts)	Stainless Steel wire shelves Drawer kit Single Overshelf	Double Overshelf 4" Backsplash

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

4. PREP TABLES





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

4. PREP TABLES



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Index

Sandwich / Salad prep tables

Models	Description	Page
IRT-UC27P	1 Solid Door Refrigerator - 8 pans - 8 ft ³	80-81
IRT-UC48P	2 Solid Door Refrigerator - 12 pans - 14 ft ³	80-81
IRT-UC60P	2 Solid Door Refrigerator - 16 pans - 17 ft ³	80-81
IRT-UC72P	3 Solid Door Refrigerator - 18 pans - 21 ft ³	80-81



Sandwich / Salad prep tables - Megatop

Models	Description	Page
IRT-UC27PMT	1 Solid Door Refrigerator - 12 pans - Megatop - 8 ft ³	82-83
IRT-UC48PMT	2 Solid Door Refrigerator - 18 pans - Megatop - 14 ft ³	82-83
IRT-UC60PMT	2 Solid Door Refrigerator - 24 pans - Megatop - 17 ft ³	82-83
IRT-UC72PMT	3 Solid Door Refrigerator - 27 pans - Megatop - 21 ft ³	82-83



Pizza Prep Tables

Models	Description	Page
IRT-MR41EN	1 Solid Door Refrigerator - 7.8 ft ³	84-85
IRT-MR67EN	2 Solid Door Refrigerator - 17 ft ³	84-85
IRT-MR93EN	3 Solid Door Refrigerator - 27 ft ³	84-85
IRT-MR119EN	4 Solid Door Refrigerator - 39 ft ³	84-85



Granite top pizza prep tables

Models	Description	Page
IUC-MR93-GT COMBO	2 Solid Door Refrigerator - 17 ft ³	86-87
IUC-MR67-GT COMBO	2 Solid Door Refrigerator - 17 ft ³	86-87
IRT-MPG1490 COMBO	3 Solid Door Refrigerator - 27 ft ³	88-89
IRT-MPG1980 COMBO	3 Solid Door Refrigerator - 27 ft ³	88-89







- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Prep tables Specifications

Sandwich salad prep tables & Megatop



Exterior

- AISI 430 stainless steel

- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation

- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section.



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Field reversible doors

- Door opening WxH: 23-1/4"x21-7/8" [UC27P]; 19-5/8"x21-7/8" [UC48P/UC72P]; 25-5/8"x217/8" [UC60P]
- Door opening WxH: 23-1/4"x21-7/8" [UC27PMT]; 19-5/8"x21-7/8" [UC48PMT/UC72PMT]; 25-5/8"x21-7/8" [UC60PMT]



Refrigeration

- Temperature regulated by thermostatic control
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester

- Forced air refrigeration system
- Front-breathing refrigeration system
- Refrigerant gas R290

Pizza prep tables



Exterior

- AISI 430 stainless steel

- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel
- Internal drain plug for easy cleaning.

- Sealed interior floors and rounded cabinet corners

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation

- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section with stainless steel tray slides included

- Compatible with 12"x20" and 18"x26" pans



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning

- Field reversible doors
- Doors locks
- Door opening WxH: 21-5/8" x 20-5/8"



Refrigeration

- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan
- Extractable condensing unit for easy service

- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- Refrigerant gas R290

Granite top pizza prep tables



Exterior

- AISI 430 stainless steel

- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel
- Internal drain plug for easy cleaning.

- Sealed interior floors and rounded cabinet corners

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation

- Low GWP & Zero ODP effect

Shelving

- [1] One plastic coated wire shelves per door with stainless steel tray slides included

- Compatible with 12"x20" pans



Doors

- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning

- Field reversible doors
- Doors locks



Refrigeration

- Digital temperature controller with automatic defrost system
- Extractable condensing unit for easy service
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Drain pan with condensate heater

- Front-breathing refrigeration system
- Refrigeration system independent for table and counter-top ingredient
- Refrigerant gas R290

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Model MR93 EN



3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR



Triple chamber snap in door gasket for easy cleaning



Self-closing doors with stay open feature




Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning



Extractable side mounted condensing unit for easy service



Protected digital Controller, with automatic Defrost



Each guide supports 132 lb



Cutting board 9-1/2" depth



And also

[2] Plastic-coated shelves per section, with stainless steel uni-versal tray slides included. Optional: Stainless Steel shelves

AISI 430 Stainless Steel Interior & Exterior cabinet construction. AISI 304 Stainless Steel Top

Top includes 1/3 size polycarbonate food pans with pan dividers included

4" Diameter Casters with Locks on front set

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Sandwich Salad prep tables

UCP Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Doors

Doors are equipped with stay open mechanism at 95° with self for close hinges. Includes "three-chamber door gasket easily removal. Doors are reversible



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution.**



IRT-UC60P



IRT-UC72P

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

MOD.	27-3/4	30-1/8	46-1/4	1	35°F/41°F	8.0	1/4	3.9	300	\$5.544
IRT-UC27P	27-3/4	30-1/8	46-1/4	1	35°F/41°F	8.0	1/4	3.9	300	\$5.544
IRT-UC48P	48-1/2	30-1/8	46-1/4	2	35°F/41°F	14.0	1/4	4.1	400	\$7.652
IRT-UC60P	60-1/2	30-1/8	46-1/4	2	35°F/41°F	17.0	1/4	4.1	430	\$8.576
IRT-UC72P	72-5/8	30-1/8	46-1/4	3	35°F/41°F	21.0	1/3	4.6	506	\$9.846

Height already includes 5-1/8" for casters



Sandwich Salad prep tables

UC P Series

TECHNICAL CHARACTERISTICS



Refrigeration

Air cooled condensation system.
Forced air evaporation system.

Evaporative pan.

Evaporator coil coated with anti-corrosion material.
Front-breathing refrigeration system.



IRT-UC27P


UC27P



UC48P



UC60P



UC72P



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug	Electrical connection is 115V / 1ph / 60Hz
DOE	R290, electronic fan motors	
SALAD TOP	Stainless steel insulated lid Top includes 1/6 size polycarbonate food pans [UC27P = 8 pans; UC48P = 12 pans; UC60P = 16 pans; UC72P = 18 pans] Pan divider bars included for varying size pan configurations Removable sanitary polyethylene cutting board included Front breathing	
OPTIONS Cap.10 [Accessories & parts]	Drawer kit Flat lid Single oversheff Double oversheff Set of 2" casters [locking on the front set]	

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Sandwich Salad prep tables - Megatop

UC PMT Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Control

The control system has a greater precision in the control of the temperature range.



Certifications

Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.

IRT-UC27PMT



IRT-UC60PMT



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



	→	↗	↑	🚪	🌡️	📦	⚙️	⚡	📏	💰
	Overall Dimensions	Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	(\$)		
IRT-UC27PMT	27-3/4 34-1/8 49	1	35°F/41°F	8.0	1/4	3.9	310	\$6.295		
IRT-UC48PMT	48-1/8 34-1/8 49	2	35°F/41°F	14.0	1/4	4.1	410	\$8.634		
IRT-UC60PMT	60-3/8 34-1/8 49	2	35°F/41°F	17.0	1/4	4.1	500	\$9.442		
IRT-UC72PMT	72-5/8 34-1/8 49	3	35°F/41°F	21.0	1/3	4.6	530	\$10.973		

Height already includes 5-1/8" for casters



Sandwich Salad prep tables - Megatop

UC PMT Series

TECHNICAL CHARACTERISTICS



Refrigeration

Air cooled condensation system.
Forced air evaporation system.

Evaporative pan.

Evaporator coil coated with anti-corrosion material.
Front-breathing refrigeration system.




Cutting board 9-1/2" depth


Insulated top lid

IRT-UC72PMT


UC27PMT



UC48PMT



UC60PMT



UC72PMT



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug	Electrical connection is 115V / 1ph / 60Hz
DOE	R290, electronic fan motors	
SALAD TOP	Stainless steel insulated lid Top includes 1/6 size polycarbonate food pans {UC27PMT = 12 pans; UC48PMT = 18 pans; UC60PMT = 24 pans; UC72PMT = 27 pans}	Pan divider bars included for varying size pan configurations Removable sanitary polyethylene cutting board included Front breathing
OPTIONS	Drawer kit Flat lid Single overshelf	Double overshelf Set of 2" casters [locking on the front set]



Pizza Prep tables

MR GT Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel worktop and sides panels **AISI 430** Stainless Steel.

Completely injected compact structure.
4 inch casters diameter. Breaks provided on front set.



Certifications

Infrico is audited and certified by an international organization **INTERTEK** in accordance with **UL 471 and NSF 7**.



Control

The control system has a greater precision in the control of the temperature. Easier to adjust the temperature range we want to achieve.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Protected digital Controller, with automatic Defrost

IRT-MR67EN

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



Doors



[°F]



[ft³]



[HP]



115V



[Lbs]



[\$]

MOD.	→	↗	↑	Door	[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]
IRT-MR41EN	41-3/8	32-5/8	40-1/4	1/1	35°F/41°F	7.8	1/4	4.1	370	\$8.945
IRT-MR67EN	67-3/8	32-5/8	40-1/4	2/2	35°F/41°F	17.0	1/3	4.6	580	\$10.915
IRT-MR93EN	93-1/4	32-5/8	40-1/4	3/2	35°F/41°F	27	3/4	7.7	690	\$14.438
IRT-MR119EN	119-1/4	32-5/8	40-1/4	4/3	35°F/41°F	39.0	3/4	7.7	800	\$19.504

Height already includes 5-1/8" for casters



AUTODESK
REVIT



Pizza Prep tables

MR GT Series

TECHNICAL CHARACTERISTICS



Refrigeration

Air cooled condensation system.
Forced air evaporation system..

Evaporative tray.

Evaporators treated with anti-corrosion polyester Epoxy.

IRT-MR119EN



Removable shelf.
Universal slides



Two opening position,
hinge reinforced.



18" Work depth.

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug. DOE R290	Electrical connection is 115V / 1ph / 60Hz.
DOE	R290, electronic fan motors	
SALAD TOP	Stainless steel insulated lid. Top includes 1/3 size polycarbonate food pans MRYIEN = 5; MR67EN= 9; MR119EN= 16	Pan divider bars included for varying size pan configurations. Removable sanitary polyethylene cutting board included. Front breathing.
OPTIONS Cap.10 [Accessories & parts]	Stainless Steel wire shelves Additional slide kits Drawer kit	Single oversheff Double oversheff



Granite top pizza Prep tables

MR GT Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471** and **NSF 7**.



New control system

The **new user-friendly controller IP65** has greater **precision in temperature control**. Easier to adjust the temperature range we want to achieve.

IRT-MR93
GT COMBO



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



Doors



(°F)



[ft³]



[HP]



115V



[Lbs]



[\$]

MOD.	93-1/4	32-5/8	64-1/16	3	35°F/41°F	27.0	1/2	6.2	1260	\$19.779
IRT-MR93-GT COMBO	93-1/4	32-5/8	64-1/16	3	35°F/41°F	27.0	1/2	6.2	1260	\$19.779
IRT-MR67-GT COMBO	67-3/8	32-5/8	62-3/4	2	35°F/41°F	17.0	3/8	7.1	950	\$16.372

Height already includes 5-1/8" for casters



Granite top pizza Prep tables

MR GT Series

CHARACTERISTICS



Structure

Compact **structure** totally **injected by** high pressure free CFC's Polyurethane. Zero ODP and Zero GWP.
Granite worktop.



New doors design

New design of **doors with double grip handle. Doors equipped with hinges** for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include four-chamber "cleanless" flat door gasket easily removable.



Refrigeration

Front-breathing ventilation system/ cold plate.
Evaporative tray without electrical heaters.
New **Monoblock** refrigeration system (MPG).

IUC-MR67
GT COMBO



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug Electrical connection is 115V / 1ph / 60Hz
OPTIONS	Stainless Steel wire shelves Additional slide kits

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Granite top pizza Prep tables

MPG Series

CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



New control system

The **new user-friendly controller IP65** has greater **precision in temperature control**. Easier to adjust the temperature range we want to achieve.

IRT-MPG1490 COMBO



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

MOD.	58-5/8	27-1/2	32-3/4 55-3/8	2	33°F/38°F 39°F/41°F	10.4	1/4	6.1	520	\$14.553
IRT-MPG1490 COMBO	78	27-1/2	32-3/4 55-3/8	3	33°F/38°F 39°F/41°F	2.36	1/6	1.82	190	\$17.854
IRT-MPG1980 COMBO										

Height already includes 5-1/8" for casters

Granite top pizza Prep tables

MPG Series

CHARACTERISTICS



Structure

Compact **structure** totally **injected** by high pressure free CFC's Polyurethane. Zero ODP and Zero GWP.
Granite worktop.



New doors design

New design of **doors with double grip handle**. **Doors equipped with hinges** for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include four-chamber "cleanless" flat door gasket easily removable.



Refrigeration

Front-breathing ventilation system/ cold plate.
Evaporative tray without electrical heaters.
New **Monoblock** refrigeration system (MPG).



IRT-MPG1980

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug Electrical connection is 115V / 1ph / 60Hz
OPTIONS	Stainless Steel wire shelves Additional slide kits

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

5.CHEF BASES





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

5.CHEF BASES Index

Chef Bases

Models	Description	Page
IUC-MSG36	Chef Bases - 2 Drawers - 2 (12x20") & 6 (1/6") Pans	96-97
IUC-MSG48	Chef Bases - 2 Drawers - 4 Pans	96-97
IUC-MSG52	Chef Bases - 2 Drawers - 6 Pans	96-97
IUC-MSG52-60	Chef Bases - 2 Drawers - 6 Pans	96-97
IUC-MSG72	Chef Bases - 4 Drawers - 8 Pans	96-97
IUC-MSG96	Chef Bases - 4 Drawers - 12 Pans	96-97
IUC-MSG110	Chef Bases - 6 Drawers - 12 Pans	96-97



Chef bases Specifications

Chef bases



Exterior

- AISI 304 Stainless Steel top. Drip resistant "V" edge protects against spills
- Front and sides in AISI 430 Stainless Steel

Interior

- AISI 430 stainless steel

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Drawers

- Each drawer accommodates two or three full size 12"x20" pans
- Drawers with full-extension sliding rails for complete opening
- Drawers with integrated handle
- Heavy-duty Stainless Steel drawer slides designed to hold up to 440 Lbs.



Refrigeration

- Temperature regulated by thermostatic control
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- Front-breathing refrigeration system
- Refrigerant gas R134a



Electrical

- Cord and NEMA 5-15P plug
- Electrical connection is 115V / 1ph / 60Hz.



Options

- Set of 6" legs, height adjustable from 5" to 8"

**HOLDS UP TO
700 LBS**
[MSG 36, 48, 52]

**HOLDS UP TO
1000 LBS**
[MSG 72, 96, 110]

Model MSG96

And also

- AISI 304 Stainless steel worktop
- Capacity for 12"x20" fullsize pans
- Front and sides in AISI 430 Stainless Steel
- Drip guard marine edge, standard
- 4" Diameter Casters with Locks on front set



Heavy-duty stainless steel drawer slides designed to hold up to 440 Lbs



3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR

Flat top option available



STANDARD FEATURES

OPTIONS

- Stainless Steel wire shelves
- Additional slide kits



Drawers with telescopic guides up to 200 Kg.



Stamped worktop with "V" edge



Casters

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



CHARACTERISTICS



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



Certifications

Infrico is audited and certified by an international organization **INTERTEK** in accordance with **UL 471 and NSF 7**.



Control


The control system has a greater precision in the control of the temperature. Easier to adjust the temperature range we want to achieve.




IUC-MSG-52



IUC-MSG2-60

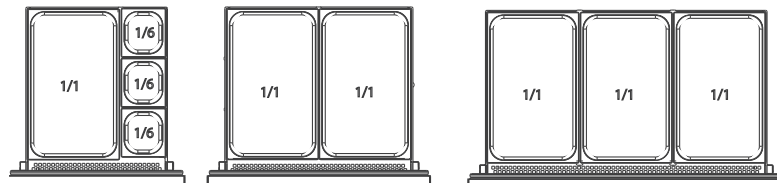

Optional divider Bar [Cod: 10UC2749]



Optional divider Bar [Cod: 10UC2749]

Each MSG drawer includes one divider for different pan configurations. Other divider bars are available for varying size pan distribution

MOD.



Overall Dimensions



Doors



(°F)



(ft³)



(HP)



115V



[Lbs]



[\$]

MOD.	36-5/8	32-1/2	26-1/4	2	33°F/38°F	5.2	1/5	4.8	300	\$9.344
IUC-MSG-36	36-5/8	32-1/2	26-1/4	2	33°F/38°F	5.2	1/5	4.8	300	\$9.344
IUC-MSG-48	48-5/8	32-1/2	26-1/4	2	33°F/38°F	6.8	1/5	4.8	390	\$10.667
IUC-MSG-52	53-1/4	32-1/2	26-1/4	2	33°F/38°F	9.9	1/3	6.5	450	\$11.317
IUC-MSG52-60	60	32-1/2	26-1/4	2	33°F/38°F	9.9	1/3	6.5	450	\$11.317
IUC-MSG-72	72-5/8	32-1/2	26-1/4	4	33°F/38°F	14.3	1/3	6.5	560	\$13.847
IUC-MSG-96	97	32-1/2	26-1/4	4	33°F/38°F	20.6	1/3	6.5	750	\$16.510
IUC-MS-110	110-5/8	32-1/2	26-1/4	6	33°F/38°F	22	1/3	6.9	850	\$19.425

Height already includes 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Chef Bases

MSG Series

TECHNICAL CHARACTERISTICS



Refrigeration

System of **Forced Evaporation**.
Evaporative pan—stainless steel.
 Automatic **defrost**.

Front breathing refrigeration system.

Evaporator coil coated with anti-corrosion material.
 Slide out condensing unit for easy maintenance,
 accessed from behind side panel.

**HOLDS UP TO
700 LBS**
 [MSG 36, 48, 52]

**HOLDS UP TO
1000 LBS**
 [MSG 72, 96, 110]

IUC-MSG-96



Heavy-duty stainless steel drawer slides designed to hold up to 440 Lbs.



AISI 304 Stainless steel worktop with drip guard marine edge.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

6.COOLERS & WINE CABINET





9 SUPERMARKET
MULTIDESK
MERCHANDISERS

8 COUNTER TOP
DISPLAY CASES

7 DISPLAY CASES

6 COOLERS
& WINE CABINET

5 CHEF BASES

4 PREP TABLES

3 UNDERCOUNTERS

2 BLAST CHILLERS
& SHOCK FREEZERS

1 REACH-IN
REFRIGERATORS
& FREEZERS

6. Wine Coolers

Index



RGB LED lighting
(standard)

Back Bar coolers

Models

- IMD-ERV36IIGD
- IMD-ERV60IIGD
- IMD-ERV84IIGD
- IMD-ERV36IISD
- IMD-ERV60IISD
- IMD-ERV84IISD
- IMD-ERV15 IIGD
- IMD-ERV25 IIGD
- IMD-ERV35 IIGD
- IMD-ERV15 GD
- IMD-ERV25 GD
- IMD-ERV35 GD
- IMD-ERV15 SD
- IMD-ERV25 SD
- IMD-ERV35 SD

Description

- Back bar cooler - 1 glass door
- Back bar cooler - 2 glass door
- Back bar cooler - 3 glass door
- Back bar cooler - 1 solid door
- Back bar cooler - 2 solid door
- Back bar cooler - 3 solid door
- Narrow back bar cooler - 1 glass door
- Narrow back bar cooler - 2 glass door
- Narrow back bar cooler - 3 glass door
- Narrow back bar cooler black 1 glass door
- Narrow back bar cooler black 2 glass door
- Narrow back bar cooler black 3 glass door
- Narrow back bar cooler black 1 solid door
- Narrow back bar cooler black 2 solid door
- Narrow back bar cooler black 3 solid door

Page

- 106-107
- 106-107
- 106-107
- 108-109
- 108-109
- 108-109
- 110-111
- 110-111
- 110-111
- 112-113
- 112-113
- 112-113
- 114-115
- 114-115
- 114-115



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Merchandisers

Models	Description	Page
IMD-ERC 100	Sliding door merchandiser - 2 glass door	116-117
IMD-ERC 130	Sliding door merchandiser - 2 glass door	116-117
IMD-ERC 200	Sliding door merchandiser - 3 glass door	116-117
IMD-NEC501RV	Hinged doors minimarket freezer - 1 glass door	118-119
IMD-NEC501FV	Hinged doors minimarket freezer - 1 glass door	118-119
IMD-ERC130PH	Hinged doors minimarket - 2 glass door	118-119
IMD-ERC200PH	Hinged doors minimarket - 3 glass door	118-119
IMD-ERC130PHBT	Hinged doors minimarket freezer - 2 glass door	118-119
IMD-ERC200PHBT	Hinged doors minimarket freezer - 2 glass door	118-119



Wine Cellars / Retro-Wine cellars

Models	Description	Page
IMD-EVV100	Wine cellar- 1 glass door	122
IMD-EVV200MX	Wine cellar- 2 glass door dual zone	122
IMD-EVV23R1G	Single glass door refrigerator, vintage series	123
IMD-EVV49R2G	Double glass door refrigerator, vintage series	123







- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Coolers Specifications

Back bar coolers



Exterior

- AISI 430 stainless steel

Interior

- AISI 430 Stainless Steel
- Sealed interior floors

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section



Doors

- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Doors locks
- Full-height door opening:
WxH= 19-5/8" x 26-7/8"



Refrigeration

- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- Monoblok

Narrow back bar coolers



Exterior

- 430 stainless steel

Interior

- Grey plastic coated steel
- Interior lighting / LED
- Plastic coated wire shelves, adjustable height and easy removal

Insulation

- Free CFC's high density [40kg/m3] polyurethane insulation with low GWP & zero ODP effect



Doors

- Doors with double glass. [6-10-4]
- Integrated lock
- Easy removal gasket
- Integrated handle doors



Refrigeration

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Model ERV 36GD



**3 YEAR
WARRANTY**

Parts & Labor - 6 YEAR COMPRESSOR



Protected digital controller



Removable top to fit 34" counter height



Standard lock



RGB LED lighting
(standard)

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Back bar coolers Glass doors

ERV Series

CHARACTERISTICS



Structure

Stainless Steel **AISI 430**.

Interior LED lighting (GD).

Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³ GWP.

Zero ODP and Low.



Certifications

Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions



	→	↗	↑	🚪	🌡️	📦	⚙️	⚡	📏	💰
	Overall Dimensions	Doors	[°F]	[ft ³]	[HP]	115V	[Lbs]	[\$]		
IMD-ERV36IIGD	36-1/4	23-3/4	34-1/2	1	33°F/38°F	5.72	1/5	3,8	280	\$6.202
IMD-ERV60IIGD	60-3/4	23-3/4	34-1/2	2	33°F/38°F	12.78	1/5	5,2	330	\$8.287
IMD-ERV84IIGD	85-1/4	23-3/4	34-1/2	3	33°F/38°F	19.85	1/3	6	500	\$9.887



Back bar coolers Glass doors

ERV Series

CHARACTERISTICS



Refrigeration

- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan

- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- Monoblok



IMD-ERV84IIGDISD



RGB LED lighting
(standard)



STANDARD FEATURES

ELECTRICAL

Cord and NEMA 5-15P plug,

- Electrical connection is 115V / 1ph / 60Hz.

DOE

Hydrocarbon R-290

OPTIONS Cap.10 (Accessories & parts)

Set of 4" casters,

-Set of 4" casters, front locking.



Back bar coolers Solid doors

ERV Series

CHARACTERISTICS



Structure

- **AISI 430** Stainless Steel.
- Compatible with any ovens.
- Sealed interior floors



Certifications

-Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



AISI 430 Stainless Steel

IMD-ERV36IISD



IMD-ERV60IISD

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

(°F)

(ft²)

(HP)

115V

[Lbs]

[\$]

MOD.	→	↑	Door	Therm	Cube	Fan	Voltage	Weight	Price	
	Overall Dimensions		Doors	(°F)	(ft ²)	(HP)	115V	[Lbs]	[\$]	
IMD-ERV36IISD	36-1/4	23-3/4	34-1/2	1	33°F/38°F	5.72	1/5	3,8	280	\$5.650
IMD-ERV60IISD	60-3/4	23-3/4	34-1/2	2	33°F/38°F	12.78	1/5	5	330	\$6.753
IMD-ERV84IISD	85-1/4	23-3/4	34-1/2	3	33°F/38°F	19.85	1/3	5,7	500	\$8.142



Back bar coolers Solid doors

ERV Series

CHARACTERISTICS



Refrigeration

- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- Monoblok



Doors

- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Doors locks
- Full-height door opening: WxH= 19-5/8"x26-7/8"



IMD-ERV48IISD

Monoblock refrigeration system



Protected digital controller



Removable top to fit 34" counter height



Standard lock

STANDARD FEATURES

ELECTRICAL	- Cord and NEMA 5-15P plug,	- Electrical connection is 115V / 1ph / 60Hz.
DOE	-Hydrocarbon R-290	
OPTIONS Cap.10 [Accessories & parts]	- Set of 4" casters,	-Set of 4" casters, front locking.



Narrow back bar coolers

Stainless steel glass doors

ERV INOX Series

CHARACTERISTICS



Structure

- 430 stainless steel(4).
- Grey plastic coated steel
- Interior lighting / LED
- Plastic coated wire shelves, adjustable height and easy removal



Lighting

LED lighting incorporated, reducing energy consumption **between 80% and 90% compared** respect to a traditional lighth bulb.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.



IMD-ERV25IIGD



IMD-ERV35IIGD

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



	Overall Dimensions			Doors	(°F)	(ft³)	(HP)	115V	[Lbs]	Led	[\$]
IMD-ERV15 IIGD	23-3/4	20-1/8	35-3/4	1	39°F/54°F	5	1/6	3	152	✓	\$4.707
IMD-ERV25 IIGD	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	✓	\$6.052
IMD-ERV35 IIGD	53-1/4	20-1/8	35-3/4	3	39°F/54°F	11.6	1/4	3	284	✓	\$7.415

Narrow back bar coolers Glass doors & solid doors

ERV INOX Series

CHARACTERISTICS



Doors

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors



Refrigeration

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

IMD-ERV25IIGD + IMD-ERV35IIGD



RGB LED lighting
[optional]

STANDARD FEATURES

ELECTRICAL	- Cord and NEMA 5-15P plug,	- Electrical connection is 115V / 1ph / 60Hz.
DOE	- Hydrocarbon R-290	
OPTIONS Cap.10 [Accessories & parts]	- Set of 4" casters,	- Set of 4" casters, front locking.



Narrow back bar coolers black finish glass doors

ERV Series

CHARACTERISTICS



Structure

- 430 stainless steel exterior.
- Grey plastic coated steel interior.
- Interior lighting / LED
- Plastic coated wire shelves, adjustable height and easy removal



Lighting

LED lighting incorporated, reducing energy consumption **between 80% and 90% compared** respect to a traditional light bulb.



RGB LED lighting [optional]



IMD-ERV15 GD

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



	Overall Dimensions			Doors	[°F]	[ft³]	[HP]	115V	[Lbs]	Led	[\$]
IMD-ERV15 GD	23-3/4	20-1/8	35-3/4	1	39°F/54°F	5	1/5	3	152	✓	\$4.458
IMD-ERV25 GD	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	✓	\$5.440
IMD-ERV35 GD	53-1/4	20-1/8	35-3/4	3	39°F/54°F	11.6	1/4	4,10	284	✓	\$6.895

Narrow back bar coolers black finish glass doors

ERV Series

CHARACTERISTICS



Doors

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors



Refrigeration

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray



RGB LED lighting
[optional]



IMD-ERV25 GD

STANDARD FEATURES

ELECTRICAL	- Cord and NEMA 5-15P plug,	- Electrical connection is 115V / 1ph / 60Hz.
	- Refrigerant R134a	
OPTIONS Cap.10 [Accessories & parts]	- Set of 4" casters,	-Set of 4" casters, front locking.



Narrow back bar coolers black finish solid doors

ERV Series

CHARACTERISTICS



Structure

- **AISI 430** Stainless Steel exterior.



Certifications

-Infrico is audited and certified by the international organization **INTERTEK** in accordance with **UL 471** and **NSF 7**.

IMD-ERV15 SD



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

IMD-ERV15 SD	23-3/4	20-1/8	35-3/4	1	33°F/38°F	5	1/5	3	280	\$4.035
IMD-ERV25 SD	35-1/2	20-1/8	35-3/4	2	33°F/38°F	8	1/5	3,4	330	\$4.906
IMD-ERV35 SD	53-1/4	20-1/8	35-3/4	3	33°F/38°F	11,6	1/4	4,6	500	\$6.075



Narrow back bar coolers black finish solid doors

ERV Series

CHARACTERISTICS



Refrigeration

- Digital temperature controller with automatic defrost system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system



Doors

- Doors locks

IMD-ERV25 SD



STANDARD FEATURES

ELECTRICAL	- Cord and NEMA 5-15P plug,	- Electrical connection is 115V / 1ph / 60Hz.
	-Refrigerant R290	
OPTIONS Cap.10 [Accessories & parts]	- Set of 4" casters,	-Set of 4" casters, front locking.



CHARACTERISTICS



New control system

New digital controller with **greater precision** in temperature control. Easier to adjust the temperature range we want to achieve.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared** respect to a traditional light bulb.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.

[Sliding glass]



IMD-ERC130



OPTIONAL CUSTOMIZED



White
Optional



Black
Standar

MOD.

	Overall Dimensions			Doors	[°F]	[ft³]	[HP]	115V [Amps]	[Lbs]	[\$]
IMD-ERC 100	27-3/4	33-1/8	78-7/8	2	39°F/46°F	40	3/4	8,7	350	\$10.000
IMD-ERC 130	31-5/8	33-1/8	78-7/8	2	39°F/46°F	46	3/4	9,2	600	\$12.000
IMD-ERC 200	31-5/8	33-1/8	78-7/8	3	39°F/46°F	72	1	10,8	820	\$16.000

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Sliding Doors

ERC Series

CHARACTERISTICS



Structure

Plastic coated steel exterior.
Compact structure totally injected.



Refrigeration

Ventilated condensation system.
Forced evaporation system.



Doors

Doors with **double pane glass** [6-10-4].



[Sliding glass]

IMD-ERC200



STANDARD FEATURES

ELECTRICAL

Cord and NEMA 5-15P plug / 5-20P plug

Electrical connection is 115V / 1ph / 60Hz.

Hydrocarbon R-290

OPTIONS Cap.10 [Accessories & parts]

Set of 4" casters

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



CHARACTERISTICS



New control system

New digital controller with **greater precision** in temperature control. Easier to adjust the temperature range we want to achieve.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared** respect to a traditional light bulb.



Energy efficiency

Higher energy rating, due to optimized air circulation, **R290 refrigeration** and electronic fans. Producing more **efficient temperature distribution**.

[Sliding glass]



IMD-ERC 200 PHBT



OPTIONAL CUSTOMIZED



White
Optional



Black
Standar

MOD.



Overall Dimensions



Doors



[°F]



[ft³]



[HP]



115V



[Lbs]



[\$]

MOD.	→	↗	↑	Door	[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]
IMD-NEC501RV	27	27-3/8	79-1/8	1	36 °F/46°F	15	1/3	5	300	\$9.000
IMD-NEC501FV	27	27-3/8	79-1/8	1	5°F/-13°F	15	3/4	9	300	\$12.500
IMD-ERC130PH	54-1/2	33-1/8	78-7/8	2	39°F/46°F	40	3/4	9,2	650	\$13.000
IMD-ERC200PH	81-7/8	33-1/8	78-7/8	3	39°F/46°F	63	1	10,8	850	\$17.000
IMD-ERC130PHBT	54-1/2	33-1/8	78-7/8	2	- 0°F	40	1-1/4	16	650	\$18.000
IMD-ERC200PHBT	81-7/8	33-1/8	78-7/8	3	- 0°F	63	1-1/4 + 1-1/4	32	850	\$22.500



Hinged Doors

ERC Series

CHARACTERISTICS



Structure

Plastic coated steel exterior.
Compact structure totally injected.



Refrigeration

Ventilated condensation system.
Forced evaporation system.



Doors

Doors with **double pane glass** (6-10-4).



IMD-ERC130 PH



IMD-NEC501 FV

STANDARD FEATURES

ELECTRICAL

Cord and NEMA 5-15P plug,

Electrical connection is 115V / 1ph / 60Hz.

Hydrocarbon R-290

OPTIONS Cap.10 (Accessories & parts)

Set of 4" casters

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Wine cellars Specifications

Wine cellars



Exterior

- 100% Pine wood exterior (Top, Front, Sides)
- Cherry color standard

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Interior

- Pre-painted steel interior
- LED Lighting

Shelving

- [7] Pre-painted steel wooden front shelves



Doors

- Built-in thermopane double glass
- Triple chamber snap in door gaskets for easy removal and cleaning
- Door locks



Refrigeration

- Digital temperature controller with automatic defrost system
- Evaporator coil coated with anticorrosion material 100% Polyester
- Forced air refrigeration system
- Refrigerant gas R134a
- Recommended temperature: Red wine, 50°F to 64°F / White, Rosé & Brut: 39°F to 46°F
- Split wall for dual temp configuration (MX model)



Electrical

- Cord and NEMA 5-15P plug
- Electrical connection is 115V / 1ph / 60Hz.

Vintage refrigerators



Exterior

- 100% Pine wood exterior (Top, Front, Sides)
- Cherry color standard

Interior

- AISI 430 stainless steel.
- LED Interior lighting.

Insulation

- Free CFC's high density (40kg/m3) polyurethane insulation with low GWP & zero ODP effect.

Shelving

- Stainless steel with wooden pan stop shelves, adjustable height and easy removal. (wooden removable).



Doors

- Wooden Doors with double glass (6-15-5).
- Easy removal triple chamber gasket.
- Door locks.



Refrigeration

- Forced air refrigeration system.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Control of the final defrost temperature.



Electrical

- Cord and NEMA 5-15P plug
- Electrical connection is 115V / 1ph / 60Hz.

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Model EVV200MX



3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR



Cherry color standard.

Each cabinet section has its own refrigeration system [MX]

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



CHARACTERISTICS



Design

These models have been designed for the **exposure** and sale of wine bottles, and represents the best solution for the wine service at the best temperature.



Structure

100 % solid pine wood.

Integrated lock.

7 shelves with wooden front per door, height adjustable and easily replaceable.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90%** compared respect to a traditional ligh bulb.



Doors

Doors are equipped with hinges for **automatic return** and permanent pressure during closing.

Double panel glass (4-8-4), low emissive hardened glass.



Refrigeration

Temperature and automatic defrost regulated by a **digital controller**.

Evaporator treated with anti-corrosion polyester Epoxi. **Ventilated condensation** system.

Ventilated evaporation system.

Recommended temperature for red wine is **10°C to 18°C** / white, rosé and brut is **4°C to 8°C**.



IMD-EVV100



IMD-EVV200MX



Cherry color standard

MOD.



Overall Dimensions



Doors



(°F)



(ft³)



(HP)



115V



[Lbs]



(\$)

MOD.	25 - 7/8	23 - 1/2	75 - 1/2	1	100	39°F/64°F	12	1/4	4.2	360	\$11.320
IMD-EVV100	25 - 7/8	23 - 1/2	75 - 1/2	1	100	39°F/64°F	12	1/4	4.2	360	\$11.320
IMD-EVV200MX	51 - 3/4	23 - 1/2	75 - 1/2	2	100+100	39°F/64°F	12+12	1/4+1/4	8.4	630	\$21.964



Retro-Refrigerator

VINTAGE Series

CHARACTERISTICS



Structure

100 % solid pine wood.
5 shelves with wooden front per door, height adjustable and easily replaceable.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared** respect to a traditional lighth bulb.



Refrigeration

Temperature and automatic defrost regulated by a **digital controller.**

Evaporator treated with anti-corrosion polyester Epoxi.

Ventilated condensation system.


Ventilated evaporation system.



IMD-EVV23R1G



IMD-EVV49R2G

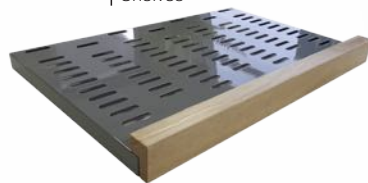








Shelves

OPTIONAL CUSTOMIZED

Cherry color standard



MOD.

											
	Overall Dimensions			Doors		(°F)	(ft³)	(HP)	115V	(Lbs)	(\$)

IMD-EVV23R1G	27-1/8	23-5/8	80	1	90	39°F/64°F	11.3	1/3	4.5	310	\$15.645
IMD-EVV49R2G	54-1/2	23-5/8	80	2	90+90	39°F/64°F	22.6	1/3+1/3	6.65	580	\$22.500

7.DISPLAY CASES





1	REACH-IN REFRIGERATORS & FREEZERS
2	BLAST CHILLERS & SHOCK FREEZERS
3	UNDERCOUNTERS
4	PREP TABLES
5	CHEF BASES
6	COOLERS & WINE CABINET
7	DISPLAY CASES
8	COUNTER TOP DISPLAY CASES
9	SUPERMARKET MULTIDESK MERCHANDISERS

7. Display Cases

Index

Deli - Display cases Straight glass

Models	Description	Page
IDC-VBC9 RCP / SCP	Deli display cases	130-131
IDC-VBC12 RCP / SCP	Deli display cases	130-131
IDC-VBC15 RCP / SCP	Deli display cases	130-131
IDC-VBC18 RCP / SCP	Deli display cases	130-131
IDC-VBC25 RCP / SCP	Deli display cases	130-131
IDC-VBC90AA RCP / SCP	Deli display cases	130-131



Fish - Display cases

Models	Description	Page
IDC-VRP13	Fish display cases	132-133
IDC-VML 12	Fish display cases	132-133
IDC-VML 15	Fish display cases	132-133
IDC-VML 18	Fish display cases	132-133



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Pastry - Display cases

Models	Description	Page
IDC-VBR9R	Pastry display cases curved glass	136
IDC-VBR12R	Pastry display cases curved glass	136
IDC-VBR18R	Pastry display cases curved glass	136
IDC-VBR9SS	Pastry display cases curved glass	137
IDC-VBR12SS	Pastry display cases curved glass	137
IDC-VBR18SS	Pastry display cases curved glass	137
IDC-VBR9PR	Pastry display cases straight glass	140-141
IDC-VBR12PR	Pastry display cases straight glass	140-141
IDC-VBR18PR	Pastry display cases straight glass	140-141
IDC-VBR9FG	Pastry display cases straight glass	144-145
IDC-VBR12FG	Pastry display cases straight glass	144-145
IDC-VBR18FG	Pastry display cases straight glass	144-145
IDC-VC09	Pastry display cases straight glass combo series	148-149
IDC-VC012	Pastry display cases straight glass combo series	148-149
IDC-VC015	Pastry display cases straight glass combo series	148-149
IDC-VC018	Pastry display cases straight glass combo series	148-149



Gelato - Display cases

Models	Description	Page
IDC-VAR12H	Gelato curved glass - Width 49-1/4" - 9.5 ft3	154
IDC-VAR15H	Gelato curved glass - Width 61-1/2" - 15.2 ft3	154
IDC-VAR18H	Gelato curved glass - Width 73-7/8" - 20.2 ft3	154
IDC-VAR12HFG	Gelato flat glass - Width 49-1/4" - 9.5 ft3	155
IDC-VAR15HFG	Gelato flat glass - Width 61-1/2" - 15.2 ft3	155
IDC-VAR18HFG	Gelato flat glass - Width 73-7/8" - 20.2 ft3	155
IDC-VBZ12S	Ice-cream flat glass - Width 49-3/16"	158-159
IDC-VBZ15S	Ice-cream flat glass - Width 61-1/2"	158-159
IDC-VBZ12	Ice-cream flat glass - Width 61-1/2"	158-159
IDC-VBZ15	Ice-cream flat glass - Width 61-1/2"	158-159





Nobody
ever
made
me
fall in love
like
this

BURRITO
TACOS
Fish Tacos
TACO SALAS
Nachos
SALSA



9 SUPERMARKET
MULTIDESK
MERCHANDISERS

8 COUNTER TOP
DISPLAY CASES

7 DISPLAY CASES

6 COOLERS
& WINE CABINET

5 CHEF BASES

4 PREP TABLES

3 UNDERCOUNTERS

2 BLAST CHILLERS
& SHOCK FREEZERS

1 REACH-IN
REFRIGERATORS
& FREEZERS



Deli display cases Straight glass

VBC BARCELONA Series

CHARACTERISTICS




Structure

Modular line design daira for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

- Laminated steel plate
- AISI 304 stainless steel worktop
- Lift-up straight tempered security glass system

- Enamelled steel base
 - DM lacqued decoration
 - Upper profile LED lighting **LED** lighted middle **shelf and exposure surface.**
- Storage **door clearance** of 425x255 mm..

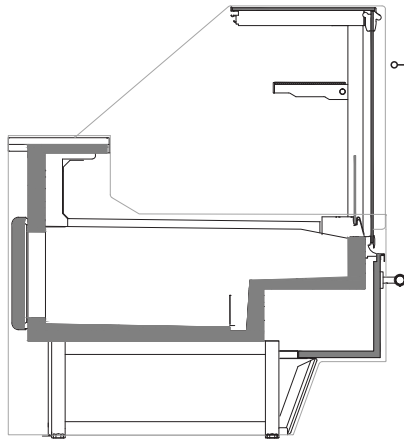

SCP Technical plan: With Storage

RCP: Without Storage
SCP: With Storage

IDC-VBC15RCP



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

IDC-VBC9 RCP / SCP	39-15/16	46-3/8	50-1/2	33°F/41°F	4.63	5/8	4,87	419	\$16.113
IDC-VBC12 RCP / SCP	49-3/16	46-3/8	50-1/2	33°F/41°F	6.18	5/8	10,6	441	\$18.156
IDC-VBC15 RCP / SCP	61-1/2	46-3/8	50-1/2	33°F/41°F	7.73	3/4	9,77	529	\$20.582
IDC-VBC18 RCP / SCP	73-3/4	46-3/8	50-1/2	33°F/41°F	9.28	1	12,6	606	\$22.926
IDC-VBC25 RCP / SCP	100-3/4	46-3/8	50-1/2	33°F/41°F	12.36	1	13,55	661	\$26.565
IDC-VBC90AA RCP / SCP	75-5/8	68-5/16	50-1/2	33°F/41°F	6	5/8	10,6	490	\$26.565

Include sliding doors

Deli display cases Straight glass

VBC BARCELONA Series

CHARACTERISTICS



Refrigeration

- Forced air refrigeration system
- Stainless steel evaporative double trays first by hot gas second by electrical resistance
- Control of the final defrost temperature



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared respect** to a traditional light bulb.



IDC-VBC18SCP + VBC90AARCP

[Standard color]

ELECTRICAL	115V / 1ph /60 Hz
OPTIONS	Colors [page 175]



Fish Display cases

VRP Series

CHARACTERISTICS



Structure

- AISI 304 Stainless Steel, exterior & interior .
- Rear sliding door.
- Curved tempered security glass system.
- Base of enamelled steel tube,
- Internal drain for easy cleaning,



Lighting

- LED lighting.
- 4" diameter casters.
- Static board gravity coil.

IDC-VRP 13



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

(°F)

(ft³)

[HP]

115V

[Lbs]

[\$]

IDC-VRP 13	51-31/32	33-15/32	50-13/64	30°F/34°F	4.06	1/3	4.9	342	\$11.576
IDC-VML 12	52-7/16	35-7/16	52-1/2	30°F/34°F	4.06	1/3	4.9	342	\$11.575
IDC-VML 15	64-3/4	35-7/16	52-1/2	30°F/34°F	8.40	1/2	7.6	401	\$12.734
IDC-VML 18	77-1/16	35-7/16	52-1/2	30°F/34°F	12.71	7/8	8.4	430	\$13.891



Fish Display cases

VML MALAGA Series

CHARACTERISTICS



Refrigeration

- Static board & gravity coil.
- Evaporator coated with anticorrosion polyester and epoxy
- Manual defrost.

IDC-VML15



ELECTRICAL

Cord & NEMA 5-20P Plug.
115V / 1 ph / 60 Hz.

Display the fish on cryshed ice

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Pastry display cases Curved glass



VBR AMBAR Series



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Pastry display cases Curved glass

VBR AMBAR Series

CHARACTERISTICS



Structure

- AISI 304 Stainless steel, including stainless top.
- Heavy duty ball bearing and levelling feet.
- Glass sided panels with thermopane double glass.
- Tilt forward glass opening system.
- Standard decoration: White
- Glass shelves built into silver anodized Aluminum frames.
- Rear sliding doors.
- Built-in thermopane double glass.



Lighting

- LED lighting in canopy and under each glass shelf.



Electrical

- Cord and NEMA 5-20P plug
- Electrical connection is 115V / 1ph / 60Hz.



IDC-VBR9R



IDC-VBR12R



Rear sliding doors with stay open feature

OPTIONAL DECORATION



RAL 9016
White standard



RAL 9017
Black



RAL 3001
Red



RAL 5015
Blue



MOD.



Overall Dimensions

Doors

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	Overall Dimensions	Doors	[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]
IDC-VBR9R	36-15/16 31-7/8 51-3/16	2	39°F/45°F	10.0	1/2	7.8	540	\$15.104
IDC-VBR12R	49-3/16 31-7/8 51-3/16	2	39°F/45°F	13.0	3/4	7.9	650	\$17.246
IDC-VBR18R	73-13/16 31-7/8 51-3/16	3	39°F/45°F	20.0	1	8.8	840	\$21.772

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Pastry display cases Curved glass

VBR AMBAR Series

CHARACTERISTICS



Refrigeration

- Forced air refrigeration system.
- Case engineered to operate at 75°F and 55% relative humidity.
- This product is designed to operate at the following store conditions 75°F and 55% R.H.
- This display refrigerator is not for the display of potentially hazardous foods.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** [Quality]; **ISO 14001: 2015** [Environment]; **OSHAS 18001: 2007** [Worker Safety and Health] and by **INTERTEK** in accordance with **UL 471 and NSF 7**.



**EACH SHELF
HOLDS UP TO
45 LBS**

OPTIONAL DECORATION



RAL 9016
White standard



RAL 9017
Black



RAL 3001
Red



RAL 5015
Blue



Night curtain Standard
and front brackets

MOD.	→	↗	↑	🌡️	📦	⚙️	⚡	🏷️	💰
	Overall Dimensions			(°F)	(ft³)	(HP)	115V	[Lbs]	[\$]
IDC-VBR9SS	36-15/16	31-7/8	51-3/16	39°F/45°F	10.0	1/2	7.8	500	\$15.104
IDC-VBR12SS	49-3/16	31-7/8	51-3/16	39°F/45°F	13.0	3/4	7.9	600	\$17.246
IDC-VBR18SS	73-13/16	31-7/8	51-3/16	39°F/45°F	20.0	1	8.8	840	\$21.772



Pastry display cases Straight glass



VBR AMBAR PR Series



1 REACH-IN REFRIGERATORS & FREEZERS

2 BLAST CHILLERS & SHOCK FREEZERS

3 UNDERCOUNTERS

4 PREP TABLES

5 CHEF BASES

6 COOLERS & WINE CABINET

7 DISPLAY CASES

8 COUNTER TOP DISPLAY CASES

9 SUPERMARKET MULTIDESK MERCHANDISERS

BRANNING BLOOMER	2'-00	LARGE ONE	2'-00
SMALL BLACK	1'-10	LARGE PASTED DANISH	2'-05
SMALL GRANARY	1'-00	LARGE PASTED DANISH	1'-10
SMALL ONE	1'-45	LARGE PASTIC OIB	2'-50
SMALL PASTED DANISH	1'-35	LARGE PIE	1'-55



Pastry display cases Straight glass

VBR AMBAR PR Series

CHARACTERISTICS



Structure

- AISI 304 Stainless steel, including stainless top.
- Heavy duty ball bearing and levelling feet.
- Glass sided panels with thermopane double glass.
- Tilt forward glass opening system.
- Standard decoration: White
- Glass shelves built into silver anodized Aluminum frames.
- Rear sliding doors.
- Built-in thermopane double glass.



Lighting

- LED lighting in canopy and under each glass shelf.



Electrical

- Cord and NEMA 5-20P plug
- Electrical connection is 115V / 1ph / 60Hz.

IDC-VBR12PR

RAL 9017
Black



MOD.



Overall Dimensions

Doors

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	Overall Dimensions	Doors	[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]
IDC-VBR9PR	36-15/16 31-7/8 51-3/16	2	39°F/45°F	10.0	1/2	7.8	540	\$15.104
IDC-VBR12PR	49-3/16 31-7/8 51-3/16	2	39°F/45°F	13.0	3/4	7.9	660	\$17.246
IDC-VBR18PR	73-13/16 31-7/8 51-3/16	3	39°F/45°F	20.0	1	8.8	840	\$21.772



Pastry display cases Straight glass

VBR AMBAR PR Series

CHARACTERISTICS



Refrigeration

- Forced air refrigeration system.
- Case engineered to operate at 75°F and 55% relative humidity.
- This product is designed to operate at the following store condition 75° and 55% R.H
- This display refrigerator is not for the display potentially hazardous foods.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.

IDC-VBR12PR




RAL 5015
Blue 

**EACH SHELF
HOLDS UP TO
45 LBS**


OPTIONAL DECORATION



RAL 9016
White standard 



RAL 9017
Black 



RAL 3001
Red 



RAL 5015
Blue 

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Pastry display cases Straight glass



VBR FG Series



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDesk MERCHANDISERS

**EACH SHELF
HOLDS UP TO
45 LBS**



Pastry display cases Straight glass

VBR FG Series

CHARACTERISTICS



Control

Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.




Leak detection system

All the condensing units are **100% tested, in a Helium chamber** for the detection of gas leakage.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.

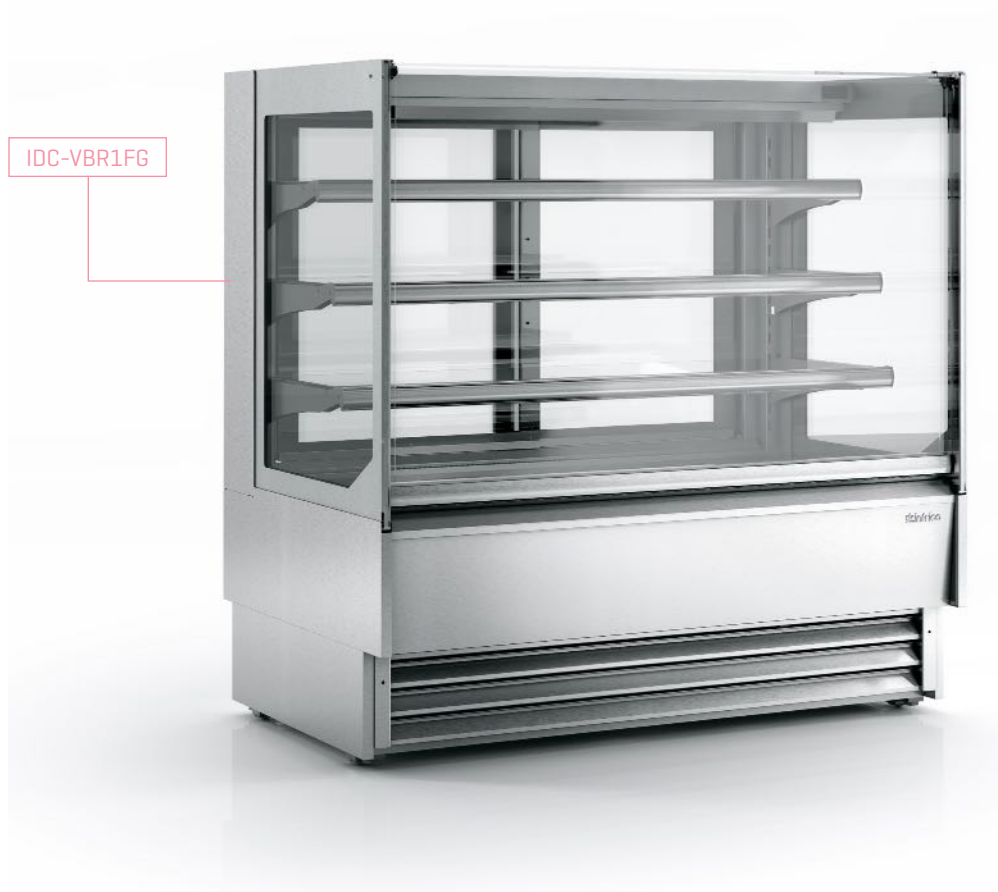

IDC-VBR1FG

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Doors

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

IDC-VBR9FG	36-15/16	31-7/8	51-3/16	2	39°F/45°F	10.0	1/2	7.8	540	\$15.104
IDC-VBR12FG	50-1/2	31-7/8	51-1/8	2	39°F/45°F	13.0	3/4	7.9	660	\$17.246
IDC-VBR18FG	75-5/16	31-7/8	51-3/16	3	39°F/45°F	20.0	1	8.8	840	\$21.772



Pastry display cases Straight glass

VBR FG Series

CHARACTERISTICS



Structure

AISI 304 Series Stainless Steel.
AISI 304 Series Stainless Steel upper worktop.
AISI 304 Series Stainless Steel exposition surface area.
 Tempered **glass** front **hinged.**
Double sliding rear doors.
 Profiles in **anodized aluminium.**



Refrigeration system

Ventilated Condensation system.
Forced air system.
 Temperature and defrost regulated by a **digital controller.**



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared respect** to a traditional lighth bulb.

IDC-VBR12FG



**EACH SHELF
HOLDS UP TO
45 LBS**



ELECTRICAL

115V / 1 ph / 60 Hz.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Pastry display cases Straight glass



Vegetarian MENU

FRESH SALAD

Vegetable salad	€2
Tomato and cucumber salad	€2
Spinach salad	€2
Pumpkin salad	€2
Vegetable salad	€2
Tomato and cucumber salad	€2

CHOICE OF THE DAY

VEGETABLES

Potato	€2
Cauliflower	€2
Carrot	€2

CHOICE OF THE DAY

FRUIT

Orange	€2
Apple	€2
Peach	€2
Cheese	€2
Strawberry	€2
Chocolate	€2

CHOICE OF THE DAY

COMBO Series



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Pastry display cases Straight glass

COMBO Series

CHARACTERISTICS



Control

Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.



Leak detection system

All the condensing units are **100% tested, in a Helium chamber** for the detection of gas leakage.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared respect** to a traditional lighth bulb.

LED lighting in the front.

LED lighting in canopy and under each shelf.



IDC-VC015

Neutral countertop

Black Standard

Available colors



White

MOD.



Overall Dimensions

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

MOD.	→	↗	↑	🌡️	📦	⚙️	⚡	📏	💰
	39-15/16	34-15/16	57-1/8	39°F/45°F	7.09	5/8	7.8	510	\$14.994
IDC-VC09	49-3/16	34-15/16	57-1/8	39°F/45°F	9.46	3/4	8.1	600	\$16.206
IDC-VC012	61-1/2	34-15/16	57-1/8	39°F/45°F	11.79	3/4	10.2	700	\$18.522
IDC-VC015	73-13/16	34-15/16	57-1/8	39°F/45°F	14.16	1	12.7	900	\$20.837

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Pastry display cases Straight glass

COMBO Series

CHARACTERISTICS



Structure

Laminated steel plate.
Exhibition area in **EPOXI**.
Decoration **DM** lacqued.
Hinged front **tempered glass**.
Rear **sliding doors**.
Double lateral **glass** sides.
Dry countertop.
Night curtain.
Enamelled steel base.



Refrigeration system

Rear **electronic thermostat**.
System of **Ventilated Condensation**.
Forced air refrigeration system.
Stainless Steel Evaporative **double trays**. **Digital temperature controller** with automatic defrost system.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** [Quality]; **ISO 14001: 2015** [Environment]; **OSHAS 18001: 2007** [Worker Safety and Health] and by **INTERTEK** in accordance with **UL 471** and **NSF 7**.

Night curtain standard

IDC-VC015



ELECTRICAL

115V / 1 ph / 60 Hz.



Gelato display cases



ARIES Series



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDesk MERCHANDISERS



Gelato display cases Specifications

VAR Series

Gelato forced system



Exterior

- White compac quartz worktop
- Tilt forward frontal tempered glass system
- ABS thermoformed decoration, White standard decoration
- Built-in casters and levelling feet
- Pull down night curtain on the back

Interior

- AISI 304 Stainless steel exhibition area
- LED lighting in the back and front
- Case is compatible with standard 5 Liter Gelato Pans [13-1/8"x6-1/2"x5-7/8"], pans included



Refrigeration

- Digital temperature controller with automatic hot gas defrost system
- Stainless steel evaporative pan
- Forced air refrigeration system
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity
- Hot gas defrost



Electrical

- Cord and NEMA L14-30P plug,
- Electrical connections are 230V [Compressor] and 115V [Digital Control]



Options

- Customizable decoration for lower front and side panels
- Dry case, Please consult with factory for pricing

Ice-cream gravity system



Exterior

- AISI 304 Stainless Steel worktop
- Flat tempered security glass system
- Enamelled steel base
- AISI 304 Stainless Steel lower part decoration
- LED lighting frontal decoration

Interior

- Enameled steel plate
- LED lighting upper profile



Refrigeration

- Digital temperature controller with automatic hot gas defrost system
- Evaporator coil coated with anti-corrosion material 100% polyester
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity



Electrical

- Cord and NEMA 5-15P plug
- Electrical connection is 115V/ 1ph / 60 Hz



Options

- Customizable decoration for lower front and side panels. Please consult with factory for pricing

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Model VAR12HFG



Folding glass cover



Night cover



Combination of trays



Removable evaporation tray-Easy cleaning



LED Technology



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Gelato display cases

Curved glass

CHARACTERISTICS



Control

Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.



Leak detection system

All the condensing units are **100% tested, in a Helium chamber** for the detection of gas leakage.



Lighting

LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared** respect to a traditional light bulb.



Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471** and **NSF 7**.

IDC-VAR18H



RAL 2003
Orange



Important:
Remove gelato product every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.

Lift-up curved glass system supported by hydraulic pistons

OPTIONAL PANEL DECORATION

- RAL 4007 Violet
- RA 2003 Orange
- RAL 5015 Blue
- RAL DESIGN 3504035 Pink
- RAL DESIGN 2108025 Sky blue
- RAL DESIGN 1107060 Pistachio
- RAL 3003 Maroon
- RAL 1018 Yellow
- RAL 9016 White
- RAL 3020 Red
- RAL 1001 Beige
- RAL 6002 Dark Green



IDC-VAR12H

MOD.

-
-
-
-
-
-
-
-
-

	Overall Dimensions			Pans	(°F)	(ft³)	(HP)	115V	220V	[Lbs]	[\$]
IDC-VAR12H	53-3/8	45-1/16	51-9/16	14	-2°F / 5°F	3.45	1-1/4	4.9	5.8	660	\$31.640
IDC-VAR15H	64-5/8	45-1/16	51-9/16	16	-2°F / 5°F	3.95	1+1/2	5.4	6.1	796	\$36.500
IDC-VAR18H	77	45-1/16	51-9/16	20	-2°F / 5°F	4.95	1-1/4 + 3/4	6.5	7.8	940	\$41.025

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Gelato display cases

Flat glass

CHARACTERISTICS



Structure

- White compact quartz worktop
- Tilt forward frontal tempered glass system
- ABS thermoformed decoration, White standard decoration
- Built-in casters and levelling feet
- Pull down night curtain on the back
- AISI 304 Stainless steel exhibition area
- LED lighting in the back and front
- Case is compatible with standard 5 Liter Gelato Pans (13-1/8"x6-1/2"x5-7/8"), pans included



Refrigeration system

- Digital temperature controller with automatic hot gas defrost system
- Stainless steel evaporative pan
- Forced air refrigeration system
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity
- Hot gas defrost

IDC-VAR18HGF



RAL DESIGN 1107060
Pistachio





Popsicle holder [optional]



Important:
Remove gelato product every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.


Pan Dimensions:

-  14-1/4 x 10" Optional
-  14-1/4 x 6-1/2" Standard

Tilt forward frontal tempered glass system



VAR



8 Optional 14 Standard 10 Optional 16 Standard 14 Optional 20 Standard

MOD.



MOD.	Overall Dimensions	Pans	(°F)	(ft³)	(HP)	115V	220V	(lbs)	(\$)
IDC-VAR12HFG	51-1/8 43-7/8 52	14	-2°F / 5°F	3.45	1-1/4	4.9	5.8	765	\$31.640
IDC-VAR15HFG	63-7/8 43-7/8 52	16	-2°F / 5°F	3.95	1+1/2	5.4	6.1	930	\$36.500
IDC-VAR18HFG	76-1/4 43-7/8 52	20	-2°F / 5°F	4.95	1-1/4 + 3/4	6.5	7.8	1022	\$41.025



Ice-cream display case Gravity system



Le sac en papier merci

Ce sac peut contenir
votre attention, votre jean,
vos assiettes, votre cœur,
vos espoirs, vos sautages,
vos fleurs, votre confiance,
votre amitié, votre pyjama,
vos ballerines, vos désirs,
vos idées, vos disques,
vos livres, votre soutien...
Merci.





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDesk MERCHANDISERS



Ice-cream display cases

VBZ IBIZA Series

CHARACTERISTICS



Structure

- White compaq quartz worktop
- Tilt forward frontal tempered glass system
- ABS thermoformed decoration, White standard decoration
- Built-in casters and levelling feet
- Pull down night curtain on the back
- AISI 304 Stainless steel exhibition area
- LED lighting in the back and front
- Case is compatible with standard 5 Liter Gelato Pans (13-1/8"x6-1/2"x5-7/8"), pans included




Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** (Quality); **ISO 14001: 2015** (Environment); **OSHAS 18001: 2007** (Worker Safety and Health) and by **INTERTEK** in accordance with **UL 471 and NSF 7**.




Control


Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.




10 Standard IDC- VBZ15



8 Standard IDC- VBZ12



5 Standard IDC- VBZ15S



4 Standard IDC- VBZ12S

IDC-VBZ15S



Black color optional

OPTIONAL PANEL DECORATION

RAL 4007
Violet

RA 2003
Orange

RAL 5015
Blue

RAL DESIGN
3504035
Pink

RAL DESIGN
2108025
Sky blue

RAL DESIGN
1107060
Pistachio

RAL 3003
Maroon

RAL 1018
Yellow

RAL 9016
White

RAL 3020
Red

RAL 1001
Beige

RAL 6002
Dark Green

MOD.



Overall Dimensions

Sides

Pans

(°F)

(ft³)

(HP)

115V

(Lbs)

(\$)

Model	Overall Dimensions	Sides	Pans	(°F)	(ft³)	(HP)	115V	(Lbs)	(\$)		
IDC- VBZ12S	49-11/16	26-1/4	47-13/16	1-3/16 + 1-3/16	7 + 7	2°F / 6°F	7.41	1/3	6.9	415	\$10.119
IDC- VBZ15S	63-7/8	26-3/8	47-13/16	1-3/16 + 1-3/16	9 + 9	2°F / 6°F	9.28	1/3	7.4	775	\$10.973
IDC- VBZ12	49-3/16	36-7/32	53-5/32	1-3/16 + 1-3/16	20	2°F / 6°F	10	3/8	4.9	560	\$13.103
IDC- VBZ15	61-1/2	36-7/32	53-5/32	1-3/16 + 1-3/16	26	2°F / 6°F	13	3/8	5.4	615	\$14.091

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



AUTODESK
REVIT



Ice-cream Gravity System

VBZ IBIZA Series

CHARACTERISTICS




Refrigeration

- Digital temperature controller with automatic hot gas defrost system
- Evaporator coil coated with anti-corrosion material 100% polyester
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity




Lighting


LED lighting incorporated, **reducing energy** energetic consumption **between 80% and 90% compared respect** to a traditional lighth bulb.




13 Optional IDC- VBZ15




10 Optional IDC- VBZ12



9 Optional IDC- VBZ15S



7 Optional IDC- VBZ12S



White color standard

OPTIONAL PANEL DECORATION

RAL 4007
Violet



RA 2003
Orange



RAL 5015
Blue



RAL DESIGN
3504035
Pink



RAL DESIGN
2108025
Sky blue



RAL DESIGN
1107060
Pistachio



RAL 3003
Maroon



RAL 1018
Yellow



RAL 9016
White



RAL 3020
Red



RAL 1001
Beige



RAL 6002
Dark Green



ELECTRICAL

Cord and NEMA 5- 15 plug
115V / 1 ph / 60 Hz.

8.COUNTER TOP DISPLAY CASES





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS

8. Counter top display cases



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Index

Refrigerated Ingredient cases

Models	Description	Page
ICT-VIP1330B1/3GLASSTOP	Pizza ingredient displays - 4 pans - Glass	168
ICT-VIP1490B1/3GLASSTOP	Pizza ingredient displays - 5 pans - Glass	168
ICT-VIP1740B1/3GLASSTOP	Pizza ingredient displays - 6 pans - Glass	168
ICT-VIP1980B1/3GLASSTOP	Pizza ingredient displays - 8 pans - Glass	168
ICT-VIP2300B1/3GLASSTOP	Pizza ingredient displays - 10 pans - Glass	168
ICT-VIP1330B1/3SOLIDLID	Pizza ingredient displays - 4 pans - Solid Lid	169
ICT-VIP1490B1/3SOLIDLID	Pizza ingredient displays - 5 pans - Solid Lid	169
ICT-VIP1740B1/3SOLIDLID	Pizza ingredient displays - 6 pans - Solid Lid	169
ICT-VIP1980B1/3SOLIDLID	Pizza ingredient displays - 8 pans - Solid Lid	169
ICT-VIP2300B1/3SOLIDLID	Pizza ingredient displays - 10 pans - Solid Lid	169



Sushi cases

Models	Description	Page
ICT-VSU50L	Left side condensing unit - Width 50"	170
ICT-VSU63L	Left side condensing unit - Width 63-3/4"	170
ICT-VSU77L	Left side condensing unit - Width 77-5/8"	170
ICT-VSU50R	Right side condensing unit - Width 50"	171
ICT-VSU63R	Right side condensing unit - Width 63-3/4"	171
ICT-VSU77R	Right side condensing unit - Width 77-5/8"	171





Wakil Sushi Wine List

Sparkling Wine

Charles Heidsieck Reims, France 2008 \$120

Charles Heidsieck Reims, France 2009 \$120

Charles Heidsieck Reims, France 2010 \$120

White Wine

Charles Heidsieck Reims, France 2008 \$120

Charles Heidsieck Reims, France 2009 \$120

Charles Heidsieck Reims, France 2010 \$120

Charles Heidsieck Reims, France 2011 \$120

Charles Heidsieck Reims, France 2012 \$120

Charles Heidsieck Reims, France 2013 \$120

Charles Heidsieck Reims, France 2014 \$120

Charles Heidsieck Reims, France 2015 \$120

Charles Heidsieck Reims, France 2016 \$120

Charles Heidsieck Reims, France 2017 \$120

Charles Heidsieck Reims, France 2018 \$120

Charles Heidsieck Reims, France 2019 \$120

Charles Heidsieck Reims, France 2020 \$120

Charles Heidsieck Reims, France 2021 \$120

Charles Heidsieck Reims, France 2022 \$120



1 REACH-IN REFRIGERATORS & FREEZERS

2 BLAST CHILLERS & SHOCK FREEZERS

3 UNDERCOUNTERS

4 PREP TABLES

5 CHEF BASES

6 COOLERS & WINE CABINET

7 DISPLAY CASES

8 COUNTER TOP DISPLAY CASES

9 SUPERMARKET MULTIDESK MERCHANDISERS



Counter top display cases Specifications

Counter top ingredient cases



Exterior

- Aisi 304 stainless steel
- Safety glass on the top, closed in the front [facing the customer] and open in the back facing the operator]
- Sliding doors on the back
- Levelling feet

Interior

- Aisi 304 stainless steel
- Stainless steel 6" deep pans, included

Insulation

- Cfc-free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low gwp & zero odp effect



Refrigeration

- Digital temperature controller with automatic defrost system
- Cold wall refrigeration system
- Refrigerant gas R600A



Electrical

- Cord and nema 5-15p plug
- Electrical connection is 115v / 1ph / 60hz

Counter top sushi display cases



Exterior

- Aisi 304 stainless steel
- Rear sliding doors, included
- Anodized aluminum silver profile
- Levelling feet

Interior

- Aisi 304 stainless steel
- Internal drain plug for easy cleaning
- Led lighting in top profile

Insulation

- Cfc-free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low gwp & zero odp effect

Refrigeration

- Digital temperature controller
- Manual defrost system
- Gravity coil on top and cold plate refrigeration system on the bottom
- Refrigerant gas R134A



Electrical

- Cord and nema 5-15p plug
- Electrical connection is 115v / 1ph / 60hz

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Model VIP1740 Glass top



**3 YEAR
WARRANTY**

Parts & Labor - 6 YEAR COMPRESSOR



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Countertop display cases Refrigerated glass top

VIP Series

CHARACTERISTICS



Structure

- Aisi 304 stainless steel
- Safety glass on the top, closed in the front (facing the customer) and open in the back facing the operator)
- Sliding doors on the back
- Levelling feet
- Aisi 304 stainless steel
- Stainless steel 6" deep pans, included



Electrical

- Cord and nema 5-15p plug
- Electrical connection is 115v / 1ph / 60hz



ICT-VIP1490B1/3GLASSTOP

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

Pans

(°F)

(ft³)

(HP)

115V

[Lbs]

[\$]

MOD.	Overall Dimensions	Pans	(°F)	(ft ³)	(HP)	115V	[Lbs]	[\$]		
ICT-VIP1330B1/3GLASSTOP	52-5/16	16-5/16	17-11/16	4	39°F/41°F	1.30	1/6	1.82	142	\$5.940
ICT-VIP1490B1/3GLASSTOP	58-3/4	16-5/16	17-11/16	5	39°F/41°F	1.55	1/6	1.82	160	\$6.512
ICT-VIP1704B1/3GLASSTOP	68-1/4	16-5/16	17-11/16	6	39°F/41°F	1.83	1/6	1.82	165	\$7.453
ICT-VIP1980B1/3GLASSTOP	77-13/16	16-5/16	17-11/16	8	39°F/41°F	2.36	1/6	1.82	190	\$7.975
ICT-VIP2300B1/3GLASSTOP	90-1/2	16-1/4	17-3/4	10	39°F/41°F	2.86	1/6	1.82	174	\$8.325



Countertop display cases Refrigerated solid lid

VIP Series

CHARACTERISTICS



Refrigeration

Cold board refrigeration system on the bottom.
incorporated refrigerating unit.
manual defrost.




ICT-VIP1980B1/3SOLIDLID

VIP 1330 B 1/3 [501X13] = 1 [501X11] = 3



VIP 1740 B 1/3 [501X13] = 1 [501X11] = 5



VIP 1490 B 1/3 [501X13] = 1 [501X11] = 4



VIP 1980 B 1/3 [501X11] = 8



MOD.



	Overall Dimensions			Pans	(°F)	(ft ³)	(HP)	115V	[Lbs]	(\$)
ICT-VIP1330B1/3SOLIDLID	52-5/16	16-5/16	10-1/4	4	39°F/41°F	1.30	1/6	1.82	115	\$5,242
ICT-VIP1490B1/3SOLIDLID	58-3/4	16-5/16	10-1/4	5	39°F/41°F	1.55	1/6	1.82	131	\$5,803
ICT-ICT-VIP1740B1/3SOLIDLID	68-1/4	16-5/16	10-1/4	6	39°F/41°F	1.83	1/6	1.82	140	\$6,562
ICT-VIP1980B1/3SOLIDLID	77-13/16	16-5/16	10-1/4	8	39°F/41°F	2.36	1/6	1.82	160	\$7,315
ICT-VIP2300B1/3SOLIDLID	90-1/2	16-1/4	10-1/4	10	39°F/41°F	2.86	1/6	1.82	174	\$7,300

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Countertop - Sushi cases Left side condensing unit

VSU Series

CHARACTERISTICS



Cleaning

Coolers have inner **joints with curve edges (wide radiuses for easy cleaning).**




Doors

Suspended **sliding rear door.**

ICT-VSU50L



ICT-VSU63L

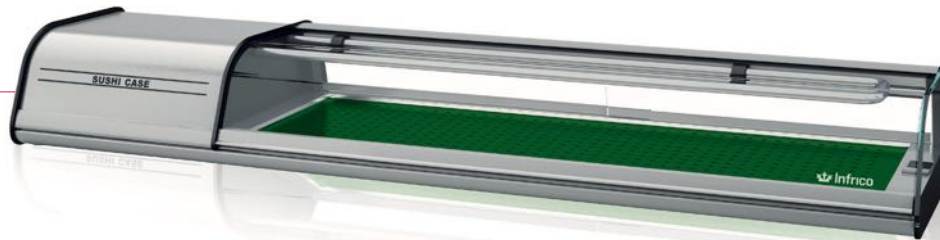

ICT-VSU77L



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



Overall Dimensions

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	→	↗	↑	🌡️	📦	⚙️	⚡	📏	💰
	Overall Dimensions			[°F]	[ft ³]	[HP]	115V	[Lbs]	[\$]
ICT-VSU50L	50-1/4	16-1/8	9-1/8	30°F/34°F	.56	1/8	3.2	115	\$4,575
ICT-VSU63L	64-1/16	16-1/8	9-1/8	30°F/34°F	.84	1/8	3.4	139	\$5,150
ICT-VSU77L	77-15/16	16-1/8	9-1/8	30°F/34°F	1.14	1/8	3.8	180	\$5,720



Countertop - Sushi cases

Right side condensing unit

VSU Series

CHARACTERISTICS



Structure

Exterior profile decoration of **silver anodized aluminium**.
Front opening curved tempered security glass system.
Independent exhibition of the group.
 Interior **drain**.



Refrigeration


Ventilated condensation system.
Cold plate evaporation system + Upper tube by gravity.
Evaporation coil upper in the chamber.




3 YEAR WARRANTY

Parts & Labor - 6 YEAR COMPRESSOR

ICT-VSU63R

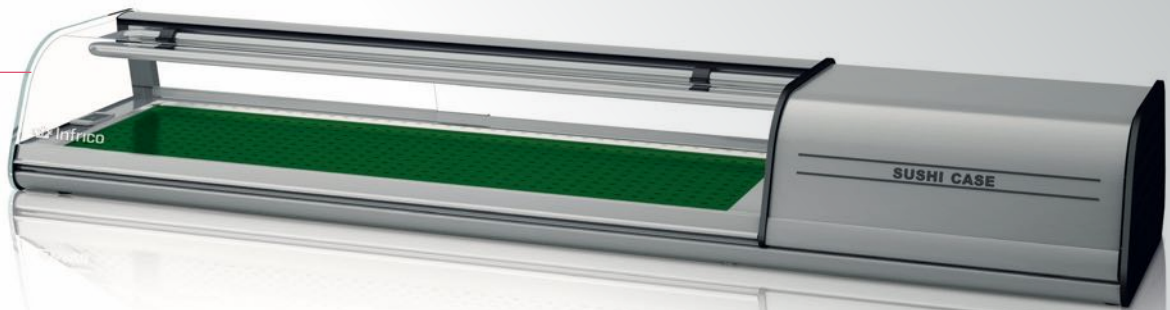

ICT-VSU77R

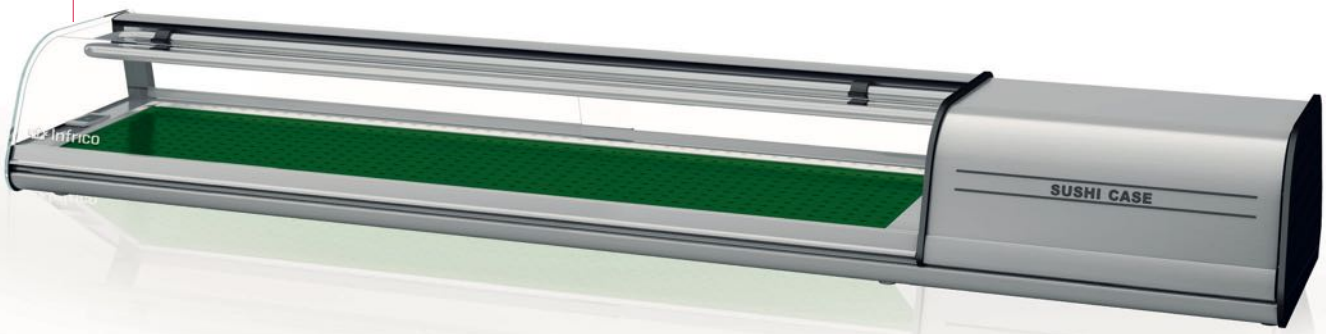

MOD.



Overall Dimensions

[°F]

[ft³]

[HP]

115V

[Lbs]

[\$]

MOD.	→	↗	↑	🌡️	📦	🌀	⚡	🏷️	💰
	Overall Dimensions			[°F]	[ft³]	[HP]	115V	[Lbs]	[\$]
ICT-VSU50R	50-1/4	16-1/8	9-1/8	30°F/34°F	.56	1/8	3.2	115	\$4,575
ICT-VSU63R	64-1/16	16-1/8	9-1/8	30°F/34°F	.84	1/8	3.4	139	\$5,150
ICT-VSU77R	77-15/16	16-1/8	9-1/8	30°F/34°F	1.14	1/8	3.8	180	\$5,720

Important: ONLY place refrigerated product! For daily cleaning, remove product and disconnect unit.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDISK MERCHANDISERS

9. SUPERMARKET MULTIDESK MERCHANDISERS





REACH-IN REFRIGERATORS & FREEZERS	1
BLAST CHILLERS & SHOCK FREEZERS	2
UNDERCOUNTERS	3
PREP TABLES	4
CHEF BASES	5
COOLERS & WINE CABINET	6
DISPLAY CASES	7
COUNTER TOP DISPLAY CASES	8
SUPERMARKET MULTIDESK MERCHANDISERS	9

9. Supermarket multideck merchandisers

Index

Air curtains Supermarket



Models	Description	Page
IAG-SML9CM2	Air curtains semi vertical	179
IAG-SML12CM2	Air curtains semi vertical	179
IAG-SML18CM2	Air curtains semi vertical	179

Medium temp Multideck



Models	Description	Page
IAG-ML9DCCM1	Reach-in Merchandisers	180
IAG-ML12DCCM1	Reach-in Merchandisers	180
IAG-ML18DCCM1	Reach-in Merchandisers	180
IAG-ML9CM1	Grab and Go Merchandisers	181
IAG-ML12CM1	Grab and Go Merchandisers	181
IAG-ML18CM1	Grab and Go Merchandisers	181

Medium temp Stainless steel multideck


















Models	Description	Page
IAG-ML 9DCIM1	Reach-in Merchandisers	182
IAG-ML 12DCIM1	Reach-in Merchandisers	182
IAG-ML 18DCIM1	Reach-in Merchandisers	182
IAG-ML 9IM1	Grab and Go Merchandisers	183
IAG-ML 12IM1	Grab and Go Merchandisers	183
IAG-ML 18IM1	Grab and Go Merchandisers	183

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Colors CHART

1 REACH-IN REFRIGERATORS & FREEZERS
 2 BLAST CHILLERS & SHOCK FREEZERS
 3 UNDERCOUNTERS
 4 PREP TABLES
 5 CHEF BASES
 6 COOLERS & WINE CABINET
 7 DISPLAY CASES
 8 COUNTER TOP DISPLAY CASES
 9 SUPERMARKET MULTIDesk MERCHANDISERS

Interior Color

 Ral 1015 Beige	 Ral 1018 Yellow	 Ral 2003 Orange	 Ral 3003 Maroon	 Ral 3020 Red
 Ral 5015 Blue	 Ral 5017 Dark blue	 Ral 5011 Steel blue	 Ral 6002 Dark Green	 Ral 6018 Green
 Ral 6019 Pastel Green	 Ral 7016 Anthracite	 Ral 7035 Light gray	 Ral 7037 Dusty gray	 Ral 7042 Traffic gray
 White	 Black	 Stainless Steel		

Exterior Color

 White	 Black	 Stainless Steel
-------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------

Examples





ETL LISTED TO UL471 standard and is certified to NSF / ISO 22000. We reserve the right to change specifications without prior notice. Non contractual pictures

176



- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Air curtains Specifications

Vertical & glass sided / Air curtains semi vertical glass sided



Exterior

- Pull down night curtain
- Black prepainted steel cabinet standard
- Glass sided panels
- Heavy duty ball transfer and levelling feet
- Aisi 304 stainless steel (inox) *only Air curtains semi vertical glass sided*

Interior

- Led lighting in canopy and under each shelf
- Black prepainted steel cabinet standard.
- Aisi 304 stainless steel (inox) *only Air curtains semi vertical glass sided*

Shelving

- (4) Four rows of adjustable shelves
- Price channels included



Refrigeration

- Digital temperature controller with automatic defrost system
- Double stainless steel evaporative pan system, first, by hot gas, second, by electrical resistance
- Extractable condensing unit for easy service
- Forced refrigeration system
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity



Electrical

- 220V /1PH/60HZ/L14-30P Plug (Open merchandiser).
- 115v /1PH/60HZ/ 5-15/5-20P Plug (Glass door merchandiser).

Air curtains stainless steel



Exterior

- Aisi 304 stainless steel
- Pull down night curtain
- Glass sided panels
- Heavy duty ball transfer and levelling feet

Interior

- Aisi 304 stainless steel
- Stainless steel internal panel perforated
- Led lighting in canopy and under each shelf

Shelving

- (4) Four rows of adjustable shelves
- Price channels included



Refrigeration

- Digital temperature controller with automatic defrost system
- Double stainless steel evaporative pan system, first, by hot gas, second, by electrical resistance
- Extractable condensing unit for easy service
- Forced refrigeration system
- Refrigerant gas R404A
- Case engineered to operate at 75°F and 55% relative humidity



Electrical

- 220V /1PH/60HZ/L14-30P Plug (Open merchandiser).
- 115v /1PH/60HZ/ 5-15/5-20P Plug (Glass door merchandiser).

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



Low profile Air curtains

SML | SMDG
Series

CHARACTERISTICS



Benefits

- Plug in propane open lowmultideck.
- Maximum product visibility.
- Display end panels.
- Standard perspex display front to optimize energy savings.
- Canopy LED lighting.









4 exposure levels:

- 3 shelves
- Exposition deck
- Tiltable adjustable shelves.
- Price-holder 40 mm on shelves and exposition deck.
- Electronic control.



IAG-SML18CM2

MOD.

								
	Overall Dimensions			[°F]	[ft ³]	[ft ²]	Shelves	[\$]
IAG-SML9CM2	40	34-5/6	59-1/6	35.6°F/39,2°F	6-1/3	9-1/3	3	\$12.100
IAG-SML12CM2	52-1/3	34-5/6	59-1/6	35.6°F/39,2°F	8-1/2	12-1/2	3	\$14.080
IAG-SML18CM2	77	34-5/6	59-1/6	35.6°F/39,2°F	12-5/6	18-5/6	3	\$16.500

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS



Medium temp multideck Reach in merchandisers

**SELF-CONTAINED
GLASS DOOR
MDCC | MLDCM1**
Series

CHARACTERISTICS



Benefits

Self Contained vertical refrigeration cabinet with hinged double pane glass doors. Reinforced low emissive glass.

Electronic control.

LED lighting 4000k color in canopy.

5 display levels:

- ✦ 4 shelves
- ✦ Expositon deck

Tilttable adjustable shelves with price tag-holder.

Display end panels.

IAG-ML12DCCM1



DOE

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.



	Overall Dimensions	[°F]	[ft ³]	Doors	Shelves	[HP]	115V	230V	[Lbs]	[\$]		
IAG-ML9DCCM1	40	34-5/6	78-3/4	33°F/41°F	15	2	4	5/8	10.4	-	485	\$16.068
IAG-ML12DCCM1	52-1/3	34-5/6	78-3/4	33°F/41°F	26	2	4	5/8	11.3	-	697	\$19.158
IAG-ML18DCCM1	77	34-5/6	78-3/4	33°F/41°F	40	3	4	1	17.4	-	908	\$22.866

Medium temp multideck grab & go merchandisers

SELF-CONTAINED M | MSCM1 Series

CHARACTERISTICS



Benefits

Plug in vertical refrigeration cabinet with hinged double glass doors without screen pinting. Toughened low E glasses.

Electronic control.
LED lighting 4000k color in canopy.

5 display levels:

- ✦ 4 shelves
- ✦ Expositon deck

Tilttable adjustable shelves with price tag-holder.
Display end panels.

IAG-ML12CM1



MOD.



Overall Dimensions

(°F)

(ft³)

(HP)

115V 220V

[Lbs]

[\$]

MOD.	→	↗	↑	°F	ft³	HP	115V	220V	Lbs	\$
IAG-ML9CM1	40	34-5/6	78-3/4	33°F/41°F	15	1	17.9	-	397	\$14.162
IAG-ML12CM1	52-1/3	34-5/6	78-3/4	33°F/41°F	25	1-1/4	2	9.2	591	\$16.882
IAG-ML18CM1	77	34-5/6	78-3/4	33°F/41°F	40	1-1/2	3.2	13	710	\$20.055

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDECK MERCHANDISERS



Medium temp stainless steel multideck Reach-in merchandisers

**GLASS DOOR
MDCC | MLDCM1**
Series

CHARACTERISTICS



Benefits

Self Contained vertical refrigeration cabinet with hinged double pane glass doors. Reinforced low emissive glass.

Electronic control.

LED lighting 4000k color in canopy.

5 display levels:

- ✦ 4 shelves
- ✦ Expositor deck

Tiltable adjustable shelves with price tag-holder.

Display end panels.



IAG-ML12DCIM1

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

MOD.

	Overall Dimensions			[°F]	[ft ³]	Doors	Shelves	[HP]	115V	230V	[Lbs]	[\$]

IAG-ML9DCIM1	40	34-5/6	78-3/4	33°F/41°F	15	2	4	5/8	10.4	-	485	\$17,510
IAG-ML12DCIM1	52-1/3	34-5/6	78-3/4	33°F/41°F	26	2	4	5/8	11.3	-	697	\$20,085
IAG-ML18DCIM1	77	34-5/6	78-3/4	33°F/41°F	40	3	4	1	17.4	-	908	\$24,514

Medium temp stainless steel multideck grab & go merchandisers

CHARACTERISTICS



Benefits

Plug in vertical refrigeration cabinet with hinged double glass doors without screen pinting. Toughened low E glasses.

Electronic control.
LED lighting 4000k color in canopy.

5 display levels:

- ✦ 4 shelves
- ✦ Expositon deck

Tilttable adjustable shelves with price tag-holder.
Display end panels.

IAG-ML12DIM1



MOD.



Overall Dimensions

(°F)

(ft³)

(HP)

115V

220V

[Lbs]

[\$]

MOD.	→	↗	↑	🌡️	📦	⚙️	⚠️	🏷️	💰	
	Overall Dimensions			(°F)	(ft³)	(HP)	115V	220V	[Lbs]	[\$]
IAG-ML9IM1	40	34-5/6	78-3/4	33°F/41°F	15	1	17.9	-	397	\$15.736
IAG-ML12IM1	52-1/3	34-5/6	78-3/4	33°F/41°F	25	1-1/4	2	9.2	591	\$18.926
IAG-ML18IM1	77	34-5/6	78-3/4	33°F/41°F	40	1-1/2	3.2	13	710	\$21.089

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures





WE MAKE
SHOPPING
easier

Visit our website for more information
about our Supermarket line.

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDesk MERCHANDISERS





- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDesk MERCHANDISERS



Accessories & parts

For a full list and pricing of O.E.M Parts & Accesories, please go to AutoQuotes





Quick reference guide

INFRICO USA

MOD	PAG
IRR-AGB23	20-21
IRR-AGB49	20-21
IRR-AGB23BT	22-23
IRR-AGB49BT	22-23
IRR-AGB23CR	24-25
IRR-AGB49CR	24-25
IRR-AGB45RI	26-27
IRR-AGB96RI	26-27
IRRR-AGB45RT	26-27
IRR-AGB45RIBT	26-27
IRR-AGB96RIBT	26-27
IRR-AN23	28-29
IRR-AN49	28-29
IRR-AN67	28-29
IRR-AN23BT	30-31
IRR-AN49BT	30-31
IRR-AN67BT	30-31
IRR-AN49MX	30-31
IRR-AN23CR	32-33
IRR-AN49CR	32-33
IRR-AN67CR	32-33
IRR-AN23BTCR	34-35
IRR-AN49BTCR	34-35
IRR-AGN300CR	36-37
IRR-AGN301	36-37
IRR-AGN301BT	36-37
IRR-AGN600CR	36-37
IRR-AGN602	36-37
IRR-AGN602BT	36-37
IRR-AGN602MX	36-37

MOD	PAG
IBC-ABT3 1S	50-51
IBC-ABT5 1L	50-51
IBC-ABT7 1M	50-51
IBC-ABT7 1L	50-51
IBC-ABT10 1L	52-53
IBC-ABT14 1L	52-53
IBC-ABT20 1CBI	54-55
IBC-ABT20 2CBI	54-55
IBC-ABT20 1C	54-55
IBC-ABT20 2C	54-55
ICB-ABT20 1P	54-55
IBC-ABT20 2P	54-55
IUC-UC27R	64-65
IUC-UC48R	64-65
IUC-UC60R	64-65
IUC-UC72R	64-65
IUC-UC27F	66-67
IUC-UC48F	66-67
IUC-UC60F	66-67
IUC-MR41	68-69
IUC-MR67	68-69
IUC-MR93	68-69
IUC-MR41BT	70-71
IUC-MR67BT	70-71

MOD	PAG
IRT-UC27P	80-81
IRT-UC48P	80-81
IRT-UC60P	80-81
IRT-UC72P	80-81
IRT-UC27PMT	82-83
IRT-UC48PMT	82-83
IRT-UC60PMT	82-83
IRT-UC72PMT	82-83
IRT-MR41EN	84-85
IRT-MR67EN	84-85
IRT-MR93EN	84-85
IRT-MR119EN	84-85
IRT-MR67-GT COMBO	86-87
IRT-MR93-GT COMBO	86-87
IRT-MPG1490 COMBO	86-87
IRT-MPG1980 COMBO	86-87
IUC-MSG-36	96-97
IUC-MSG-48	96-97
IUC-MSG-52	96-97
IUC-MSG52-60	96-97
IUC-MSG-72	96-97
IUC-MSG-96	96-97
IUC-MSG-110	96-97

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Quick reference guide

INFRICO USA

MOD	PAG
IMD-ERV36IIGD	106-107
IMD-ERV60IIGD	106-107
IMD-ERV84IIGD	106-107
IMD-ERV36IISD	108-109
IMD-ERV60IISD	108-109
IMD-ERV84IISD	108-109
IMD-ERV15IIGD	110-111
IMD-ERV25IIGD	110-111
IMD-ERV35IIGD	110-111
IMD-ERV15GD	112-113
IMD-ERV25GD	112-113
IMD-ERV35GD	112-113
IMD-ERV15SD	114-115
IMD-ERV25SD	114-115
IMD-ERV35SD	114-115
IMD-ERC 100	116-117
IMD-ERC 130	116-117
IMD-ERC 200	116-117
IMD-NEC 501 RV	118-119
IMD-NEC 501 FV	118-119
IMD-ERC 130 PH	118-119
IMD-ERC 200 PH	118-119
IMD-ERC 130 PHBT	118-119
IMD-ERC 200 PHBT	118-119
IMD-EVV100	122
IMD-EVV200MX	122
IMD-EVV23R1G	123
IMD-EVV49R2G	123

MOD	PAG
IDC-VBC 9 RCP / SCP	130-131
IDC-VBC 12 RCP / SCP	130-131
IDC-VBC 15 RCP / SCP	130-131
IDC-VBC 18 RCP / SCP	130-131
IDC-VBC 25 RCP / SCP	130-131
IDC-VBC90AA RCP / SCP	130-131
IDC-VRP 13	132-133
IDC-VML 12	132-133
IDC-VML 15	132-133
IDC-VML 18	132-133
IDC-VBR 9R	136
IDC-VBR 12R	136
IDC-VBR 18R	136
IDC-VBR 9SS	137
IDC-VBR 12SS	137
IDC-VBR 18SS	137
IDC-VBR 9PR	140-141
IDC-VBR 12PR	140-141
IDC-VBR 18PR	140-141
IDC-VBR 9FG	144-145
IDC-VBR 12FG	144-145
IDC-VBR 18FG	144-145
IDC-VCO 9	148-149
IDC-VCO 12	148-149
IDC-VCO 15	148-149
IDC-VCO 18	148-149
IDC-VAR 12H	154
IDC-VAR 15H	154
IDC-VAR 18H	154
IDC-VAR 12HFG	155
IDC-VAR 15HFG	155
IDC-VAR 18HFG	155
IDC-VBZ 12S	158-159
IDC-VBZ 15S	158-159
IDC-VBZ 12	158-159
IDC-VBZ 15	158-159

MOD	PAG
ICT-VIP1330B1/3GLASSTOP	168
ICT-VIP1490B1/3GLASSTOP	168
ICT-VIP1704B1/3GLASSTOP	168
ICT-VIP1980B1/3GLASSTOP	168
ICT-VIP2300B1/3GLASSTOP	168
ICT-VIP1330B1/3SOLIDLID	169
ICT-VIP1490B1/3SOLIDLID	169
ICT-VIP1740B1/3SOLIDLID	169
ICT-VIP1980B1/3SOLIDLID	169
ICT-VIP2300B1/3SOLIDLID	169
ICT-VSU50L	170
ICT-VSU63L	170
ICT-VSU77L	170
ICT-VSU50R	171
ICT-VSU63R	171
ICT-VSU77R	171

IAG-SML9CM2	179
IAG-SML12CM2	179
IAG-SML18CM2	179
IAG-ML9DCCM1	180
IAG-ML12DCCM1	180
IAG-ML18DCCM1	180
IAG-ML9CM1	181
IAG-ML12CM1	181
IAG-ML18CM1	181
IAG-ML9DCIM1	182
IAG-ML12DCIM1	182
IAG-ML18DCIM1	182
IAG-ML9IM1	183
IAG-ML12IM1	183
IAG-ML18IM1	183

- 1 REACH-IN REFRIGERATORS & FREEZERS
- 2 BLAST CHILLERS & SHOCK FREEZERS
- 3 UNDERCOUNTERS
- 4 PREP TABLES
- 5 CHEF BASES
- 6 COOLERS & WINE CABINET
- 7 DISPLAY CASES
- 8 COUNTER TOP DISPLAY CASES
- 9 SUPERMARKET MULTIDESK MERCHANDISERS




Customer Service



FOR ORIGINAL FACTORY
PARTS & AUTHORIZED
SERVICE: 1-855-340-4637

Our technical and customer service team is focused on providing you with the care, knowledge and support you will need with the repair and delivery of spare parts.

www.infrico.us

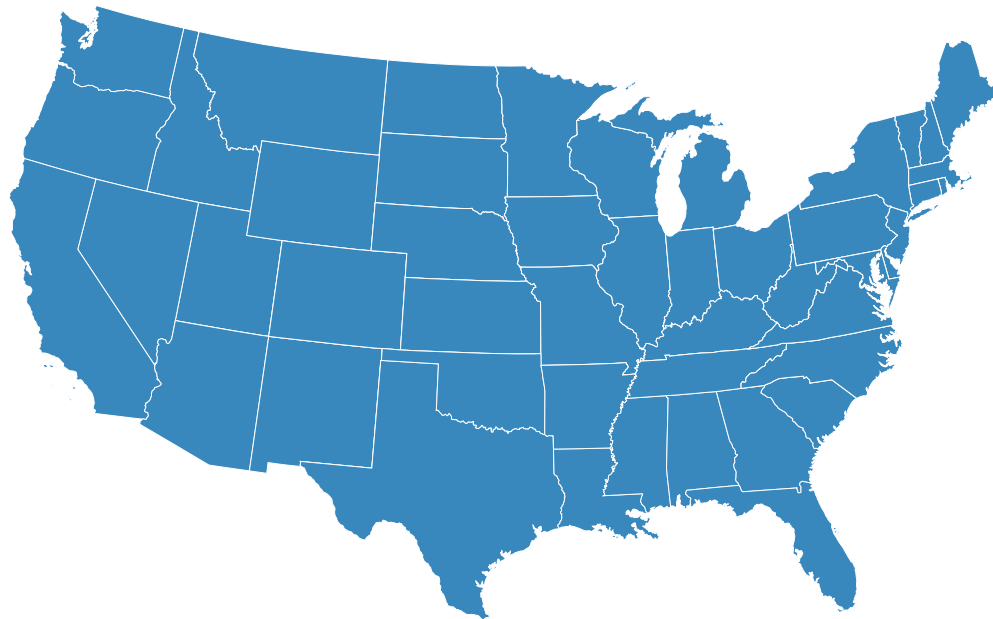

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures



AUTODESK
REVIT



DOE F-GAS

Infrico USA Limited warranty

2022 INFRICO USA LIMITED WARRANTY INFRICO USA

[further on stated as "INFRICO"] warrants to the original purchaser of every new INFRICO refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specific by INFRICO and upon proper installation and start-up in accordance with the instruction packet supplied with each INFRICO unit. INFRICO's obligation under this warranty is limited to the following conditions upon each date of invoice:

PartsTwo (2) years
Labor Two (2) years
CompressorSix (6) years

All parts covered under this specific above stated warranty that are determined as failures by INFRICO, are limited to the repair or replacement, including labor charges of defective parts or assemblies.

WARRANTY CLAIM PROCEDURE

All claims for labor or parts must be made directly through INFRICO. All claims should include model number of the unit, the serial number of the cabinet, proof of purchase, and all pertinent information supporting the existence of the alleged defect. Warranty starts the day of shipment.

Based on the reported case, INFRICO will program the service attention either by sending an authorized technician to the place indicated by the Customer in order to solve the situation or will send the necessary spare parts for its repair.

This contract does not apply outside the limits of the USA and CANADA. Nor does it apply to any part which has been subject to misuse, neglect, alteration, accident or to any damage caused by transportation, flood, fire, or the acts of God. This contract is not effective unless the INFRICO Warranty Claim Card, furnished to the distributor, is properly filled out and mailed to service@infrico.com within 24 HOURS from the date of delivery. The term "Original Purchaser" as used herein shall be deemed to refer to that person, firm, association, or company for whom the refrigeration unit refers to herein is originally installed.

WHAT IS NOT COVERED BY THIS WARRANTY

INFRICO's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty.

No consequential damages:

INFRICO is not responsible for economic loss; profit loss or special indirect or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account of refrigeration failure.

Warranty is not transferable:

This warranty is not assignable and applies only in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose.

Improper use:

INFRICO assumes no liability for parts or labor coverage for component failure or other damages resulting from improper usage or installation or failure to clean and/or maintain product as set forth in the warranty packet provided with the unit.

Alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, acts of God:

INFRICO is not responsible for the repair or replacement of any parts that INFRICO determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, act of God or improper electrical connections. INFRICO is not responsible for the repair or replacement of failed or damaged components resulting from electrical power failure, the use of extension cords, low voltage, or voltage drops to the unit.

No implied warranty of merchantability or fitness for a particular purpose:

There aren't any other warranties expressed, implied or statutory, except the warranties as described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.

Outside USA & CANADA:

This warranty does not apply to, and INFRICO is not responsible for, any warranty claims made on products sold or used outside the United States of America and Canada.



Tradeshows & exhibitions



host | **Milano**
MILANO- ITALY 2021



SIRH/+
LYON
LYON- FRANCE 2021

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice. Non contractual pictures

Tradeshows & exhibitions



Infrico participates in the most prestigious foodservice tradeshows around the world, where we display our new state-of-the-art technology and products.



DEPARTMENTS

VP of Sales & Marketing

GigiDyola@infrico.com
305-777-9599 x700

National service department

Service@infrico.com
305-777-9599 x701
305-399-9472 Cell

Parts & logistics department

Logistics@infrico.com
305-777-9599 x704

Customer service support

Customerservice@infrico.com
305-777-9599 x702

NORTH AMERICA CORPORATE DIVISION

1409 NW 84th Avenue
Doral, FL 33126
USA



Infra

Infra





USA



NORTH AMERICA
CORPORATE DIVISION

**1409 NW 84th Avenue,
Doral FL 33126**

infrico.us