



**John
BOOS**
Since 1887

ITEM #: _____ QTY: _____
 MODEL #: _____
 PROJECT NAME: _____

073118

3601 S. Banker St. Effingham, IL 62401 • P.O. BOX 609 • Ph: (888) 431-2667 • Fax: (800) 433-2667

"SDT-S" SOILED STRAIGHT DISHTABLES PRO-BOWL



FEATURES:

- TYPE 300 STAINLESS STEEL WITH # 4 POLISH, SATIN FINISH
- 8" DEEP BOWLS
- BOTTOM OF BOWLS FORMED FOR DRAINAGE TO 3-1/2" DIAMETER, DIE STAMPED OPENING
- FULL LENGTH **10" HIGH BOXED BACKSPLASH**, WITH 2" RETURN TO WALL AT 45 DEGREE AND 1" TURNED DOWN REAR LIP
- 1" FAUCET HOLES IN BACKSPLASH
- ALL OUTSIDE CORNERS OF ASSEMBLY ARE BULLNOSED TO PROVIDE SAFE, CLEAN, AND POLISHED EDGE
- STANDARD 1-5/8" DIAMETER LEGS



CONSTRUCTION:

- TOP: STAINLESS STEEL TOPS ARE TIG WELDED, EXPOSED WELDS ARE POLISHED TO MATCH ADJACENT SURFACE.

MATERIAL:


- TOP: STAINLESS STEEL TYPE 300 STAINLESS STEEL WITH #4 POLISH, SATIN FINISH
- FEET: 1" ADJUSTABLE STAINLESS STEEL BULLET FEET

OPTIONAL ACCESSORIES

DESCRIPTION	MODEL #	QTY
OVER SHELF		
UNDER SHELF		

14 GAUGE 304 16 GA. STAINLESS STEEL LEGS		16 GAUGE 304 16 GA. STAINLESS STEEL LEGS		16 GAUGE GALVANIZED LEGS	
PREMIUM	QTY	STANDARD	QTY	VALUE	QTY
SDT4-S26SBK-L OR R		SDT6-S26SBK-L OR R		SDT6-S26GBK-L OR R	
SDT4-S36SBK-L OR R		SDT6-S36SBK-L OR R		SDT6-S36GBK-L OR R	
SDT4-S48SBK-L OR R		SDT6-S48SBK-L OR R		SDT6-S48GBK-L OR R	
SDT4-S60SBK-L OR R		SDT6-S60SBK-L OR R		SDT6-S60GBK-L OR R	
SDT4-S72SBK-L OR R		SDT6-S72SBK-L OR R		SDT6-S72GBK-L OR R	
SDT4-S84SBK-L OR R		SDT6-S84SBK-L OR R		SDT6-S84GBK-L OR R	
SDT4-S96SBK-L OR R		SDT6-S96SBK-L OR R		SDT6-S96GBK-L OR R	
SDT4-S108SBK-L OR R		SDT6-S108SBK-L OR R		SDT6-S108GBK-L OR R	
SDT4-S120SBK-L OR R		SDT6-S120SBK-L OR R		SDT6-S120GBK-L OR R	
SDT4-S132SBK-L OR R		SDT6-S132SBK-L OR R		SDT6-S132GBK-L OR R	
SDT4-S144SBK-L OR R		SDT6-S144SBK-L OR R		SDT6-S144GBK-L OR R	

DETAILED SPECIFICATIONS

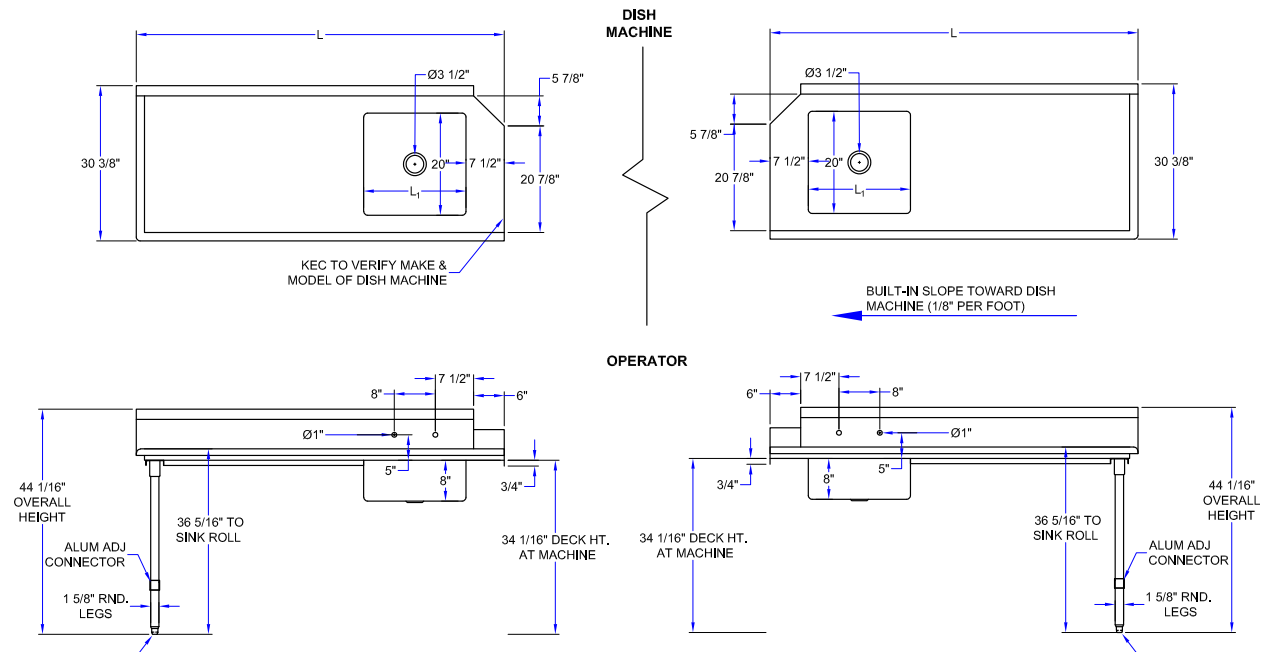


• UNITS 7 FT. AND LARGER ARE FURNISHED WITH SIX LEGS.

L1	LENGTH	14 GAUGE 304 16 GA. STAINLESS STEEL LEGS		16 GAUGE 304 16 GA. STAINLESS STEEL LEGS		16 GAUGE GALVANIZED LEGS	
		PREMIUM	WT. (LBS)	STANDARD	WT. (LBS)	VALUE	WT. (LBS)
16"	24"	SDT4-S26SBK-L OR R	46	SDT6-S26SBK-L OR R	37	SDT6-S26GBK-L OR R	37
20"	36"	SDT4-S36SBK-L OR R	59	SDT6-S36SBK-L OR R	47	SDT6-S36GBK-L OR R	47
20"	48"	SDT4-S48SBK-L OR R	78	SDT6-S48SBK-L OR R	62	SDT6-S48GBK-L OR R	62
20"	60"	SDT4-S60SBK-L OR R	90	SDT6-S60SBK-L OR R	72	SDT6-S60GBK-L OR R	72
20"	72"	SDT4-S72SBK-L OR R	109	SDT6-S72SBK-L OR R	87	SDT6-S72GBK-L OR R	87
20"	84"	SDT4-S84SBK-L OR R	130	SDT6-S84SBK-L OR R	104	SDT6-S84GBK-L OR R	104
20"	96"	SDT4-S96SBK-L OR R	143	SDT6-S96SBK-L OR R	113	SDT6-S96GBK-L OR R	114
20"	108"	SDT4-S108SBK-L OR R	174	SDT6-S108SBK-L OR R	139	SDT6-S108GBK-L OR R	139
20"	120"	SDT4-S120SBK-L OR R	205	SDT6-S120SBK-L OR R	164	SDT6-S120GBK-L OR R	164
20"	132"	SDT4-S132SBK-L OR R	236	SDT6-S132SBK-L OR R	189	SDT6-S132GBK-L OR R	189
20"	144"	SDT4-S144SBK-L OR R	268	SDT6-S144SBK-L OR R	214	SDT6-S144GBK-L OR R	214

MODEL # STRUCTURE

S = STRAIGHT DISHTABLE
6 = 16GA WORK SURFACE
SDT = SOILED DISHTABLE

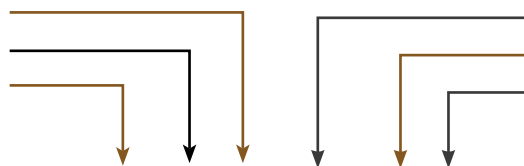

60 = TOTAL LENGTH OF DISHTABLE
SB = STAINLESS LEGS & BRACING
K = K.D. W/ ADJUSTABLE BRACING

SDT6-S60SBK

SOME UNITS SHIP UNASSEMBLED FOR REDUCED SHIPPING COST. ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500"
John Boos & Co. is constantly engaged in a program of improving products and therefore reserves the right to change specifications without prior notice.



Boos
lock

AQ AutoQuotes

3601 S. Banker St. • Effingham, IL 62401 • PO BOX 609 • quotes@johnboos.com

www.johnboos.com

020119

335