



BR72L-SSS-LRR

Verify if optional BS-600 Solenoid Valve and Thermostat Kit is required for installation.



Remote Back Bar Coolers

- 35”H without top
- 36”H with optional 1” stainless steel top
- 24” front to back depth (25” with top)
- Heavy duty self-closing doors
- Stainless steel handles with built-in locks
- Listed to NSF standard 7 for open food storage
- Optional 1/3 HP condensing unit available below
- Expansion valve installed in unit, specify type 134A or R448A refrigerant
- 115V, 1 phase, 60 Hz.
- All stainless steel, coved corner interior
- NSF epoxy coated durable shelves. One bottom and two adjustable shelves per door
- One supply hook-up side (specify side)
- 3/8” supply outlets, 1/4” supply inlets
- 1-Year parts only warranty (no labor)
- 1-Year compressor, (if purchased) parts only warranty (no labor)
- NEMA 5-15P plug configuration

Specs

Model	Length	Doors	Weight	Case Capacity	Amps	BTUs
BR48	48”	2	208	12.0	1.0 (lights and fan)	1800, 16°F - 18°F
BR72	72”	3	395	20.0	1.5 (lights and fan)	2300, 16°F - 18°F
BR96	96”	4	510	30.0	2.0 (lights and fan)	3200, 16°F - 18°F

NOTE:

- Expansion valve installed on all units. Specify type 134A or R448A refrigerant.
- Back bar units are built to order and cannot be returned.
- Verify if optional BS-600 solenoid valve and thermostat kit are required for installation.

Options

Model	Description
BS-100	6” Stainless Steel Legs (Set of 4)
BS-101	6” Stainless Steel Legs (Set of 6)
BS-102	4” Stainless Steel Legs (Set of 4)
BS-103	4” Stainless Steel Legs (Set of 6)
BS-106	Left Side Stainless Steel Kick Plate

Model	Description
BS-107	Right Side Stainless Steel Kick Plate
BS-148	48” Stainless Steel Front Kick Plate
BS-172	72” Stainless Steel Front Kick Plate
BS-196	96” Stainless Steel Front Kick Plate
BS-600	110V Solenoid Valve & Thermostat

Model	Description
BC-618-CU	1/3 404A and R448A Condensing Unit (for Remote Units)
BC-783-CU	1/3 134A Condensing Unit (for Remote Units)
BC-811	Side Guard Rail for Shelving

NOTE: Legs are required when ordering kick plates.

Remote Back Bar Coolers Configuration Table

Use this configuration table to create your back bar refrigerator.

Choose a letter in each numbered category to build your model number.

See below example.

No.	Category	Letter	Description
1	Base Model	BR48	48" 3-Door
		BR72	72" 3-Door
		BR96	96" 4-Door
2	Supply Connection	L	Supply Connection on Left
		R	Supply Connection on Right
3	Door Finish	B	Black Vinyl
		S	Stainless Steel
		G	Glass with Black Vinyl
		K	Glass with Stainless Steel
		T	Sliding Glass Door with Black Trim
4	Top Finish	N	Unfinished
		S	Stainless Steel (required with sliding glass door)
5	Cabinet Sides	S	Stainless Steel
6	Door Hinge	L	Left Hinge
		R	Right Hinge

New

Sliding Doors now available on 48" & 96" remote units.

Glass Doors with Black Trim




Sample 48" Sliding Glass Door Model Number

BR48L-TSS
1 2 3 4

Sample Two Door Model Number

Choose a letter in each numbered category to build your model number.

BR48L-BSS-LR
1 2 3 4 5 6 6

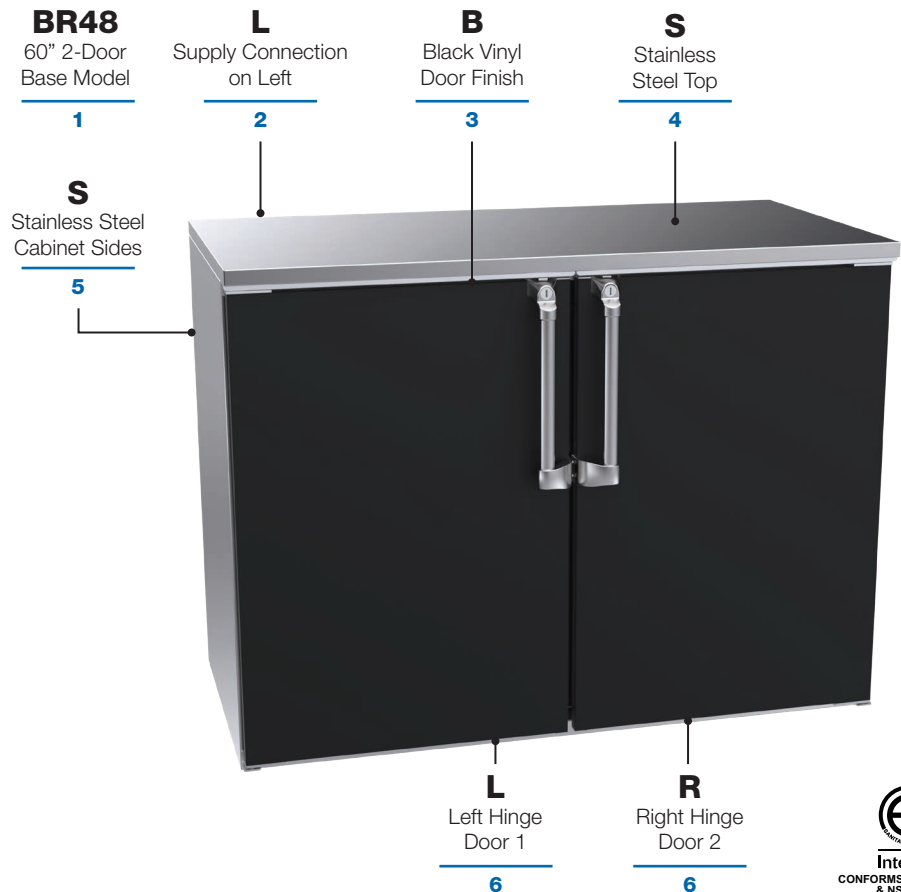

FridgeFlex™

A cooler way to configure your fridge.

krowne.com/fridgeflex

