

Retarder Proofer — Two Door, Condenser Included

Series LRPR3-HO-C



LRPR3-30HO-C (Rack not included)



Meets UL 197 and NSF 2 Standards

Short Bid Specification:

Proofer Retarder shall be an **LBC Bakery Equipment Model LRPR3-__HO-C** (insert 30, 40, 50, 60, 70, 80, 90, 100, 110, or 120 to indicate desired depth). Appliance shall be a double-wide roll-in rack unit, electrically heated with double doors, a quick response air-wash heat and humidity system, high output refrigeration system that includes the solenoid valve(s), expansion valve(s), line dryer(s) and epoxy coated evaporator coils, and modular foam-insulated panel construction. Interior shall be 300 series stainless steel with perimeter bumpers to protect door and walls. Doors shall have a magnetic seal, automatic closers and a full-width protective bar handles. Computerized control shall be door mounted at eye-level with accurate LED displays for Time, Temperature and Humidity. Complete appliance shall have all features listed and, if selected, optional 300-series stainless steel floor and/or 72610-48 water filtration system. **Pre-charged refrigeration shall be optional** (Available up to -50).

Standard Product Warranty:

One Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

Rack Capacity:

Model	Side Load	End Load	Double
LRPR3-30HO-C	3	4	N/A
LRPR3-40HO-C	3	4	3
LRPR3-50HO-C	6	4	3
† LRPR3-60HO-C	9	8	3
† LRPR3-70HO-C	9	8	3
† LRPR3-80HO-C	12	8	6
† LRPR3-90HO-C	12	12	6
† LRPR3-100HO-C	15	12	6
† LRPR3-110HO-C	15	16	6
† LRPR3-120HO-C	18	16	9

† Pre-charged option not available on these models

Construction Features:

- Heavy-duty stainless steel exterior with 300 series stainless steel interior and aluminized steel top
- Foam-insulated walls, ceiling and door
- Modular wall and ceiling panels with cam interlocks
- Tubular heaters; non-submerged to extend life
- Lighted interior
- Inner bumpers to protect interior walls and doors
- 208VAC or 240VAC 1- or 3-phase power, field convertible (Heating)
- Refrigeration components compatible with R448A refrigerant
- 208VAC 1-Phase power (Cooling)

Performance Features:

- Dual purpose, provides both proofing and retarding
- Rapid responding air-wash heat and humidity system
- Proofing Temperature Range: 70-120 deg F
- Retarding Temperature Range: 34-45 deg F
- Humidity Range: 50-99%
- Evaporators sized for high humidity levels to prevent drying of product
- Refrigeration system sized for rapid pull-down
- PID-type controller design to ensure rapid and accurate response without overshoot

Control Features:

- Control is mounted in the door at eye-level
- Large LED displays for Time, Temperature, and Humidity

Options and Accessories:

- **Pre-charged refrigeration system** (Available up to -50)
- Rugged 300-series stainless steel floor
- 72610-48 Water Filtration System

Retarder Proofer — Two Door, Condenser Included

Series LRPR3-HO-C


Installation Requirements:

- Factory authorized start-up required
- Ships knocked down. Requires on-site assembly
- Appliance is designed to operate at normal room temperatures
- Should not be installed within 4" of oven or other heat source to prevent heat transfer
- Clearance to combustibles is 0" sides and back
- Floor must be level to within 1/8" per foot. Difference for entire floor must not exceed 3/4"
- For installation on non-porous surfaces only

Note: Refrigeration system may require installation by a licensed refrigeration technician

Options and Accessories:

- Stainless Steel Floor 72610-48 Water Filtration Assembly Pre-Charged Refrigeration System
(Only up to -50 deep)

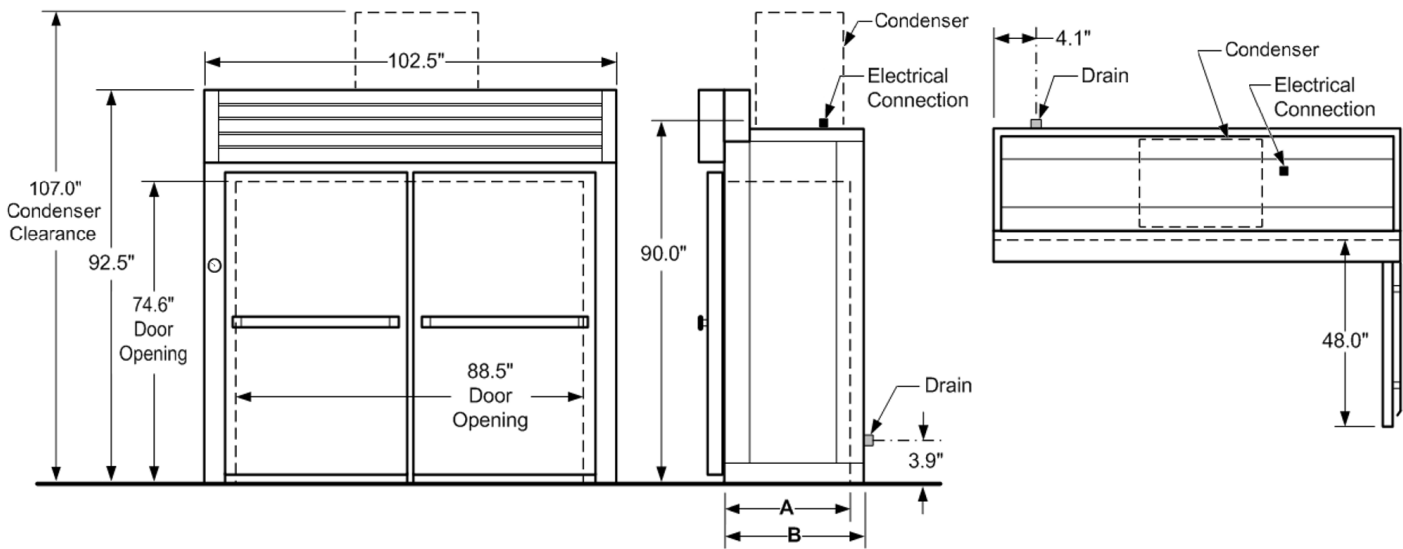

Utility Requirements:

Model	Cooling * 208VAC		Heating * (6.0 kW max) 208-240VAC			Retarder BTU @ 35 deg F
	MCA	MOP	MCA 1 ph	MCA 3 ph	MOP	
LRPR3-30HO-C	9.7, 1P	15	35	20	50	6000
LRPR3-40HO-C	12.7, 1P	15	35	20	50	8600
LRPR3-50HO-C	12.7, 1P	15	35	20	50	8600
† LRPR3-60HO-C	17.2, 1P	20	35	20	50	11000
† LRPR3-70HO-C	17.2, 1P	20	N/A	40	60	11000
† LRPR3-80HO-C	22.4, 1P	35	N/A	40	60	15600
† LRPR3-90HO-C	22.4, 1P	35	N/A	40	60	15600
† LRPR3-100HO-C	22.4, 1P	35	N/A	40	60	15600
† LRPR3-110HO-C	21.8, 1P	30	N/A	40	60	21000
† LRPR3-120HO-C	21.8, 3P	30	N/A	40	60	21000

Dimensions:

Dim A (in)	Dim B (in)
29.0	31.0
39.0	41.0
49.0	51.0
59.0	61.0
69.9	71.0
79.0	81.1
89.0	91.1
99.0	101.1
109.0	111.1
119.0	121.1

Shipping Information:

Weight (lbs)		Freight Class
Actual	Shipping	
1172	1472	85
1282	1582	
1422	1722	
1532	1832	
1642	1942	
1982	2282	
2269	2569	
2379	2679	
2619	2919	
2729	3029	

* 2 separate electrical supplies required
 † Pre-charged option not available on these models

Water Quality Requirements:

pH: 7.0-8.5
Total Hardness < 50 ppm
Chlorides < 50 ppm
Total Chlorine < 0.5 ppm
Iron < 0.3 ppm

Water	Drain
1/2" NPT, cold, filtered 0.07 gpm @ 60 psi	3/4" copper, Route to air gap drain