

# Open Pan & Tray Racks

## Economy Series - Stainless Steel



Model 155

### Durable, efficient storage system with all-welded stainless steel construction.

- No assembly required.
- Both channel and angle style ledges are electronically welded to the uprights to withstand continual use. Tie bars are welded to the uprights for added rigidity.
- A variety of casters are available from economical 4" (102 mm) corner stem to heavy duty 5" (127 mm) recessed plate with No-Mark® polyurethane wheels.
- Welded stainless steel design is easy to sanitize and maintain.

### Ideal for...

- Hotels, central kitchens, hospitals and schools.
- Refrigerated or dry storage.
- Convenient sheet pan and tray transport.



## Specifications

Unit shall be of all-welded construction and shall accommodate 18" x 26" pans or 14" x 18" pans and trays.. Corner upright legs, and top and bottom frame shall be of .104 x 3/4" x 1-1/4" angle stainless steel. Pan/tray ledges shall be of 16-gauge stainless steel and shall be welded to upright legs front and back. Top and bottom corner frame joints shall have 20-gauge reinforcing gussets welded in place for extra rigidity. Unit shall have a 16-gauge x 1/2" x 1/2" angle stainless steel horizontal brace welded to upright legs at open ends front and back. Casters shall be 4" diameter swivel stem type, corner mounted to corner legs for upright stability. Unit shall be NSF listed.

### Optional Accessories

- Set of four each corner leg bumpers.
- Welded pan top rod.



Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com


# Open Pan & Tray Racks

## Economy Series - Stainless Steel

Top View



Model 156

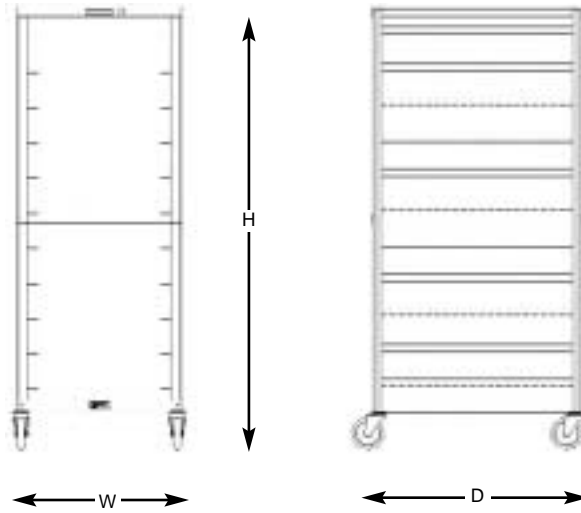

AutoCAD drawings available through KCL CADalog

### Dimensions

Model	Pan Capacity		Ledge Description			Overall Size			Lake-Glide® Casters		Case Weight	
	Full	Half	Type	Spacing	Width	W	D	H	Type	Dia.	Lbs.	(Kg)
125	35 ea.	70 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	27-1/4" (692)	57-1/2" (1460)	Corner Stem	4" (102)	64	(29)
126	41 ea.	82 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	27-1/4" (692)	67-1/2" (1715)	Corner Stem	4" (102)	70	(31.8)
135	16 ea.	32 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	27-1/4" (692)	57-1/2" (1460)	Corner Stem	4" (102)	62	(28.1)
136	20 ea.	40 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	27-1/4" (692)	67-1/2" (1715)	Corner Stem	4" (102)	68	(30.8)
155	10 ea.	20 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	27-1/4" (692)	57-1/2" (1460)	Corner Stem	4" (102)	50	(22.7)
156	12 ea.	24 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	27-1/4" (692)	67-1/2" (1715)	Corner Stem	4" (102)	55	(25)

Measurements in ( ) denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com