

# Autobroil™

# Models 2424(G) 121224(G) Straight Through Conveyor Broilers

0.
RACTOR APPROVAL



Marshall Models 2424(G) and 121224(G) Gas and Electric Broilers are designed for high volume hamburger or meat filet production. The 1000° plus metal infrared heat source broils the meat quickly, giving the advantage of speed, plus sealing in juices for better taste.

Model 2424(G) has two 24" belts, one for broiling and one for contact toasting. Model 121224(G) has two 12" broiling belts and one 24" belt for contact toasting, which allows for different cooking speeds and menu flexibility. In both models, food is loaded at the front of broiler or toaster and is automatically delivered to holding trays at rear.

All Marshall products are supported by a nationwide service organization and in-house, full-time Customer Support Department. To place an order call:

1-800-627-8368

ETL (US, Canada) & NSF Listed FOR COMMERCIAL USE ONLY

\*Ask about Marshall's ThermoGlo™ Food Warmers, companion High Speed Toasters, and Ventilation Systems Marshall's largest capacity, high production hamburger and meat filet broilers. High temperature infrared heat and direct on-conveyor broiling for speed, flavor enhancement and bar marks.

#### **FEATURES**

- An integrated control features 6 menu item programs on single belt and 3 per belt on dual belt broilers (time & temperature)
- Control features broiled self-diagnostics
- Optional on-board food probe
- Front return cooking arrangement Fully automatic
- Electronic ignition (gas) Simply use the on/off switch
- Individual plug-in motors and speed control selectors for each broiler belt
- Convenient functional patty/bun assembly area with ThermoGlo<sup>TM</sup> technology
- Less removable parts allow fast and easy clean up
- Energy- saving pilot shut-off system (gas)
- Built-in bun toaster

#### CONSTRUCTION

- Heavy gauge stainless steel solid weld frame construction
- 3/16" diameter, heavy-duty stainless steel conveyor rods
- Stainless steel internal gas lines (gas models)
- Simple conveyor tension adjustment
- Easy to operate computer control panel
- Heavy duty industrial grade heating elements or gas burners

#### **VOLUME**

#### **Hamburger Peak Production:**

Frozen 2 oz. patties 850/hr.
4 oz. patties 510/hr.
Fresh 2 oz. patties 1,060/hr.
4 oz. patties 640/hr.

Buns Exceeds burger production

(Figures for estimating only. Actual production varies with fat content, surface texture and meat starting temperature.)


#### Marshall Air Systems, Inc.

419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • www.marshallair.com



## Models 2424 (G) & 121224 (G)

## Front Return Conveyor Gas & Electric Broilers

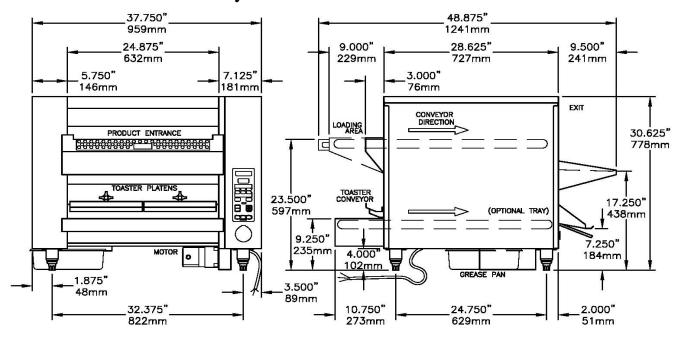

#### Overall Dimensions Model 2424 (G) & 121224 (G)

Dimensions:	Height: 30.625"	Width: 37.750"	Depth: 48.875" (with 9"	loading arms)
	778mm 959mm		1241mm	
Shipping	Weight:	Ship Wt:	Freight (USA)	Ship. Cubes:
Information:	Net 485 lbs.	525 lbs.	NMFC	58.2 cubic ft.
	207 kg	239 kg	Class 85	1.65 cubic meters
Electrical:	Electric Units			Gas Units
	208V/60Hz/3 ph			208-240V/60Hz/1 ph
	64 amps/ 18.5 kw (L1,L2,L3,G)			19 amps/ 3.952 kw (L1,L2,N,G)
	380V/50Hz/3 ph			240V/50Hz/1 ph
	42 amps/ 22 kw (L1,L2,L3,N,G)			22 amps/ 5.280 kw (L1,N,G)
Gas Supply:	N/A			97,000 BTUH – LP or Nat.
				3/4" NPT Supply
Options:	Autocat <sup>TM</sup> - Catalytic Converter (gas units only)		(gas units only)	Extended Loading Arms
	Autoloader <sup>TM</sup> - Automatic Loading System			Companion Ventilation System
	Heavy-duty stainless steel stand with casters			Complete spare parts supply kit
	Other international voltages available			
	48" Flexible gas line with quick disconnect and restraining device (gas units only)			
	Food probe			

#### Marshall Air Systems, Inc.

419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • www.marshallair.com