

Autogrill[™] Model HST13-CTG Conveyor Tortilla Grill

Item No:				
AIA FILE NO./ SPEC NO.				
CONSULTANT/ CONTRACTOR APPROVAL				



Model HST13-CTG

The Marshall Model HST13-CTG Conveyor Tortilla Grill produces 170°F tortillas in 13 seconds without chain or bar marks. The grill has two chambers so that two tortillas can be grilled at one time. This means production is more than double that of a clam shell type grill. Tortillas are loaded at the top and delivered to a product slide at the bottom. The variable speed drive ranges from 13 to 60 seconds. Heat controls are preset but can be adjusted as required. Both sides of the tortilla are grilled at the same time. Adjustable controls for various tortilla thicknesses and grilling speeds are located inside the secure, side panel cabinet thus eliminating unauthorized tampering. The flexibility of this grill delivers consistently hot tortillas in the shortest time.

All Marshall products are supported by a nationwide service organization and in-house, fulltime Customer Support Department. To place an order call:

1-800-627-8368

Marshall's high-speed conveyor tortilla grill is designed specifically for QSR, fast casual restaurants, sandwich shops, cafeterias, snack bars and convenience stores.

FEATURES

- Both sides of tortilla grilled simultaneously
- Grills to 170°F as fast as 13 seconds
- Easy to operate control panel
- Adjustable for different tortilla thicknesses
- Adjustable speed
- Heavy-duty, long life mark-free belts
- Removable slip sheets for ease of cleaning
- Uses small electrical circuit (20 amp)

CONSTRUCTION

- Heavy gauge stainless steel frame
- Solidly welded frame construction
- Large bearings for longer life
- Plug-in motor and solid-state speed control
- Heavy-duty drive system

VOLUME

Tortilla Peak Production:

500 13" tortillas per hour 2,200 5.5" tortillas per hour

(Figures for estimating only. Actual production can be calculated with food specifics.)


*Ask about Marshall's ThermoGlo[™] Food Warmers, companion Conveyor Broilers and Ventilation Systems.

ETL (US, Canada) & NSF Listed FOR COMMERCIAL USE ONLY

Marshall Air Systems, Inc.

419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • www.marshallair.com

Printed in U.S.A.[©] Marshall Air Systems, Inc. 2014 All rights reserved. Marshall's commitment to quality and product improvement may change specifications from time to time.

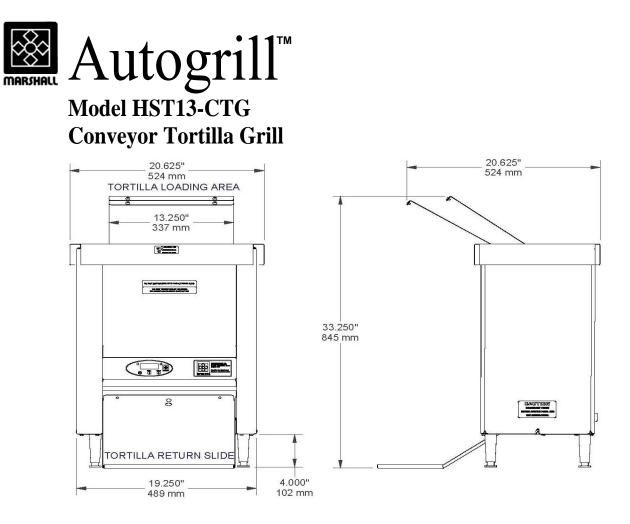

Overall Dimensions Model HST13-CTG

Dimensions:	Height: 33.250" 845mm	Width: 20.625" 524mm	Depth: 20.625" 524mm	
Shipping Information:	Weight: Net 115 lbs. 54 kilos	Ship Wt: 130 lbs. 61 kilos	Freight (USA): NMFC 26100 Class 100	Ship Cubes: 8 cubic ft. 0.23 cubic meters
Electrical Wiring:	208V/60Hz/1 ph 18 amps/ 3.7 kw NEMA L6-20P Plug		240V/60Hz/1 ph 20.5 amps/ 5 kw NEMA L6-30 Plug	240V/50Hz/ 1ph 20.5 amps/ 5 kw L1, N, G (No Plug)
Gas Supply:	None			
Options:	None			

Marshall Air Systems, Inc.

419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • www.marshallair.com

Printed in U.S.A.© Marshall Air Systems, Inc. 2014 All rights reserved. Marshall's commitment to quality and product improvement may change specifications from time to time.