




Item # \_\_\_\_\_

Job \_\_\_\_\_

## HD SUPER™ DUNNAGE RACKS

- **Holds More than a Ton:** Stores goods safely up off the floor. The 48" (1220mm) length rack has a 3,000 lb. (1360kg) uniformly distributed static load capacity; the 60" (1525mm) length rack holds up to 2,400 lbs. (1087kg).
- **Withstands Impact:** The extra capacity of the HD Super™ dunnage rack translates into an increased ability to stand up under the strain of unbalanced loads and the repeated impact of materials being placed on it.
- **HD Super™ Design:** Provides fast, secure assembly without the use of any special tools. 1<sup>5</sup>/<sub>8</sub>" (41mm) posts provide greater rigidity.
- **Efficient Storage:** The low profile of Metro dunnage racks makes it easy to store large, bulky items without taking up valuable shelf space.
- **Removable Wire Deck:** Fits top support frame. Lifts off for thorough cleaning. Offset wire design raises deck above post caps, helps prevent items from snagging or tearing.
- **Convenient:** Lower support frame is open in front – no need to move the rack to clean beneath it. Open wire grid minimizes dust and moisture accumulation on deck.
- **Available Options:** Chrome-plated, Metroseal 3™ or stainless steel.
- **Leveling Feet:** Compensate for surface irregularities.

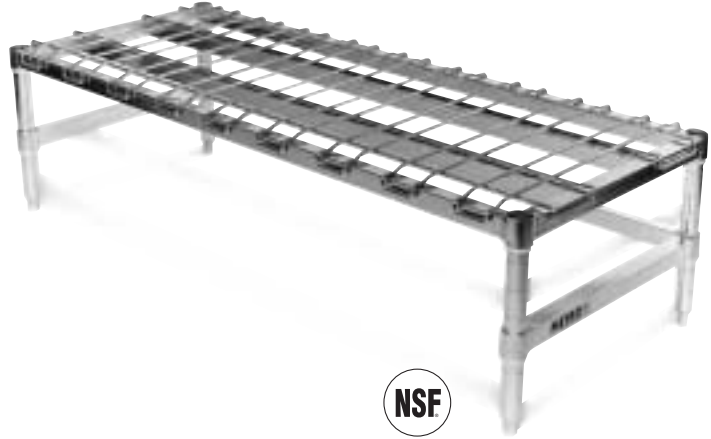

**Dunnage Racks HDP Series**



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
[www.metro.com](http://www.metro.com)



**10.68**


Job \_\_\_\_\_



## HD SUPER™ DUNNAGE RACKS

### Specifications

- **Construction:** Top and lower support frames are made of 1½" (38mm) square tubing. Removable deck consists of 5/16" (8mm) diameter wire.

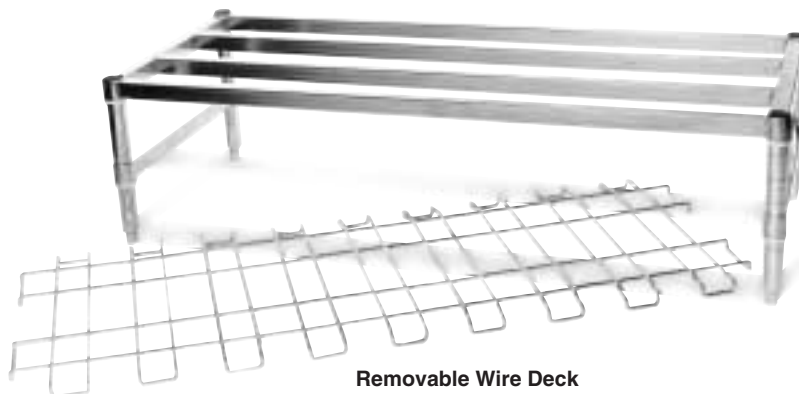

Removable Wire Deck

### Dimensions

Cat. No. Chrome	Cat. No. Metroseal 3™	Cat. No. Stainless	Width		Length		Height		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
HDP35C	HDP35K3	HDP35S	18	455	48	1220	16¼	413	52	24
HDP36C	HDP36K3	HDP36S	18	455	60	1525	16¼	413	62	28
HDP55C	HDP55K3	HDP55S	24	610	48	1220	16¼	413	57	26
HDP56C	HDP56K3	HDP56S	24	610	60	1525	16¼	413	66	30

Maximum capacity 2,400 lbs. (1087kg) uniformly distributed static load on the 60" (1524mm) length racks; 3,000 lbs. (1360kg) on the 48" (1220mm) length racks.

**Note:** Capacity will be reduced and the unit will become less stable if the 3-sided frame is mounted higher than 6" (152mm) from the floor.

**Note:** For more information on Metroseal 3, refer to sheet #10.10a.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



#### InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

L02-032  
Printed in U.S.A. Rev. 2/03

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2003 InterMetro Industries Corp.