



Item# \_\_\_\_\_

Job \_\_\_\_\_

## SUPER ERECTA SHELF® DUNNAGE RACKS – Stationary & Mobile

- **Efficient Storage:** The low profile of Metro dunnage racks makes it easy to store large, bulky items off the floor without taking valuable shelf space.
- **Removable Wire Mat:** Fits top support frame. Lifts off for thorough cleaning. Offset wire design raises mat above post caps, preventing items from snagging or tearing. (Units without mat offered also.)
- **Super Erecta Shelf® Design:** Provides fast, secure assembly without the use of any special tools.
- **Available Options:** Chrome-plated, Metroseal 3™ or selected sizes in stainless steel.



Stationary Dunnage Racks With Mat



Stationary Dunnage Racks Without Mat

### Stationary Dunnage Racks With Wire Mat


- **Convenient:** Lower support frame is open in front – no need to move the rack to clean beneath it. Open wire grid minimizes dust and moisture accumulation on mat.
- **Leveling Bolts:** Compensate for surface irregularities.

### Stationary Dunnage Racks Without Wire Mat

- **Available in Four Sizes and Two Finishes:** Chrome and Metroseal 3™.

### Mobile Dunnage Racks

- **Maneuverable:** Two swivel casters and two swivel/brake casters provide excellent maneuverability plus manageability. Casters are 5" (127 mm), non-marking polyurethane tread, designed for heavy-duty use.

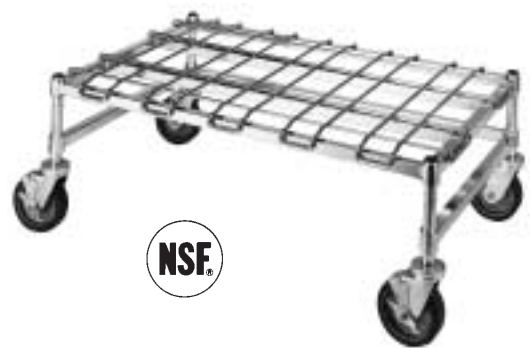

Mobile Dunnage Racks



InterMetro Industries Corporation  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com



# SUPER ERECTA SHELF® DUNNAGE RACKS – Stationary & Mobile



- **Construction:** Top and lower support frames are made of 1" square tubing. Removable offset mat consists of 5/16" diameter wire.
- **Heights:** Stationary dunnage racks are 14 1/2" high including cap and leveling bolt. Mobile dunnage racks are 14" high.

## DIMENSIONS:

### Stationary Dunnage Racks With Wire Mat

| Width |      | Length |      | Approx. Pkd. Wt. |      | Cat. No. | Cat. No.    | Cat. No.  |
|-------|------|--------|------|------------------|------|----------|-------------|-----------|
| (in.) | (mm) | (in.)  | (mm) | (lbs.)           | (kg) | Chrome   | Metroseal 3 | Stainless |
| 18    | 455  | 24     | 610  | 22.1             | 9.9  | HP31C    | HP31K3      |           |
| 18    | 455  | 30     | 760  | 24.8             | 11.2 | HP32C    | HP32K3      |           |
| 18    | 455  | 36     | 910  | 29.7             | 13.4 | HP33C    | HP33K3      | HP33S     |
| 18    | 455  | 48     | 1220 | 38.3             | 17.2 | HP35C*   | HP35K3*     | HP35S*    |
| 24    | 610  | 24     | 610  | 27.6             | 12.4 | HP51C    | HP51K3      |           |
| 24    | 610  | 30     | 760  | 29.9             | 13.5 | HP52C    | HP52K3      |           |
| 24    | 610  | 36     | 910  | 35.6             | 16.0 | HP53C    | HP53K3      | HP53S     |
| 24    | 610  | 48     | 1220 | 42.0             | 18.9 | HP55C*   | HP55K3*     | HP55S*    |

Maximum distributed static load capacity 1600 lbs. except on units marked \* which have a 1300 lb. capacity.

### Dunnage Racks Without Wire Mat

| Width |      | Length |      | Approx. Pkd. Wt. |      | Cat. No. | Cat No.     |
|-------|------|--------|------|------------------|------|----------|-------------|
| (in.) | (mm) | (in.)  | (mm) | (lbs.)           | (kg) | Chrome   | Metroseal 3 |
| 18    | 455  | 36     | 910  | 21               | 9.5  | HP33TFC  | HP33TFK3    |
| 18    | 455  | 48     | 1220 | 27               | 12.2 | HP35TFC  | HP35TFK3    |
| 24    | 610  | 36     | 910  | 26               | 11.8 | HP53TFC  | HP53TFK3    |
| 24    | 610  | 48     | 1220 | 29               | 13.2 | HP55TFC  | HP55TFK3    |

### Mobile Dunnage Racks

| Width |      | Length |      | Approx. Pkd. Wt. |      | Cat. No. | Cat No.     | Cat. No.  |
|-------|------|--------|------|------------------|------|----------|-------------|-----------|
| (in.) | (mm) | (in.)  | (mm) | (lbs.)           | (kg) | Chrome   | Metroseal 3 | Stainless |
| 18    | 455  | 36     | 910  | 41.7             | 18.9 | MHP33C   | MHP33K3     | MHP33S    |
| 18    | 455  | 48     | 1220 | 50.2             | 22.8 | MHP35C   | MHP35K3     | MHP35S    |
| 24    | 610  | 36     | 910  | 47.6             | 21.6 | MHP53C   | MHP53K3     | MHP53S    |
| 24    | 610  | 48     | 1220 | 54.0             | 24.5 | MHP55C   | MHP55K3     | MHP55S    |

Maximum distributed static load capacity 800 lbs.

**NOTE:** These units are designed for only the 5HP and 5HPB casters, which are shipped assembled with special posts.

**NOTE:** For more information on Metroseal 3, refer to sheet #10.10a.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



### InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232  
Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-023  
Printed in U.S.A. Rev. 2/03

Information and specifications are subject to change without notice. Please confirm at time of order

Copyright © 2003 InterMetro Industries Corp.

