



Item # _____

Job _____

SECURITY UNITS

Features:


- **Safe Storage:** Protects valuable materials and sensitive items from loss or pilferage.
- **Microban® Antimicrobial Product Protection*:** Metroseal 3 and MetroMax Q models feature Microban Antimicrobial Product Protection, designed to stay “cleaner between cleanings.”
- **Ready View of Contents:** Heavy-gauge open wire construction keeps the entire contents of the truck visible at all times, making it easy to check inventory.
- **Adjustable, Optional Intermediate Shelves:** Patented, easily adjustable shelf designs — Super Adjustable Super Erecta, MetroMax Q, and qwikSLOT — allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.
- **Patented, Ergonomic, 1/4-Turn Door Handle:** Makes opening and closing the unit easier than conventional security unit designs.
- **Double Door:** Each door opens 270 degrees and can be secured along the sides of the unit.
- **Time Saving Assembly:** Metro security units assemble quickly — right out of the box.
- **Shipped Knocked-Down:** Saves on freight costs. Easily assembled.

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

- **Safe Transportation:** Mobile, security trucks provide the advantage of quick, protective transportation.
- **Easy Cleaning of Storage Areas:** Mobile units move easily from walls to allow thorough cleaning of floors and walls.
- **Mobile Units:** Available in Standard and Heavy-Duty models. Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.
- **Stationary Units:** Posts have leveling feet to compensate for uneven surfaces.



Super Erecta Shelf (HD Mobile) with optional Super Adjustable Super Erecta® Intermediate shelves

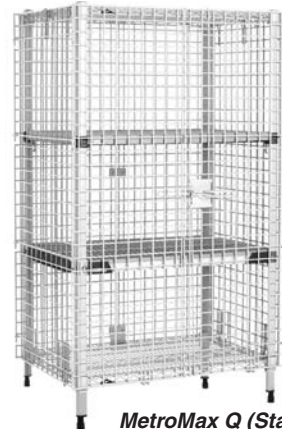

MetroMax Q (Stationary) with optional Intermediate shelves



quwikSLOT (Mobile) with optional Intermediate shelves



Handle (open position)



Handle (closed position)

*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com





Specifications

Super Erecta Shelf Stationary Security

| Model No. Chrome | Model No. Metroseal 3 | Model No. Stainless Steel | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------------------|--------------------------------|------|--------------------------------|------|----------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33C | SEC33K3 | SEC33S | 21 ¹ / ₂ | 546 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 18x36 | 457x914 | 138 | 63 |
| SEC35C | SEC35K3 | SEC35S | 21 ¹ / ₂ | 546 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 18x48 | 457x1219 | 157 | 71 |
| SEC53C | SEC53K3 | SEC53S | 27 ¹ / ₄ | 692 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 24x36 | 610x914 | 154 | 70 |
| SEC55C | SEC55K3 | SEC55S | 27 ¹ / ₄ | 692 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 24x48 | 610x1219 | 174 | 79 |
| SEC56C | SEC56K3 | SEC56S | 27 ¹ / ₄ | 692 | 62 ¹ / ₂ | 1587 | 66 ¹³ / ₁₆ | 1695 | 24x60 | 610x1524 | 195 | 89 |
| SEC63C | | SEC63S | 33 ¹ / ₂ | 851 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 30x36 | 760x914 | 167 | 76 |
| SEC65C | | SEC65S | 33 ¹ / ₂ | 851 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 30x48 | 760x1219 | 193 | 88 |
| SEC66C | | SEC66S | 33 ¹ / ₂ | 851 | 62 ¹ / ₂ | 1587 | 66 ¹³ / ₁₆ | 1695 | 30x60 | 760x1524 | 215 | 98 |

Super Erecta Shelf Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

| Model No. Chrome | Model No. Metroseal 3 | Caster Type | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------|--------------------------------|------|--------------------------------|------|--------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33EC | SEC33EK3 | (2) 5MP/(2) 5MPB | 21 ¹ / ₂ | 546 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 18x36 | 457x914 | 146 | 66 |
| SEC35EC | SEC35EK3 | (2) 5MP/(2) 5MPB | 21 ¹ / ₂ | 546 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 18x48 | 457x1219 | 165 | 75 |
| SEC53DC | SEC53DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| SEC55DC | SEC55DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| SEC56DC | SEC56DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| SEC53EC | SEC53EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| SEC55EC | SEC55EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| SEC56EC | SEC56EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| | SEC53VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| | SEC55VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| | SEC56VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| SEC63EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 30x36 | 760x914 | 175 | 80 |
| SEC65EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 30x48 | 760x1219 | 202 | 92 |
| SEC66EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 30x60 | 760x1524 | 223 | 101 |

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread.

5PC and 5PCB (with locking brake) castes feature a polymer horn and resist rusting. They are recommended for high-moisture environments.

Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

| Model No. Chrome | Model No. Metroseal 3 | Caster Type | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|--------------|---------------------------------|------|--------------------------------|------|--------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC53LC | SEC53LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 38 ¹ / ₂ | 980 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 187 | 85 |
| SEC55LC | SEC55LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 50 ¹ / ₂ | 1285 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 210 | 95 |
| SEC56LC | SEC56LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1600 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 235 | 107 |

Stainless Steel: Casters must be ordered separately on "-SD" models. Dollies and casters must be ordered separately on "-HD" models.

| Model No. | Description | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|-----------|---------------|---------------------------------|------|--------------------------------|------|--------|------|------------|----------|------------------|------|
| | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33S-SD | Standard Duty | 21 ¹ / ₂ | 546 | 40 ³ / ₄ | 1035 | 62 | 1575 | 18x36 | 457x914 | 138 | 63 |
| SEC35S-SD | Standard Duty | 21 ¹ / ₂ | 546 | 52 ³ / ₄ | 1340 | 62 | 1575 | 18x48 | 457x1219 | 157 | 71 |
| SEC53S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 62 | 1575 | 24x36 | 610x914 | 154 | 70 |
| SEC55S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 62 | 1575 | 24x48 | 610x1219 | 174 | 79 |
| SEC56S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 65 | 1651 | 62 | 1575 | 24x60 | 610x1524 | 195 | 89 |
| SEC63S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 40 ³ / ₄ | 1035 | 62 | 1575 | 30x36 | 760x914 | 167 | 76 |
| SEC65S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 52 ³ / ₄ | 1340 | 62 | 1575 | 30x48 | 760x1219 | 193 | 88 |
| SEC66S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 65 | 1651 | 62 | 1575 | 30x60 | 760x1524 | 215 | 98 |
| SEC53S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 38 ¹ / ₂ | 980 | 62 | 1575 | 24x36 | 610x914 | 154 | 70 |
| SEC55S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 50 ¹ / ₂ | 1285 | 62 | 1575 | 24x48 | 610x1219 | 174 | 79 |
| SEC56S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1600 | 62 | 1575 | 24x60 | 610x1524 | 195 | 89 |

NOTE: Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm).

CAUTION: Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

Intermediate Super Adjustable Shelves for Super Erecta Shelf Security Units

| Model No. Chrome | Model No. Metroseal 3 | Model No. Stainless Steel | Width | | Length | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------------------|-------|------|--------|------|--------------------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| A1836NC | A1836NK3 | A1836NS | 18 | 457 | 36 | 914 | 9 ¹ / ₂ | 4.3 |
| A1848NC | A1848NK3 | A1848NS | 18 | 457 | 48 | 1219 | 12 | 5.4 |
| A2436NC | A2436NK3 | A2436NS | 24 | 610 | 36 | 914 | 13 | 6 |
| A2448NC | A2448NK3 | A2448NS | 24 | 610 | 48 | 1219 | 16 | 7 |
| A2460NC | A2460NK3 | A2460NS | 24 | 610 | 60 | 1524 | 21 | 9.5 |
| A3036NC | | A3036NS | 30 | 760 | 36 | 914 | 15 | 6.8 |
| A3048NC | | A3048NS | 30 | 760 | 48 | 1219 | 21 | 9.5 |
| A3060NC | | A3060NS | 30 | 760 | 60 | 1524 | 26 ¹ / ₂ | 11.8 |

NOTE: Standard Super Erecta shelves can also be used as intermediate shelves. Refer to catalog sheet 10.01 for more information.

MetroMax Q Security Units

- Microban antimicrobial product protection is built into the enclosures, doors, handles, and shelves to keep the product “cleaner between cleanings.”
- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i.

Specifications

- Standard Units consist of taupe epoxy coated top and bottom wire shelves, tri-lobal steel posts, wire enclosures, and doors. Casters and bumpers are included with mobile units. Intermediate shelves are sold separately.
- Grid openings: 1³/₄" x 1³/₄" (44 x 44mm).

MetroMax Q Stationary Units — 66³/₁₆" (1681mm) High

| Model No. | Actual Outside Dimensions (including handle) | | | | Fits Shelf | | Approx. Pkd. Wt. (lbs.) (kg) |
|-----------|---|-----|--------------------------------|------|------------|------------|------------------------------------|
| | Width (in.) (mm) | | Length (in.) (mm) | | (in.) | (mm) | |
| MQSEC53E | 26 ¹⁵ / ₁₆ | 685 | 38 ⁷ / ₈ | 987 | 24 x 36 | 610 x 914 | 148 67 |
| MQSEC55E | 26 ¹⁵ / ₁₆ | 685 | 50 ⁷ / ₈ | 1292 | 24 x 48 | 610 x 1219 | 156 71 |
| MQSEC56E | 26 ¹⁵ / ₁₆ | 685 | 62 ⁷ / ₈ | 1597 | 24 x 60 | 610 x 1524 | 161 73 |

Note: Leveling foot on post can be adjusted up to 1" (25mm) to compensate for uneven floors.



MQSEC53VE with optional intermediate shelves

MetroMax Q Stem Caster Mobile Units — 67¹³/₁₆" (1723mm) High

| Model No. Includes four 5" (127mm) diameter swivel casters | Model No. Includes four 5" (127mm) diameter swivel casters | Actual Outside Dimensions (including bumpers and handle) | | | | Fits Shelf | | Approx. Pkd. Wt. (lbs.) (kg) |
|---|---|---|-----|--------------------------------|------|------------|------------|------------------------------------|
| | | Width (in.) (mm) | | Length (in.) (mm) | | (in.) | (mm) | |
| MQSEC53DE | MQSEC53VE | 27 ¹³ / ₁₆ | 707 | 40 ³ / ₄ | 1035 | 24 x 36 | 610 x 914 | 166 75 |
| MQSEC55DE | MQSEC55VE | 27 ¹³ / ₁₆ | 707 | 52 ³ / ₄ | 1340 | 24 x 48 | 610 x 1219 | 176 80 |
| MQSEC56DE | MQSEC56VE | 27 ¹³ / ₁₆ | 707 | 64 ³ / ₄ | 1645 | 24 x 60 | 610 x 1524 | 179 81 |

Note: DE models use four 5MPX casters.

VE models use two 5PCX and two 5PCBX casters.



Ergonomic 1/4-turn door handle

MetroMax Q Heavy-Duty Mobile Units — 68¹/₂" (1740mm) High

Mounted on an aluminum dolly with 5" (127mm) plate casters and wraparound bumpers.

| Model No. | Actual Outside Dimensions (including handle) | | | | Fits Shelf | | Approx. Pkd. Wt. (lbs.) (kg) |
|-----------|---|-----|--------------------------------|------|------------|------------|------------------------------------|
| | Width (in.) (mm) | | Length (in.) (mm) | | (in.) | (mm) | |
| MQSEC53LE | 28 ¹ / ₁₆ | 713 | 39 ¹ / ₈ | 994 | 24 x 36 | 610 x 914 | 166 75 |
| MQSEC55LE | 28 ¹ / ₁₆ | 713 | 51 ¹ / ₈ | 1299 | 24 x 48 | 610 x 1219 | 176 80 |
| MQSEC56LE | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1603 | 24 x 60 | 610 x 1524 | 179 81 |

Note: The aluminum dollies used on the LE models have two B5P and two B5PB plate casters.



Replacement Tri-Lobal Adapters for MetroMax Q Wire Security Shelves

Model No. MTLA*
Four pair per bag.

*Not compatible with MetroMax Q security units manufactured prior to May 2009. For older MetroMax Q security units, use MQ9985 wedges if replacements are needed for the wire shelves.

Optional Intermediate Shelves

| i | | i | | Q | | Nominal Width | | Nominal Length | |
|----------------------------------|-----------------------------------|----------------------------------|-----------------------------------|-------|------|---------------|------|----------------|------|
| Shelf with Grid Mat Model No. | Shelf with Solid Mat Model No. | Shelf with Grid Mat Model No. | Shelf with Solid Mat Model No. | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) |
| MX2436G | MX2436F | MQ2436G | | 24 | 610 | 36 | 914 | | |
| MX2448G | MX2448F | MQ2448G | | 24 | 610 | 48 | 1219 | | |
| MX2460G | MX2460F | MQ2460G | | 24 | 610 | 60 | 1524 | | |

qwikSLOT™ Security Units

- **Add/Remove a Shelf Feature:** Allows the unit to be quickly adapted to fit your changing storage needs.
- **Shelves can easily be adjusted in seconds.**



Interior shelves pictured are optional and must be ordered separately.

Specifications

qwikSLOT Stationary Security

| Model No. Chrome | Width | | Length | | Height | | Approx. Pkd. Wt. | |
|---------------------|--------------------------------|------|--------------------------------|------|----------------------------------|------|------------------|------|
| | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33CQ | 21 ¹ / ₂ | 546 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 138 | 63 |
| SEC35CQ | 21 ¹ / ₂ | 546 | 50 ¹ / ₂ | 1283 | 66 ¹³ / ₁₆ | 1695 | 157 | 71 |
| SEC53CQ | 27 ¹ / ₄ | 705 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 154 | 70 |
| SEC55CQ | 27 ¹ / ₄ | 705 | 50 ¹ / ₂ | 1283 | 66 ¹³ / ₁₆ | 1695 | 174 | 79 |
| SEC56CQ | 27 ¹ / ₄ | 705 | 62 ¹ / ₂ | 1587 | 66 ¹³ / ₁₆ | 1695 | 195 | 89 |

qwikSLOT Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

| Model No. Chrome | Caster Type | Width | | Length | | Height | | Approx. Pkd. Wt. | |
|---------------------|--------------|--------------------------------|------|--------------------------------|------|--------------------------------|------|------------------|------|
| | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33ECQ | (2) 5MP/5MPB | 21 ¹ / ₂ | 546 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 146 | 66 |
| SEC35ECQ | (2) 5MP/5MPB | 21 ¹ / ₂ | 546 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 165 | 75 |
| SEC53DCQ | (4) 5MP | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 162 | 74 |
| SEC55DCQ | (4) 5MP | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 182 | 83 |
| SEC56DCQ | (4) 5MP | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 203 | 92 |
| SEC53ECQ | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 162 | 74 |
| SEC55ECQ | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 182 | 83 |
| SEC56ECQ | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 203 | 92 |

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread. 5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high moisture environments.

CAUTION: Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

| Model No. Chrome | Caster Type | Width | | Length | | Height | | Approx. Pkd. Wt. | |
|---------------------|--------------|---------------------------------|------|--------------------------------|------|--------------------------------|------|------------------|------|
| | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC53LCQ | (2) 5BP/5BPB | 28 ¹ / ₁₆ | 713 | 38 ¹ / ₂ | 980 | 68 ¹ / ₂ | 1740 | 187 | 85 |
| SEC55LCQ | (2) 5BP/5BPB | 28 ¹ / ₁₆ | 713 | 50 ¹ / ₂ | 1283 | 68 ¹ / ₂ | 1740 | 210 | 95 |
| SEC56LCQ | (2) 5BP/5BPB | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1600 | 68 ¹ / ₂ | 1740 | 235 | 107 |

Intermediate Shelves for Super Erecta Shelf Security Units

| Model No. Chrome | Width | | Length | | Approx. Pkd. Wt. | |
|---------------------|-------|------|--------|------|--------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| 1836QBR* | 18 | 457 | 36 | 914 | 8 ¹ / ₂ | 3.8 |
| 1848QBR* | 18 | 457 | 48 | 1219 | 11 ¹ / ₄ | 5.0 |
| 2436QBR* | 24 | 610 | 36 | 914 | 13 | 6.0 |
| 2448QBR* | 24 | 610 | 48 | 1219 | 16 | 7.0 |
| 2460QBR | 24 | 610 | 60 | 1524 | 21 | 9.5 |

*Chrome qwikSLOT shelves available in sizes 18x36, 18x48, 24x36, and 24x48 (457x914, 457x1219, 610x914, 610x1219, and 610x1524).

**Drop Mat qwikSLOT shelves with 1" (25mm) ledge also available in sizes 24x36, 24x48 (610x914, 610x1219).


SUPER ERECTA® SHELF SECURITY MODULES

for Standard 24" (610mm) Wide Super Erecta Shelf Wire Units

- **Designed** to convert a standard 24" (610mm) wide unit into a combination of open and lockable shelving through the use of a kit.
- **Kit Includes:** Two end panels, one back panel and one door and slides. Fits between any two shelves spaced 20" (508mm) apart on any Super Erecta Shelf Wire Unit with 24" (610mm) wide shelves in 30", 48" and 60" (762, 1219 and 1524mm) lengths.
- **Versatile:** Security Modules enclose only one section of the shelving unit, leaving the rest open for conventional use. Depending upon your needs, more than one Security Module can be used on the same shelving unit.
- **Ready View of Contents:** As with Metro's Security Trucks and Stationary Security Units, the heavy-gauge, open-wire construction of the Security Module keeps its entire contents visible at all times, and makes inventory easy.
- **Convenient Door:** Has hasps for two padlocks and, when opened, slides under the upper shelf conveniently out of the way.
- **Durable Chrome-Plated Finish**

Note: Security Modules can be installed on 24" (610mm) wide Super Erecta Shelf wire shelves only.

When multiple security modules are stacked on one shelving unit, separate top and bottom shelves are still necessary for each module.

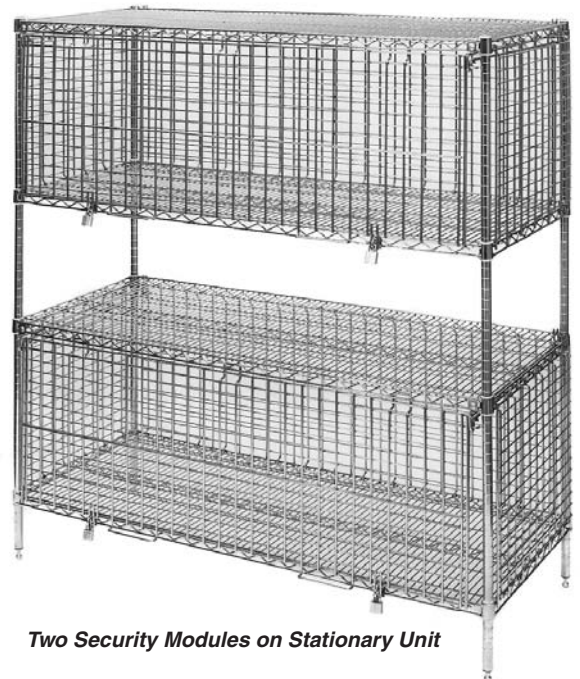

Two Security Modules on Stationary Unit

Specifications

| Model No. | Description | Width | | Length | | Height | | Approx. Pkd. Wt. | |
|------------|-----------------|-------|------|--------|------|--------|------|--------------------------------|------|
| | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SECM2430NC | Security Module | 24 | 610 | 30 | 760 | 20 | 508 | 29 ¹ / ₂ | 14 |
| SECM2448NC | Security Module | 24 | 610 | 48 | 1219 | 20 | 508 | 39 ³ / ₄ | 18 |
| SECM2460NC | Security Module | 24 | 610 | 60 | 1524 | 24 | 508 | 45 ³ / ₄ | 21 |

Note: Security Module consists of side panels, back panels and door. Posts and shelves sold separately.



SECURITY UNITS

UTILITY CARTS WITH SECURE STORAGE

Corrosion Proof Model in Stainless Steel


- **Corrosion Proof:** Features stainless steel wire and solid shelves, security module, and posts.
- **Easy to Maneuver:** Includes two 5MP swivel casters and two 5MPB swivel/brake casters.
- Solid top shelf with raised ship's edge is ideal for use as a work surface and can contain unwanted spills
- Easy assembly in minutes.

| Model No. | Width | | Length | | Height | | Cart Load Rating | | Approx. Pkd. Wt. | |
|-----------|-------|------|--------|------|--------|------|------------------|------|------------------|------|
| | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) | (lbs.) | (kg) |
| SECMLAB | 24 | 610 | 30 | 760 | 39 | 990 | 600 | 273 | 85 | 38.6 |



Other finishes and configurations are available:

Similar units can be constructed using chrome-plated components and galvanized solid Super Erecta shelves. Refer to the security modules on the previous page, and pair them with Metro SP series wire carts or your own combination of SES posts and shelves, for a customized solution. Security modules must be placed between two wire shelves.

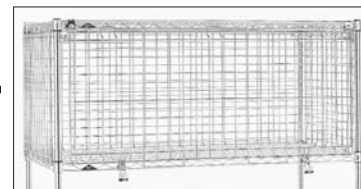

Technical Information and Recommended Usage Guidelines: Security Units

• Shelves:

- Solid shelves cannot be used as the top or bottom shelf on a security unit. For those applications requiring a solid bottom surface, Super Erecta Shelf inlays are recommended.
- It is recommended that standard Super Erecta shelves are used for the top and bottom shelves on a Super Erecta security unit.

• Security Enclosure Panels:

- Grid spacing measures 1³/₄" x 1³/₄" (44 x 44mm).
- The distance from the top of the top shelf to the top of the bottom shelf measures approximately 57" (1448mm).

• Mobile Units:

- 18" (457mm) deep security units must be used with casters that have a diameter of 5" (127mm) or less.
- Order aluminum split sleeves with c-rings for use with the top and bottom SES shelves of a mobile unit for applications that require a more rigid assembly. (9986Z for aluminum sleeves with zinc c-rings; 9986S for aluminum sleeves with stainless c-rings)

• Use with other Metro components:

- Tray slides (15SNC, 20SNC) measure approximately 23" (584mm) in height. A standard security unit can accommodate 2 levels of these tray slides.
- Metro's brake/lock plate caster system can be used with 24" (610mm) deep security mobile units featuring a dolly base.
- Solid SES shelves can be used as interior shelves on a security unit. Wire shelves must be used as the top and bottom shelves.
- A push handle is available through Custom Engineering for the 24" (610mm) deep SES security units (subject to custom order minimums). Handle is available in chrome finish (Part # CC2835N).

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

For Product Information:
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003
Middle East/Africa: +971.4.811.8286

L02-086A
Printed in U.S.A. Rev. 7/09

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2009 InterMetro Industries Corp.