



DEEP WELL HORIZONTAL BOTTLE COOLER


PRO-LINE™ 80" - 33 CASE

- Designed by beer-industry experts for performance and value.
- Commercial grade construction – built to last.
- Raised glass rail on top creates convenient storage area.
- Free flow refrigeration system ensures "ice cold" products.



MDW79

Black

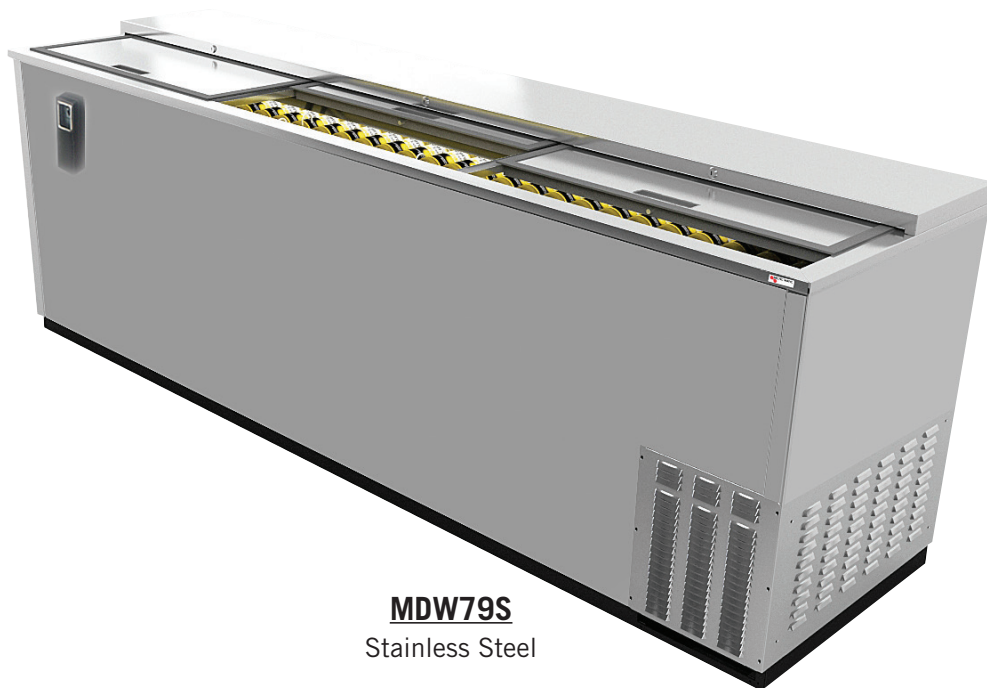

MDW79S

Stainless Steel



Listed by Edison Testing Laboratories.
Conforms to UL & NSF Standards.

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ 80" - 33 CASE

Job Number: _____ Location: _____


Part No.	Finish	Lids	Shipping Weight
☐ MDW79	Black	3	177 kg 390 lbs
☐ MDW79S	Stainless Steel	3	177 kg 390 lbs

Operating Performance

Capacity	45.5 cases (12 oz can) 33.5 cases (12 oz bottle)	Running Amps	2.0
Dividers	7	Voltage	115/60/1
Lid Locks	Standard	Plug Type	NEMA-5-15R
Interior Lights	Standard	Cord Length	8'
Cap Opener/Catcher	Standard	Refrigerant	R290
Compressor HP	1/4	Charge oz	4.9
		Working High/Low Pressure	300 psig / 150 psig

Exterior	All Models: 18 gauge stainless steel top with riased glass rails. Black Models: Front, sides, and back and doors black vinyl over steel. S/S Models: Front, sides, back and doors are s/s.
Interior	Durable galvanized steel. NSF approved for pre-packaged and bottle products.
Ventilation	Front and side ventilation
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 1-1/2" top, walls and floor
Accessories	Castors or 6" fixed legs (order separately)

Dimensions

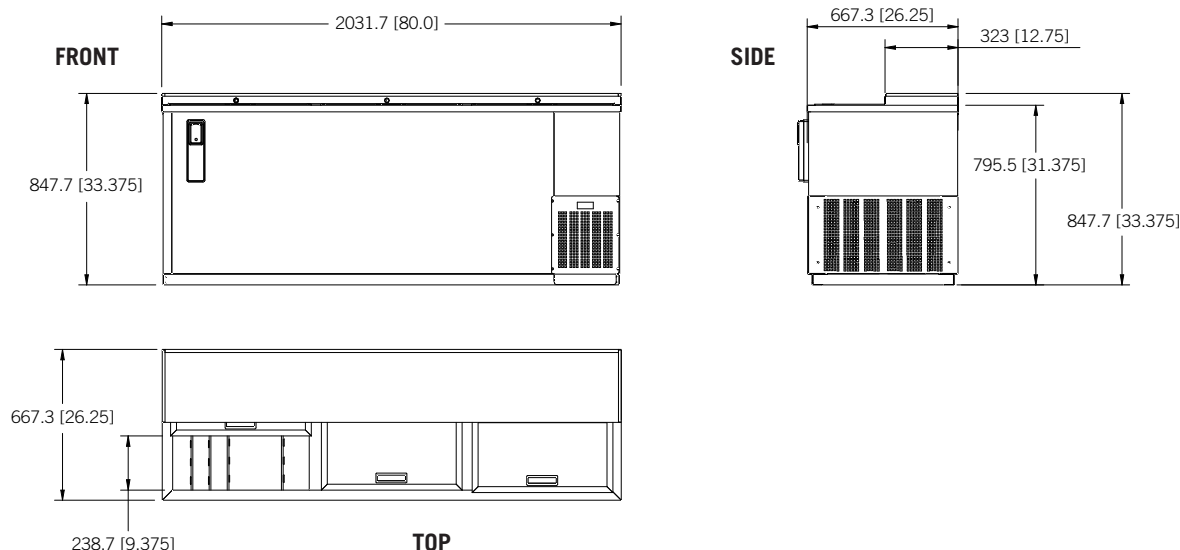

 **MICRO MATIC**
Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast
2386 Simon Ct.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466