



SERVING LINES

FIBERGLASS HOT FOOD WELL MODELS RANFG HTD

Mobile, heated display pan serving station. 16 gauge stainless steel top with locking device designed to work with all other Ranserve equipment. One-piece fiberglass body, available with enclosed base, open storage or heated storage base. Provided with 4 swivel casters (2 locking). Individual thermostatically controlled 12" x 20" die-stamped hot food wells with drains manifolded to common 1" drain and valve provided. Meets NSF Std. #4 for product holding.

SHORT FORM SPEC: Electric heated display pan serving station. 16 gauge stainless steel top with locking device, one-piece fiberglass body provided with 4 swivel casters (2 locking). 1-piece top with individual thermostatically controlled die-stamped wells with drains manifolded to common 1" drain with valve.

AVAILABLE MODELS:

- | | |
|--------------------------|-----------------------|
| CLOSED BASE (NO STORAGE) | HEATED BASE (STORAGE) |
| RANFG HTD-2 | RANFG HTD-3B |
| RANFG HTD-3 | RANFG HTD-4B |
| RANFG HTD-4 | RANFG HTD-5B |
| RANFG HTD-5 | RANFG HTD-6B |
| RANFG HTD-6 | |
| OPEN BASE (STORAGE) | |
| RANFG HTD-2S | |
| RANFG HTD-3S | |
| RANFG HTD-4S | |
| RANFG HTD-5S | |
| RANFG HTD-6S | |

AVAILABLE FIBERGLASS COLORS:



STANDARD FEATURES:

- Individual thermostatic controls for precise food temperatures
- Meets NSF Std. #4 for product holding
- All stainless steel top with die-stamped raised sanitary rim pan openings
- Drain and gate valve provided
- Swivel casters - (2) locking
- Concealed locking mechanism with easy to use spring activated catch
- One-piece fiberglass body
- 8' cordset

CABINET CONSTRUCTION: Body to be one-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers. Hinged louvered door provides access to drain valve. Removable control panel for easy access to heating elements. Unit to be equipped with 4 swivel casters, (2) locking. Open storage model (HTD-S) includes stainless steel undershelf constructed of 22 gauge stainless steel with integrally welded steel under-bracing. Heated base models (HTD-B) are NSF approved for food storage. Thermostatically controlled, electrically heated base with hinged door(s) and chrome shelf (1 per door).

TOP CONSTRUCTION: Top to be one piece of die-formed 16 gauge stainless steel with 1-1/2", 90° nosing on all sides. Unit fitted with complement of 12" x 20" top openings with raised die-stamped perimeters.

FOOD WELLS: Electrically heated food wells are independently controlled by thermostatic controls and include drains manifolded to common valve. Each well provided with on/off indicator light mounted into removable control panel allowing easy access to heating element boxes. 8' cordset provided for voltage specified.

ORIGIN OF MANUFACTURE:
Designed and manufactured in the United States.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400





Model RANFG HTD-4 shown with RAN INV60 trayslide.

OPTIONS/ACCESSORIES:



- Canopy
- Overshelves
- Trayslides
- Corian top
- 14 gauge top
- Graphics
- Breath Guards
- Elementary school height (not available on "B" series)
- Electrical Distribution System
- Hinged doors ("S" series only)
- Door lock
- Reduced wattage elements







RANFG HTD-2





RANFG HTD-3/3S/3B







RANFG HTD-4/4S/4B

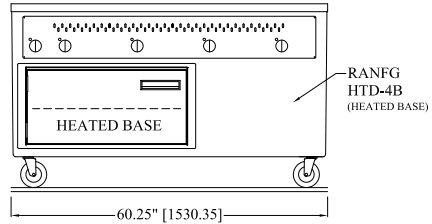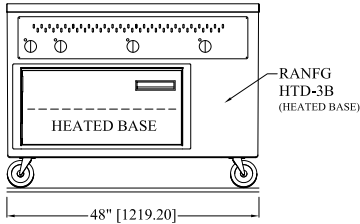


RANFG HTD-5/5S/5B

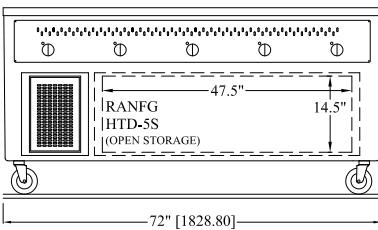
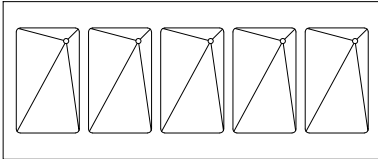


RANFG HTD-6/6S/6B

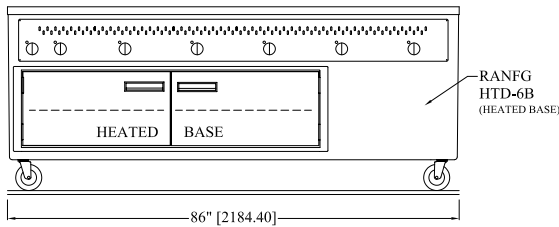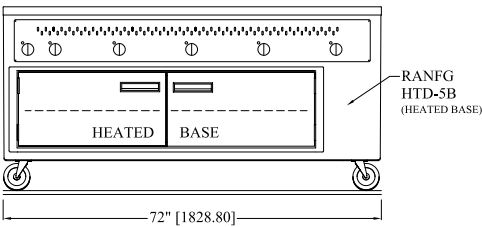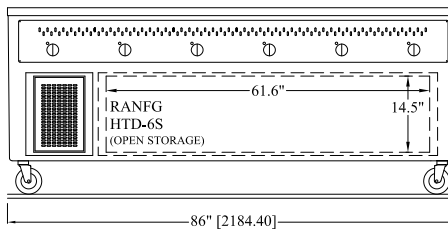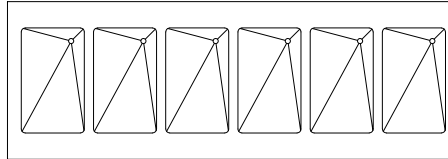




RANFG HTDx/S
(DRAIN VALVE LOCATED IN HOUSING
9' CORD/PLUG EXTENDED OUT BOTTOM OF UNIT)



RANFG HTDxB
(DRAIN VALVE LOCATED IN HOUSING
9' CORD/PLUG EXTENDED OUT BOTTOM OF UNIT)



MODELS	L	D	H	No. of Wells	120V				208V				240V		Ship Wt.
					500W		1100W		865W		1100W		Amps*	NEMA	
					Amps*	NEMA	Amps*	NEMA	Amps*	NEMA	Amps*	NEMA			
CLOSED BASE/OPEN BASE															
RANFG HTD-2	30"	30"	35.5"	2	8.33	5-15P	18.40	5-30P	8.32	6-15P	10.58	6-15P	9.17	6-15P	275
RANFG HTD-3/S	48"	30"	35.5"	3	12.50	5-20P	27.5	5-50P	12.48	6-20P	15.87	6-20P	13.75	6-20P	315
RANFG HTD-4/S	60.25"	30"	35.5"	4	16.67	5-30P	36.67	5-50P	16.63	6-30P	21.15	6-30P	18.33	6-30P	360
RANFG HTD-5/S	72"	30"	35.5"	5	20.83	5-30P	N/A	N/A	20.79	6-30P	26.44	6-50P	22.92	6-30P	425
RANFG HTD-6/S	86"	30"	35.5"	6	25	5-50P	N/A	N/A	24.95	6-50P	31.73	6-50P	27.5	6-50P	490
HEATED STORAGE BASE															
RANFG HTD-3B	48"	30"	35.5"	3	18.75	5-30P	33.75	5-50P	16.45	6-30P	19.84	6-30P	17.92	6-30P	330
RANFG HTD-4B	60.25"	30"	35.5"	4	22.92	5-50P	N/A	N/A	20.6	6-30P	25.12	6-50P	22.5	6-30P	375
RANFG HTD-5B	72"	30"	35.5"	5	27.08	5-50P	N/A	N/A	24.76	6-50P	30.41	6-50P	27.09	6-50P	450
RANFG HTD-6B	86"	30"	35.5"	6	31.25	5-50P	N/A	N/A	29.92	6-50P	35.7	6-50P	31.67	6-50P	515

*Note: Amperage for base unit only. Any accessory heat lamp or display illumination loads must be added to the total amperage.