



Item: _____
 Quantity: _____
 Project: _____

72" Electric Restaurant Range

Royal Series

Models: ☐ RRE-12 ☐ RRE-10GT12 ☐ RRE-8GT24 ☐ RRE-6GT36
☐ RRE-4GT48 ☐ RRE-2GT60 ☐ RRE-GT72



RRE-12

Voltage: ☐ 208V ☐ 240V
 Phase: ☐ 1 Phase ☐ 3 Phase

Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven - total 5 KW with low wattage "broiler" element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- Standard with thermostat every 12"


Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ One Convection Oven and one Standard Oven
 Convection oven: ☐ Left ☐ Right add suffix "-C"
- ☐ Two 26½" Convection Ovens - add suffix "-CC"
- ☐ One 26½" Convection Oven - add suffix "-126C"
 Cabinet space: ☐ Left ☐ Right
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

72" Electric Restaurant Range

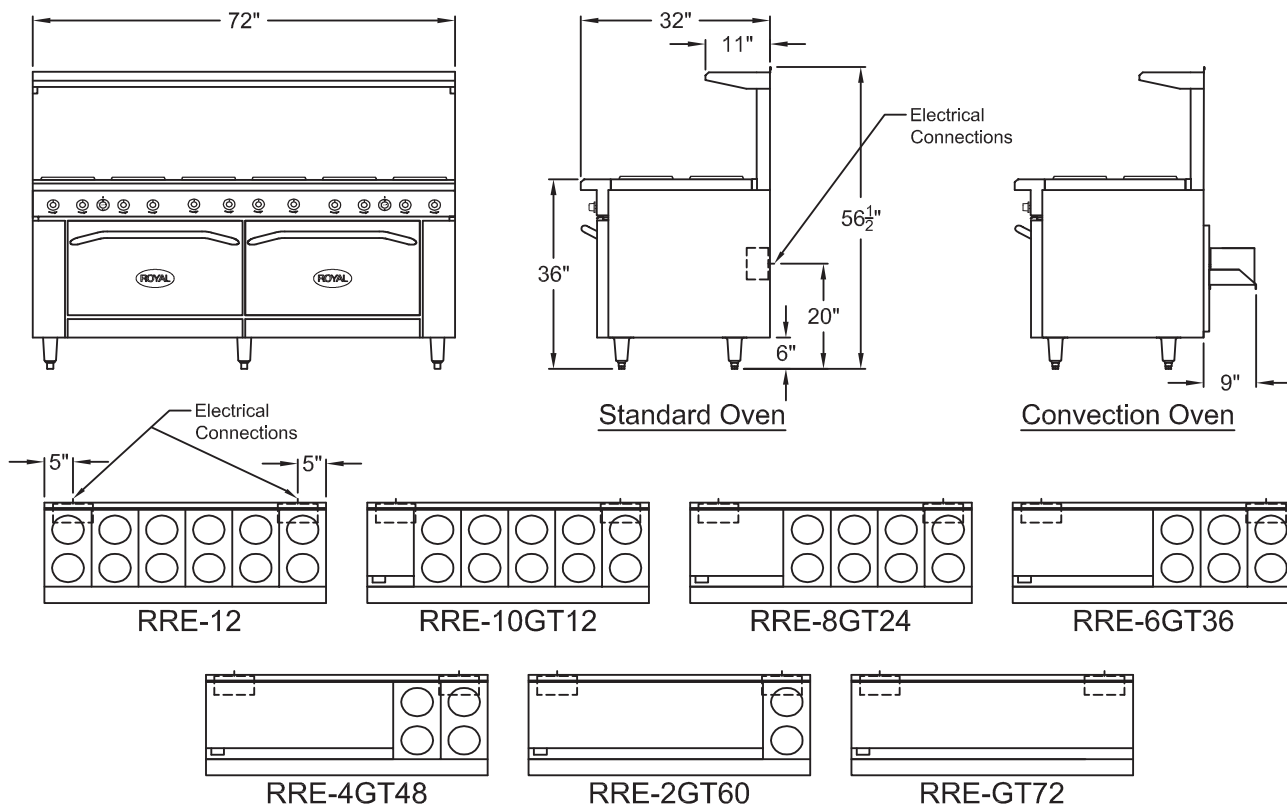

Model	Total KW	Voltage	A M P S					
			1 Phase		3 Phase			
			L1	L3	L1	L2	L3	Ship Wt.
RRE-12	34	208	164	164	96	104	96	1205
		240	144	144	82	92	82	
RRE-10GT12	33.4	208	161	161	94	98	94	1030
		240	141	141	81	86	81	
RRE-8GT24	32.8	208	158	158	92	96	92	1200
		240	138	138	79	84	79	
RRE-6GT36	32.2	208	155	155	91	95	91	1230
		240	136	136	78	83	78	
RRE-4GT48	31.6	208	152	152	89	89	89	1255
		240	133	133	77	77	77	
RRE-2GT60	31	208	149	149	87	87	87	1280
		240	130	130	75	75	75	
RRE-GT72	30.4	208	146	146	86	86	86	1350
		240	128	128	74	74	74	

72" Electric Range units have two electrical connections

For convection ovens: add 4 amps plus 75# shipping weight per convection oven

To be installed only in noncombustible surroundings. See installation instructions.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com