



Item: _____
Quantity: _____
Project: _____

Royal Series

Models: ☐ RRE-8 ☐ RRE-6GT12 ☐ RRE-4GT24 ☐ RRE-2GT36 ☐ RRE-GT48



Voltage: ☐ 208V ☐ 240V
Phase: ☐ 1 Phase ☐ 3 Phase

Options and Accessories

Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Two 20" wide ovens
- Accommodates 18" x 26" full size sheet pan
- Oven with 4 KW heating element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- GT Griddle Series - standard with thermostat every 12"


- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ One 26½" Convection Oven - add suffix "-126C"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 26½" W Oven - add suffix "-126"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 20" W Oven - add suffix "-120"
Cabinet space: ☐ Left ☐ Right
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Additional oven racks
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

48" Electric Restaurant Range

48" Electric Restaurant Range

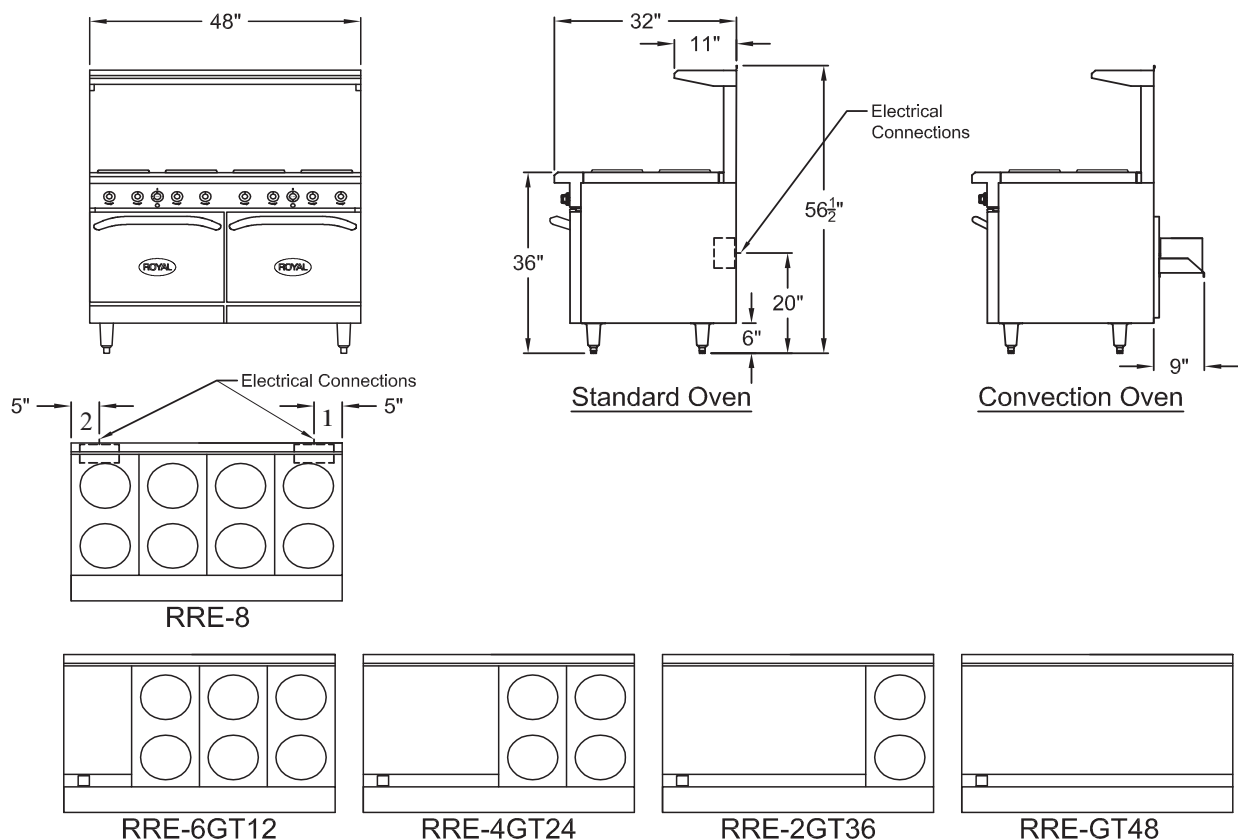

Model	Total KW	Voltage	MAX AMPS				
			1 Phase		3 Phase		
			Inlet 1	Inlet 2	Inlet 1	Inlet 2	
RRE-8	24	208	58	58	34	34	800
		240	50	50	29	29	
RRE-6GT12	23.4	208	58	55	34	32	820
		240	48	50	29	28	
RRE-4GT24	22.8	208	52	52	34	30	830
		240	48	48	28	28	
RRE-2GT36	22.2	208	55	52	32	30	850
		240	48	45	28	26	
RRE-GT48	21.6	208	52	52	30	30	870
		240	45	45	26	26	

48" Electric Range units have two electrical connections.

To be installed only in noncombustible surroundings. See installation instructions.

For convection ovens: add 4 amps plus 75# shipping weight.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com