
# SANDWICH UNIT REFRIGERATOR

## Model: SW48N12-FB

Natural Refrigerant R-290 Model

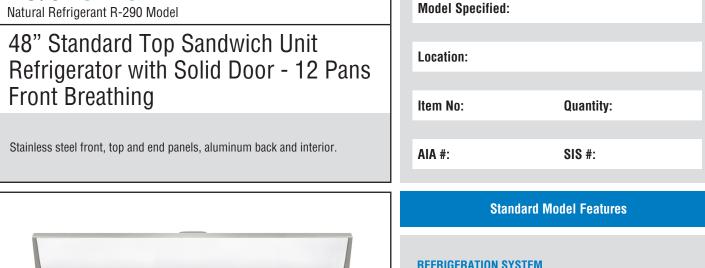

#### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Crumb catcher
Stainless steel back	Rear-mounted cutting board
Overshelves (single or double)	Composite cutting board
Add'l epoxy-coated steel shelves	Flat insulated night cover
Stainless steel shelves	Vision panel lid
Door locks	Modified pan openings

Consult factory for other model configurations, options and accessories.

#### REFRIGERATION SYSTEM

**Project Name:** 

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant1

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

Expansion valve system

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

12" deep, full length nylon cutting board

Insulated lid

Completely enclosed, vented and removable case back

3 3/4" casters

#### **MODEL FEATURES**

(12) 1/6 size recessed pans, 4" deep

Removable interior tub below pans

Electronic controller w/digital display & hi-low alarm

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space. For proper operation, the area under and in front of the cabinet must not be obstructed in any way.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

### **Model Specifications**

DIMENSIONAL D	AT	F
Not Conneity (ou	fŧ	١

Net Capacity (cu. ft.)	13.4 (379 cu l)
1/6 Size Pans (4" deep)	12

Width, Overall (in.) 48 (1219 mm) Depth, Overall (in.)

32 3/16 (818 mm) (incl. handles & bumpers)

Depth, Cutting Board (in.) 12 (305 mm) Height, Overall (in.) (incl. 3 3/4" casters) 41 (1041 mm)

Shelf Area (sq. ft.) 6.8 (.6 sq m)

No. of Shelves 2 No. of Doors 2

Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm)

Interior Width (in.) 44 (1118 mm)

#### REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU/Hr)*	1940

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	4.5 (3.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Weight (lbs.)	270 (122 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	56 (1422 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.








# © Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

### **Model Plan Views**

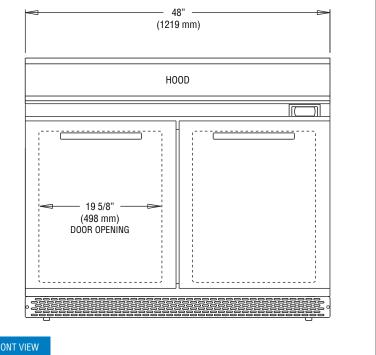

**FRONT VIEW** 

