MANTEGNA 350 VCS TOP - 14"

Straight-feed slicer, for fresh meat and bolas



MANTEGNA 350 VCS TOP

- 14" high-quality, heavy-duty straight-feed fresh meat slicers
- Specially designed double-feed carriage to support fresh meat
- Great for meat depts, butcheries and carnicerias. Perfect for bola (bistecs, arranchera and milanesa)
- The inner blade cover ensure a perfectly aligned cut. No waste when cutting same product at different times.
- The TOP version provides even higher durability in terms of reduced maintenance costs with:
  - all knobs, handles, dials and feet in aluminum
  - fully sealed and waterproof IP 67 controls, with stainless steel ON/OFF buttons
  - no volt release prevents inadvertent reactivation after a power outage
  - complete stainless steel drive shaft assembly

Features

Technical
- The special hopper allows you to slice raw meat (bolas).
- The sharpener assembly is made entirely from aluminum, no plastic that may break with heavy use.
- The tie rod assembly and all screws are made of stainless steel for longer life.
- The slide shaft is made of ground, chromed steel for a smoother operation.
- The high-quality bushings and ball bearings are self-lubricating.
- The dial thickness control cam system allows for an always precise cut.

Safety
- A safety cover is placed under the motor and the electrical components.
- The hopper features an exclusive heavy duty plastic protection to keep operator's hand at a safe distance from the blade while operating slicer.

Sanitary
- Easy to clean aluminum alloy construction does not crack or stain.
- The screws are stainless steel and resist wear and oxidation.
- The carriage and the blade cover are quickly removable without tools.

Specifications

Operation:	Straight Feed.
Construction:	Polished, anodized aluminum alloy.
Knife:	14" (350 mm), one piece, chromium plated 100Cr6 forged carbon steel blade.
Sharpener:	Built-in, removable, two stone dual action.
Slice thickness:	Infinitely variable up to $1^{3/16}$"
Motor:	0.5 Hp (410 W), belt driven, fan cooled.
Electrical:	110-120V AC, 60Hz, 2A (220V, 50Hz available on request).
Plug and Cord:	Attached, flexible, 3 wire SJTO AWG 18, 6'4" long, NEMA 5-15 P
Controls:	ON/OFF stainless steel keypad, IP 67 waterproof protection. No voltage release.


Certified to UL Standard 763
Certified to CSA Standard C22.2




All knobs, handles, dials and feet in aluminum





Double-feed carriage specially designed for fresh meat
Removable product pusher

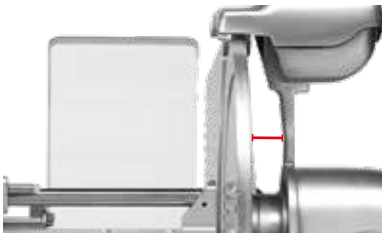


Increased gap between blade and machine body

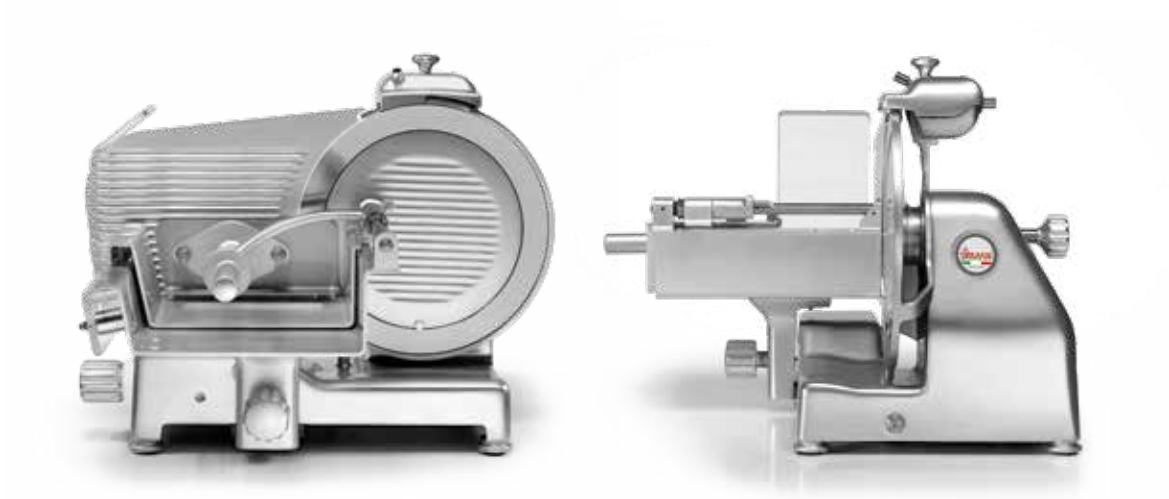

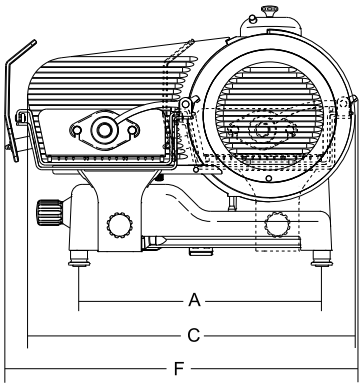

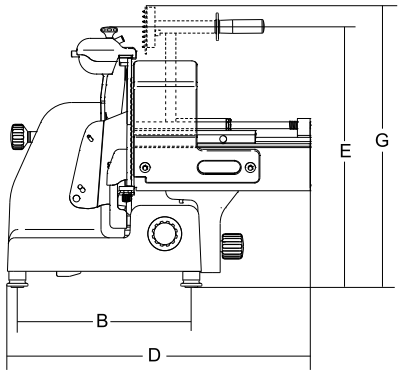

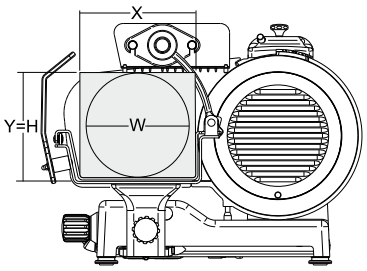

	Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Hopper	A	B	C	D	E	F	G	X	Y	H	W	Net weight	Shipping	Gross weight
	mm/inch	*watt/Hp*	*inch.*	*rpm*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*inch.*	*lbs.*	*inch.*	*lbs.*
Mantegna 350 VCS TOP	350/14″	410-0,55	1 3/16″	216	12 3/16″	13 3/8″ x 9 13/16″	18 7/16″	13 5/16″	26″	26 15/16″	20 7/8″	28 3/8″	22 1/16″	10″	9 5/8″	9 5/8″	9 5/8″	84	33" x 34" x 33"	142