

## Platinum

### Standard Features

- Standard (2) years limited parts and labor warranty (reference <http://www.southbendnc.com/service.html> for limited warranty details).
- 32" wide sectional range with a standard-oven base, convection-oven base, cabinet base, or as a modular unit (for mounting on countertop, refrigerated or freezer base)
- 9-1/4" deep front rail
- Stainless steel front and sides
- Fully insulated lining and burner box
- 1-1/4" front gas manifold and 1" rear gas connection
- 5" high stainless steel flue riser
- Free battery-design assistance

### 16" Open Top Features

- Two Signature Pyromax 45,000 BTU NAT (45,000 BTU LP) patented clog-free burners
- Removable, welded steel top grates
- Removable drip tray

### 16" Hot Top Features

- Two 20,000 BTU NAT (18,000 BTU LP) burners with one high/low control knobs
- Battery spark ignition
- Removable steel plates with 700°F surface temperature on high setting


### 16" Charbroiler Features

- Two 20,000 BTU NAT (18,000 BTU LP) burners with one high/low control knobs
- Removable cast iron grates with adjustable front-to-back slope that flip over for either 1/8" or 1/4" grid width
- 600°F even surface temperature on high setting
- Stainless steel burner radiants
- Removable drip tray


### 16" Griddle Features

- Two 20,000 BTU NAT (18,000 BTU LP) burners with one control knob
- Manual "G", or Thermostatic "T" controls available
- "Insta-On" thermostatic control of griddle surface temperature in the range 180°F to 400°F
- Battery spark ignition
- 1" thick griddle plate with side and rear splashes
- Removable stainless steel grease drawer


**\*\*MANUAL GRIDDLES DO NOT ALLOW SPECIFIC TEMPERATURE OPERATION\*\***




**P32-XH**  
(2) 45,000BTU Pyromax open top burners and 16" Hot Top




**P32-XH-RE**  
(2) 45,000BTU Pyromax open top burners and 16" Hot Top in rear




**P32-XG / P32-XT**  
(2) 45,000BTU Pyromax open top burners and 16" Griddle




**P32-XC**  
(2) 45,000BTU Pyromax open top burners and 16" Charbroiler



**P32-HC**  
16" Hot Top and 16" Charboiler




**P32-HG / P32-HT**  
16" Hot Top and 16" Griddle



**P32-GC / P32-TC**  
16" Griddle and 16" Charbroiler

\*All configurations available with the following oven base options:

- N - none
- C - cabinet
- D - standard oven
- A - convection oven

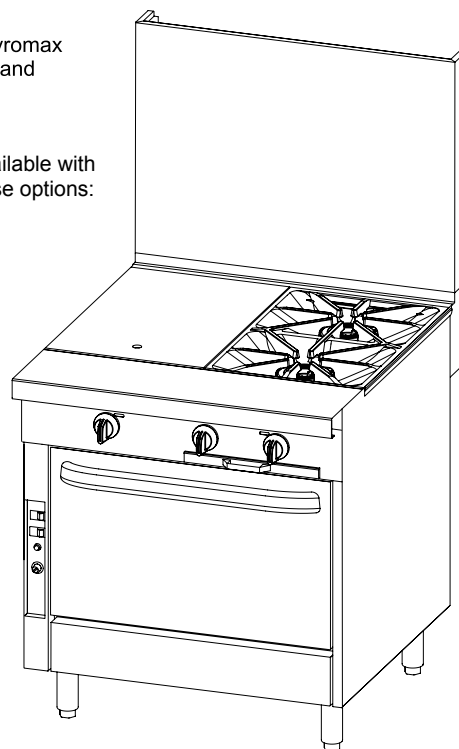

Model P32A-HX with optional 24" flue riser and optional, removable cast iron grate

### Standard Features of Oven-Base Models

**Exterior Finish:** Front, sides, rear and exterior bottom constructed of #3 polished 430 and 304 stainless steel.

**Front Rail:** 9-1/4" deep front rail.

**Flue Riser:** 5" high stainless steel flue riser

**Battery:** Unit can be in any position in a battery. If the unit is at the end of the battery, the end side will be solid (rather than have a coverplate over the end of the front manifold).

**Legs:** 6" stainless steel adjustable legs standard.


**Model 32D:** 45,000 BTU NAT (45,000 BTU LP) oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior, measuring 14" high x 26" wide x 26.5" deep. Two racks with five-position side rails.

**Model 32A:** 45,000 BTU NAT (45,000 BTU LP) convection oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior, measuring 14" high x 26" wide x 24" deep. Three racks with five-position side rails. Two-speed, 1/2 hp blower motor.

**Model 32C:** Stainless steel cabinet base with two removable doors that open from the center.



Models: ☐ P32-XH ☐ P32-XH-RE ☐ P32-XG/T ☐ P32-XC ☐ P32-HC ☐ P32-HG/T ☐ P32-G/TC

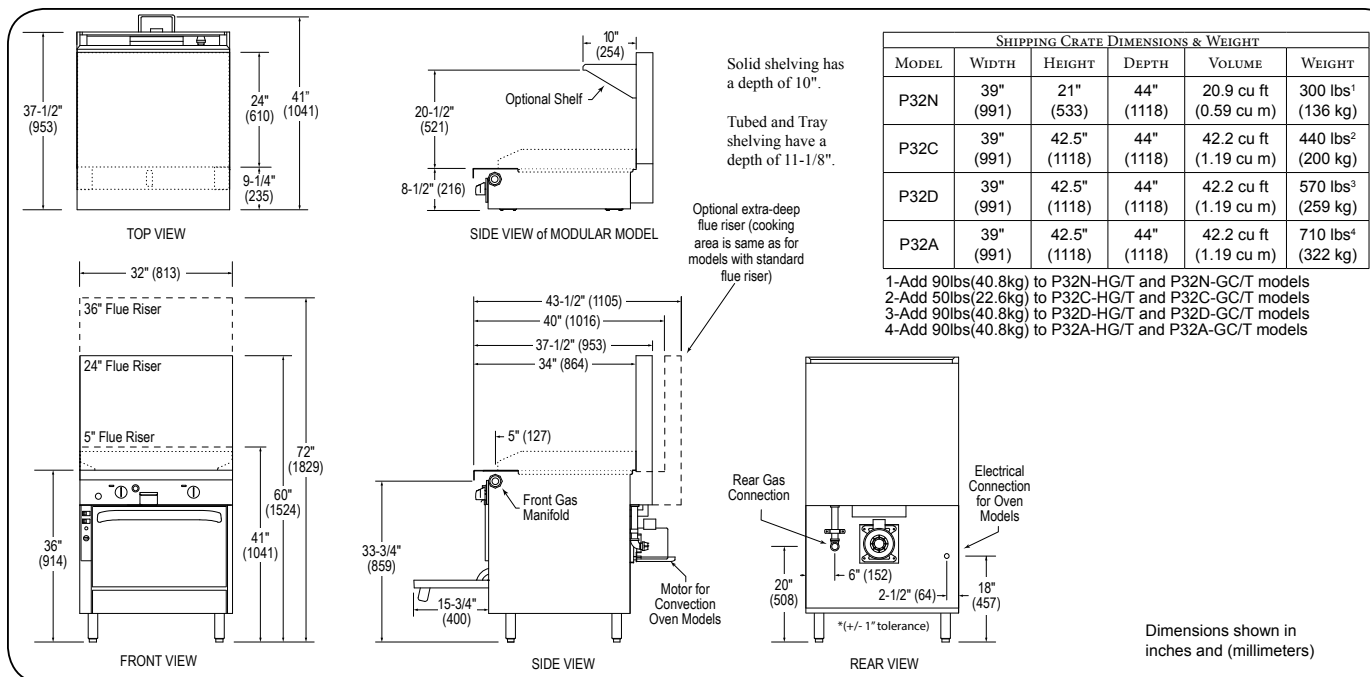

### UTILITY INFORMATION

| MODEL     | DESCRIPTION                            | OPEN TOP BTU NAT (LP) | HOT TOP BTU NAT (LP) | GRIDDLE BTU NAT (LP) | CHARBROILER BTU NAT (LP) | TOTAL BTU NAT (LP) | ADD TO TOTAL IF USING OVEN BASE STANDARD OR CONVECTION NAT(LP) |
|-----------|----------------------------------------|-----------------------|----------------------|----------------------|--------------------------|--------------------|----------------------------------------------------------------|
| P32-XH    | (2) Open Top Burners / 16" Hot Top     | 90K(90K)              | 40K(36K)             | -                    | -                        | 130K(120K)         | 45,000 (45,000)                                                |
| P32-XH-RE | (2) Open Top Burners / Rear Hot Top    | 90K(90K)              | 40K(36K)             | -                    | -                        | 130K(120K)         |                                                                |
| P32-XG/T  | (2) Open top Burners / 16" Griddle     | 90K(90K)              | -                    | 40K(36K)             | -                        | 130K(120K)         |                                                                |
| P32-XC    | (2) Open Top Burners / 16" Charbroiler | 90K(90K)              | -                    | -                    | 40K(36K)                 | 130K(120K)         |                                                                |
| P32-HC    | 16" Hot Top / 16" Charbroiler          | -                     | 40K(36K)             | -                    | 40K(36K)                 | 80K(72K)           |                                                                |
| P32-HG/T  | 16" Hot Top / 16" Griddle              | -                     | 40K(36K)             | 40K(36K)             | -                        | 80K(72K)           |                                                                |
| P32-G/TC  | 16" Griddle / 16" Charbroiler          | -                     | -                    | 40K(36K)             | 40K(36K)                 | 80K(72K)           |                                                                |

**Note 1:** Specify left or right configuration. For griddle top specify "G" for manual, or "T" for thermostatic controls

**GAS:** Each unit has a 1-1/4" front manifold that couples to the adjacent sectional unit(s), and a 1" rear gas connection with a male NPT connector. Minimum gas supply pressure is 7" W.C. for natural gas and 11" W.C. for propane. All sectional units require a regulated gas supply (a pressure regulator must be ordered separately). If using a flexible-hose gas connection, the inside diameter of the hose must not be smaller than the connector on the unit and must comply with ANSI Z21.69, providing an adequate means of restraint to prevent undue strain on the gas connection.

### MISCELLANEOUS

- If casters are used with a flexible-hose gas connection, a restraining device should be used to prevent undue strain on the hose.
- Minimum clearance from combustible construction is 10" on sides and 12" on rear for griddles and hot tops, pyromax tops need 13" on sides and 6" on rear. Charbroiler units are for use in noncombustible locations ONLY.
- Clearance to noncombustible construction is 0" for all tops and bases (except there must be 2" clearance behind the blower motor of convection-oven models).
- Installation under a vented hood is recommended.
- Check local codes for fire and sanitary regulations.

**NOTICE:** Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

### OPTIONS and ACCESSORIES

- ☐ External pressure regulator
- ☐ Front rail options:
  - ☐ Cutouts in front rail for sauce pans
  - ☐ 7-1/4" deep front rail (to match old style sectional)
  - ☐ Square belly bar mounted on 7-1/4" deep front rail
- ☐ Casters (front two casters lock)
- ☐ Cable restraint kit (to restrict movement when on casters)
- ☐ Stainless steel oven interior
- ☐ 24" or 36" high flue riser
- ☐ Shelves on flue riser (one on 24" flue riser, one or two on 36" flue riser, 10" deep, shelves not available above charbroilers)
- ☐ Tray or tubular shelving (shelves not available above charbroilers, 12" deep)
- ☐ Open-frame base with casters for battery
- ☐ Extra-deep rear-extending flue riser
- ☐ Salamander or cheesemelter mounted on 36" high flue riser
- ☐ Removable shelf inside cabinet
- ☐ Grooved griddle surface (Griddle Only)
- ☐ Chrome griddle surface (Griddle Only)
- ☐ Plated fish grids (Charbroiler only)
- ☐ Additional top configurations available. Contact factory for details
- ☐ Removable, cast iron grate tops
- ☐ Battery spark ignition for open tops
- ☐ Electronic oven pilot ignition (no charge)

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**



1100 Old Honeycutt Road, Fuquay-Varina, NC 27526  
(919) 762-1000 www.southbendnc.com