

ITEM NO:	
PROJECT:	
DATE:	

Non-Refrigerated Self-Service Case 32"D



	Lengths include end panels
□ B3632D	36-5/8"L x 32-1/4"D x 82-1/2"H
□ B4732D	47-5/8"L x 32-1/4"D x 82-1/2"H
□ B5932D	59-5/8"L x 32-1/4"D x 82-1/2"H
□ B7132D	71-5/8"L x 32-1/4"D x 82-1/2"H
□ B8832D	88-3/8"L x 32-1/4"D x 82-1/2"H

STANDARD FEATURES

- Flat upper front panel & header
- LED top light(s)
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- Solid back panel, black

Features	Standard	Options
EXTERIOR COLOR	□ Laminated (non-premium) Confirm	□ Laminated (premium) Confirm pattern/grain direction
	pattern/grain direction	□ Stainless steel (includes lower front panel)
INTERIOR COLOR	□ Black	□ Stainless steel
LOWER FRONT PANEL COLOR	□ Painted - Black	□ Stainless steel (w/stainless ext. only)
BASE	□ Casters w/ levelers	□ Levelers (only)
		□ Seismic levelers (Q4695)
END PANEL LEFT	□ Full end panel w/mirror interior (metal	□ Cutaway end panel (metal edge matches interior
	edge matches interior color)	color)
		□ No end panel (for same case to case connect)
END PANEL RIGHT	□ Full end panel w/mirror interior (metal	□ Cutaway end panel (metal edge matches interior
	edge matches interior color)	color)
		□ No end panel (for same case to case connect)
SHELVING	□ Metal shelves, non-lighted	□ Metal shelves, lighted (LED)
ELECTRICAL CONNECT	□ 12" straight blade power cord	□ 12" locking power cord
MISCELLANEOUS		□ Roll-down security cover, locking (Requires two end
		panels (full or cutaway) per case)
		□ Second year parts & labor warranty
ACCESSORIES		□ Price tag moulding (matches interior color)





Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Intended Product To Be Displayed Integrated Prod Temp ° F Ambient ΑII Packaged non-refrigerated products

PLAN VIEW

SIDE VIEW

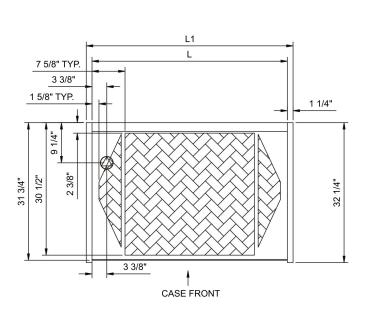

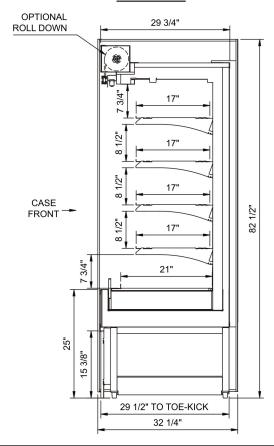

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). REMOTE FLOOR SINK & UTILITIES ACCESS AREA. ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REFRIGERATION LINE CONNECTION.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications															
Model	L"	L1"	L2"		System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	втин	Est Wt
B3632D	N/A	36.63	.00	Ambient	Circuit #1	110-120	1	60	0.81	85	2+G	5-15P or L5-15P	N/A	N/A	700
B4732D	N/A	47.63	.00	Ambient	Circuit #1	110-120	1	60	1.18	125	2+G	5-15P or L5-15P	N/A	N/A	800
B5932D	N/A	59.63	.00	Ambient	Circuit #1	110-120	1	60	1.52	160	2+G	5-15P or L5-15P	N/A	N/A	950
B7132D	N/A	71.63	.00	Ambient	Circuit #1	110-120	1	60	1.68	200	2+G	5-15P or L5-15P	N/A	N/A	1,100
B8832D	N/A	88.38	.00	Ambient	Circuit #1	110-120	1	60	1.94	250	2+G	5-15P or L5-15P	N/A	N/A	1,200

*** Does not include electric defrost on freezer models

Regulatory	Approvals:
i togulatol y	Appi o vais.

All Models ETL Listed to UL 65 ETL Sanitation to NSF 2





Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.