


- **CO33R** 36-1/4"L x 32-3/8"D x 33-3/4"H
- **CO43R** 47-1/4"L x 32-3/8"D x 33-3/4"H
- **CO53R** 59-1/4"L x 32-3/8"D x 33-3/4"H
- **CO63R** 71-1/4"L x 32-3/8"D x 33-3/4"H

Shown w/ optional risers

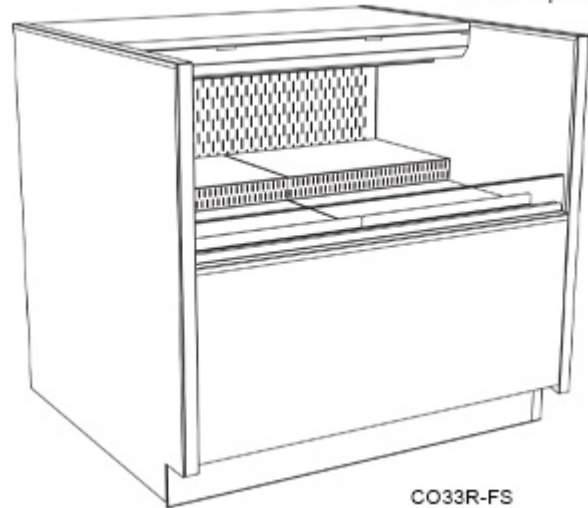

Included


- NOTE: ADD SUFFIX TO MODEL # LISTED ABOVE BASED ON MODEL CONFIGURATION CHOSEN BELOW
- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (rear access)
- Blue Fin coated coil
- Casters (non-locking) w/ levelers
- Compressor air rear intake, front discharge at toe kick. Front and rear panels cannot be blocked. Must remain 4" from wall
- Condensate pan (self-contained refrig. only)
- Integrated average product temperature of 40°F or less
- LED 3500K top light(s)
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty

Specify	Standard Features	Additional Options
MODEL CONFIGURATION	<ul style="list-style-type: none"> • Freestanding (-FS) Counter ht. 33-3/4"H; freestanding unit w/2 end panels. Top & front panels positioned between end panels 	<ul style="list-style-type: none"> • Counter height (-CH) Counter ht. 33-3/4"H; Top & front panels extended over end panels to blend w/adj. counters (supplied by others) • Undercounter height (-UC) Undercounter ht. 32-3/4"H; front panel extends over end panels to blend w/adj. counters (supplied by others). Counter surface (supplied by others) extends over top of unit
EXTERIOR COLOR	<ul style="list-style-type: none"> • Laminated (non-premium) Confirm pattern/grain direction 	<ul style="list-style-type: none"> • Laminated (premium) Confirm pattern/grain direction • Stainless steel exterior
INTERIOR COLOR	<ul style="list-style-type: none"> • Black interior 	<ul style="list-style-type: none"> • Stainless steel interior
END PANEL LEFT	<ul style="list-style-type: none"> • Square full end panel w/mirror interior (metal edge matches interior color) 	<ul style="list-style-type: none"> • Curved end panel w/mirror (-FS model only) • No end panel w/ synchronized defrost
END PANEL RIGHT	<ul style="list-style-type: none"> • Square full end panel w/mirror interior (metal edge matches interior color) 	<ul style="list-style-type: none"> • Curved end panel w/mirror (-FS model only) • No end panel w/ synchronized defrost
EXTERIOR BACK PANEL	<ul style="list-style-type: none"> • Solid back panel, black 	<ul style="list-style-type: none"> • Solid back panel, stainless steel • Solid rear flip-down door(s) w/ lock (rear access only)
ELECTRICAL CONNECT	<ul style="list-style-type: none"> • 6' Straight blade power cord (self-cont.) 	<ul style="list-style-type: none"> • 6' Locking power cord (self-cont.) • Electrical leads (remote)
REFRIGERATION	<ul style="list-style-type: none"> • Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (rear access) 	<ul style="list-style-type: none"> • Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (front access)(w/ 2"D open rear wall spacer) • Note: Remote doesn't incl Conds unit. Floor drain reqd. ¹ • Remote w/thermostat, solenoid & TXV (front access) ² • Remote w/thermostat, solenoid & TXV (rear access)
MISCELLANEOUS		<ul style="list-style-type: none"> • Remote monitoring package (n/a w/remote ref.) • Second year parts & labor warranty (excludes compressor)
ACCESSORIES		<ul style="list-style-type: none"> • 2"D Full chimney rear wall spacer (front access only) • 2"H Full depth display riser(s) for lower display • Clean Sweep® coil cleaner (n/a w/remote) • Night curtain, retractable, non-locking • Removable solid security cover, locking


Option Notes: 1 - See tech spec for remote load reqmts
2 - See tech spec for remote load reqmts

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

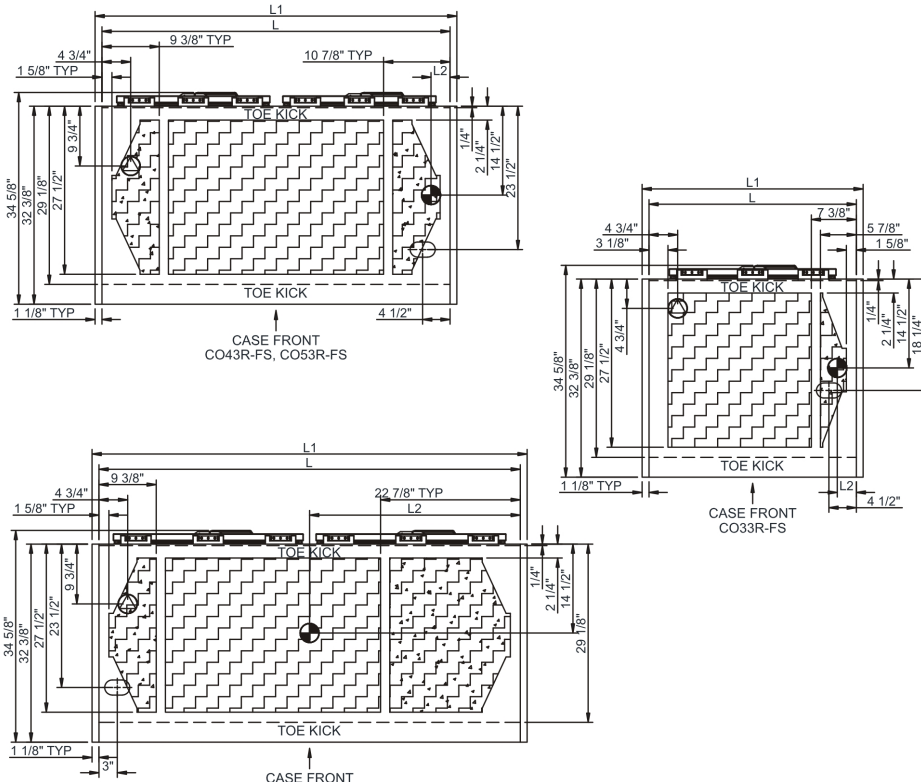

SIDE VIEW

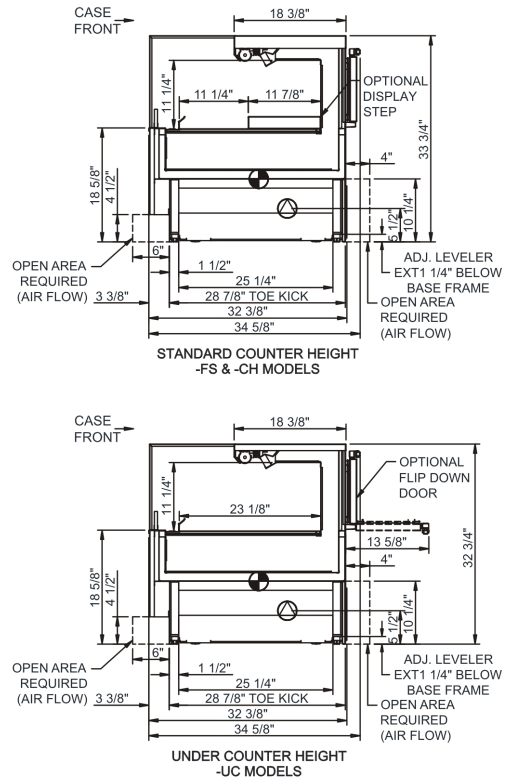

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU/H	Para. Rack RTU/H	Est Wt	
				Circuit #1	Circuit #2											
CO33R	34.00	36.25	3.13	Remote(Type I)	Circuit #1	110-120	1	60	1.12	36	2+G	Leads Multiple	20.00	1426	1320	650
				Remote(Type II)	Circuit #1	110-120	1	60	1.12	42	2+G	Leads Multiple	20.00	1706	1580	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	11.98	1,050	2+G	5-15P or L5-15P	N/A	N/A	N/A	
CO43R	45.00	47.25	3.13	Remote(Type I)	Circuit #1	110-120	1	60	1.14	36	2+G	Leads Multiple	20.00	1620	1500	700
				Remote(Type I)	Circuit #1	110-120	1	60	1.14	40	2+G	Leads Multiple	20.00	1620	1500	
				Remote(Type II)	Circuit #1	110-120	1	60	1.14	36	2+G	Leads Multiple	20.00	1922	1780	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	12.00	1,053	2+G	5-15P or L5-15P	N/A	N/A	N/A	
CO53R	57.00	59.25	3.13	Remote(Type I)	Circuit #1	110-120	1	60	1.22	52	2+G	Leads Multiple	20.00	2052	1900	750
				Remote(Type I)	Circuit #1	110-120	1	60	1.22	47	2+G	Leads Multiple	20.00	2052	1900	
				Remote(Type I)	Circuit #1	110-120	1	60	1.22	52	2+G	Leads Multiple	20.00	2052	1900	
				Remote(Type II)	Circuit #1	110-120	1	60	1.22	52	2+G	Leads Multiple	20.00	2419	2240	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	14.86	1,190	2+G	5-20P or L5-20P	N/A	N/A	N/A	
CO63R	69.00	71.25	34.50	Remote(Type I)	Circuit #1	110-120	1	60	1.56	75	2+G	Leads Multiple	20.00	2527	2340	850
				Remote(Type I)	Circuit #1	110-120	1	60	1.56	75	2+G	Leads Multiple	20.00	2527	2340	
				Remote(Type II)	Circuit #1	110-120	1	60	1.56	75	2+G	Leads Multiple	20.00	2981	2760	
				Self-Contained (R513A)	Circuit #1	110-120	1	60	15.20	1,211	2+G	5-20P or L5-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 33" Minimum entry door clearance required (w/out shipping skid)
- 3) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 4) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

