


- **FB3S-2R** 37"L x 43"D x 51-3/4"H
- **FB4S-3R** 50"L x 43"D x 51-3/4"H
- **FB5S-4R** 63"L x 43"D x 51-3/4"H
- **FB6S-5R** 76"L x 43"D x 51-3/4"H

Included

- Remote w/thermostat, solenoid & TXV
- 15-5/8" Toe kick
- Blue Fin coated coil
- Condiment pan support rails
- Electrical leads
- Integrated average product temperature of 40°F or less
- NOTE: Pans not supplied with case.
- NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs.
- One year parts & labor warranty
- Rail system for shims
- Rear wrapping board, white Sanalite®
- Stainless steel interior


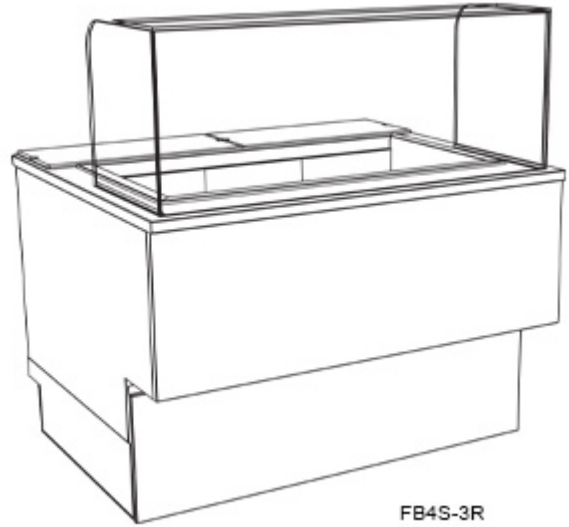


Specify	Standard Features	Additional Options
EXTERIOR COLOR	Laminated (non-premium) Confirm pattern/grain direction	- Laminated (premium) Confirm pattern/grain direction - Painted (stock colors, specify RAL#) - Stainless steel
COUNTER	Stainless steel	3 cm. Quartz
REAR STORAGE	Non-refrigerated rear storage (w/o doors)	- Non-refrigerated rear storage w/ sliding doors - Refrigerated rear storage w/ sliding doors
TOE KICK	Painted - Black	Stainless steel
SNEEZE GUARD	Clear sneeze guard glass w/ stainless steel posts	UV bonded frameless glass (3" glass gaps case-to-case)
REFRIGERATION	Remote w/thermostat, solenoid & TXV	Note: Remote doesn't incl Conds unit. Floor drain reqd.
MISCELLANEOUS		Second year parts & labor warranty


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged refrigerated products	40

PLAN VIEW

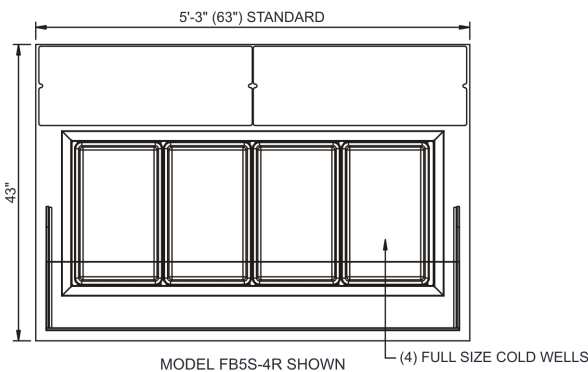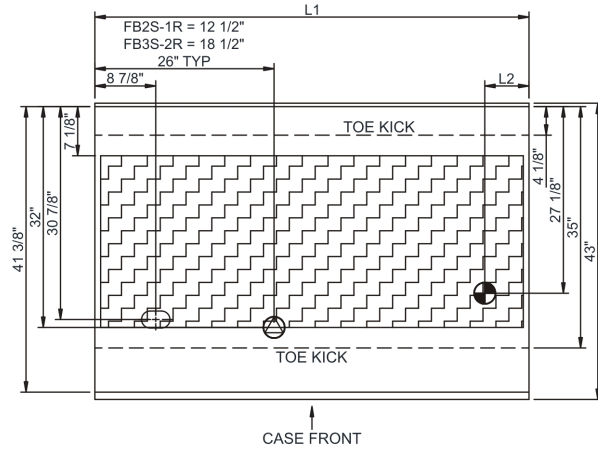

SIDE VIEW

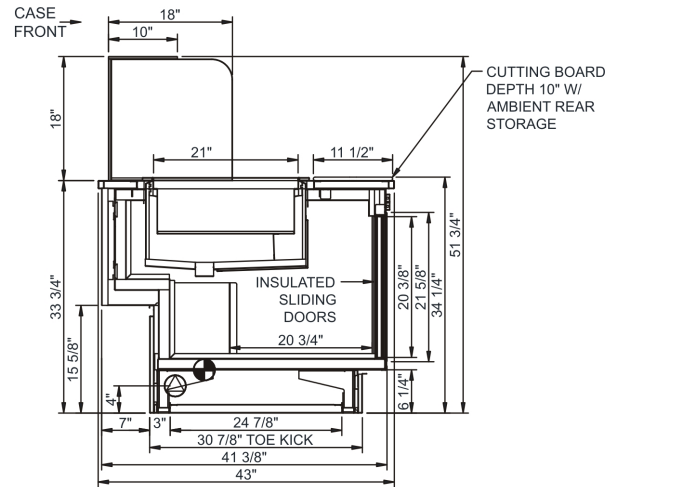

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
FB3S-2R	N/A	37.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.06	104	2+G	Leads Multiple	20.00	1123	1040	600
FB4S-3R	N/A	50.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.17	117	2+G	Leads Multiple	20.00	1296	1200	750
FB5S-4R	N/A	63.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.27	128	2+G	Leads Multiple	20.00	1469	1360	900
FB6S-5R	N/A	76.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.36	140	2+G	Leads Multiple		1642	1520	1,100
				Remote(Type I)	Circuit #1	110-120	1	60	1.36	140	2+G	Leads Multiple	20.00	1642	1520	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Note: Information is subject to change at any time. Visit www.structuralconcepts.com for the most current specs.

21876232

Revised 1-12-2022