

PTHC125G



60" x 23.63" x 23.75" (H x W x D)

Single chamber passive heating blanket warmer with a self-closing glass door, stainless steel interior, digital thermostat, stainless steel cabinet, and lock

Highlights:

Designed and assembled in the USA

No internal fans or moving parts ensure silent, safe, and efficient operation



Stainless steel construction inside and out for durable use and easy cleaning

Product Features:

| | |
|---------------------------------|--|
| 90 to 140°F temperature range | Designed and set to keep blankets warm in hospitals, medical and physical therapy offices, spas, and other facilities |
| Passive heating | Fixed heaters located at the bottom of the cabinet with no fans or moving parts to minimize lint buildup for safer, more efficient use |
| Digital thermostat | Electronic controls are conveniently located for easy temperature adjustment |
| Electronic readout | Large LED temperature display ensures your staff can easily monitor the interior temperature |
| Silent operation | No moving parts to ensure a quiet performance |
| Double pane tempered glass door | Heat-safe glass door offers a full view of stored contents, with a stainless steel door trim to highlight the interior |
| Professional handle | Stainless steel handle completes the professional look |
| Self-closing door | Door will automatically close when left ajar, preventing items from accidentally being left exposed to ambient temperatures |
| Stainless steel interior | Interior walls are constructed from stainless steel to ensure lasting durability and easy cleaning |

PTHC125G Specifications:

| Overview | |
|----------------------------|----------------------|
| Height of Cabinet | 60.0" (152 cm) |
| Width | 23.63" (60 cm) |
| Depth | 23.75" (60 cm) |
| Depth with Handle | 25.63" (65 cm) |
| Depth with door at 90° | 46.0" (117 cm) |
| Capacity | 10.57 cu.ft. (299 L) |
| Door | Glass |
| Cabinet | Stainless Steel |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Amps | 5.5 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 160.0 lbs. (73 kg) |
| Shipping Weight | 175.0 lbs. (79 kg) |
| Parts & Labor Warranty | 1 Year |
| UPC | 761101066127 |
| Warming Cabinet | |
| Door Swing | RHD |
| Reversible | No |
| Adjustable Shelves | Yes |
| Shelf Type | Chrome |
| Shelf Qty | 4 |
| Thermostat Type | Digital |
| Interior Height | 45.25" (115 cm) |
| Interior Width | 20.0" (51 cm) |
| Interior Depth | 16.5" (42 cm) |
| Dolly | Optional |
| Temperature Range | 90 to 140°F |

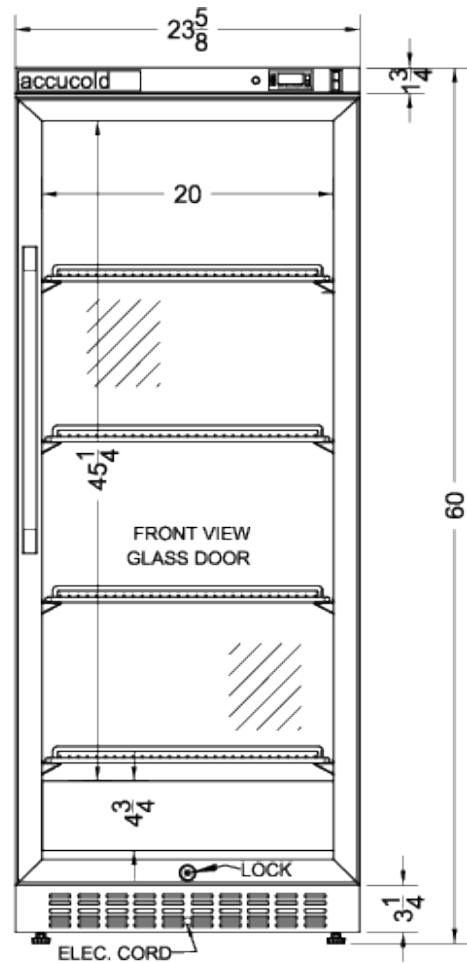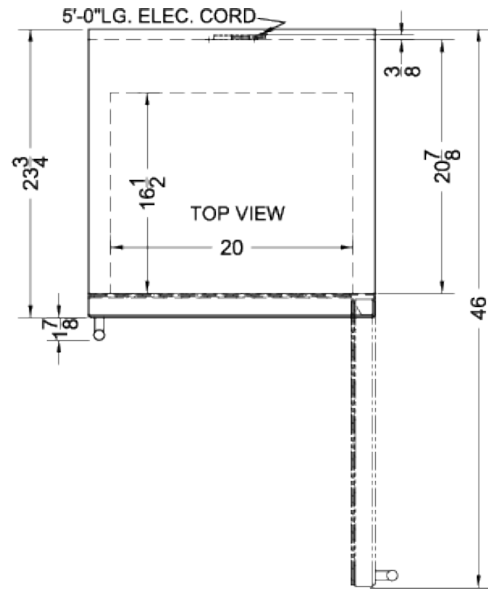

Puretherm Warming Cabinet