Tes


T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

B-0807

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

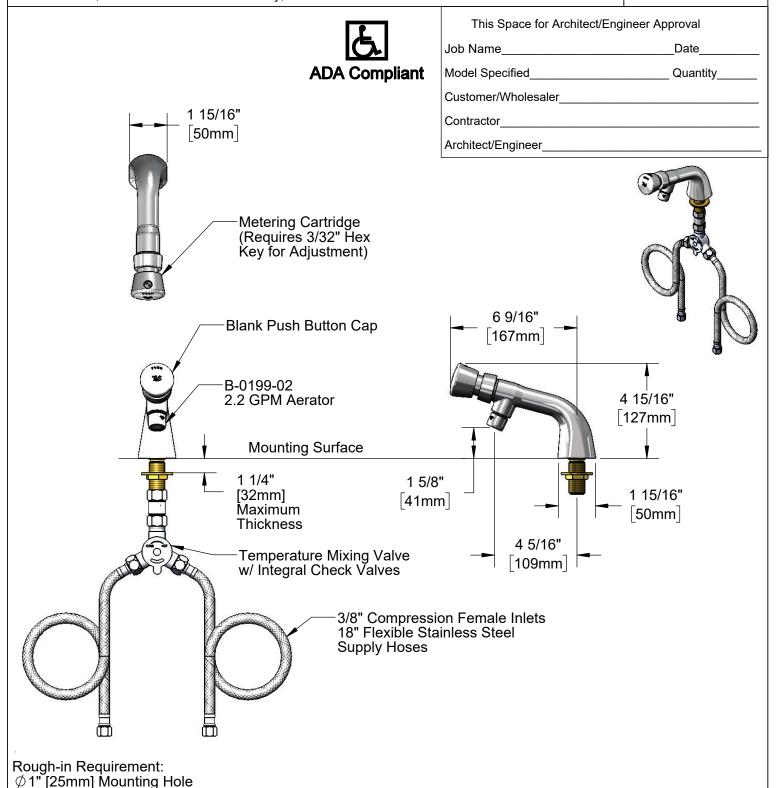

Product Specifications:

Single Hole, Single Temperature Deck Mount Faucet, Push Button Metering Cartridge, 2.2 GPM Aerator, Temperature Control Mixing Valve w/ Integral Check Valves & 18" Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA)

Drawn: KJG Checked: JRM Approved: JHB Date: 01/05/18 Scale: 1:5 Sheet: 1 of 2



T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

B-0807

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

ITEM	SALES NO.	DESCRIPTION				
NO.	0, (220) (0)					
1	238A	Push Button Metering Cartridge				
2	014193-40	Blank Push Cap Assembly				
3	238AB	Push Button Metering Cartridge w/ Push Button Cap				
4	001043-45	Washer				
5	044A	3/8" to Aerator Adapter				
6	B-0199-01	2.2 GPM Aerator, 55/64"-27 UN Female				
7	B-0199-02	2.2 GPM Male Aerator, Adaptor & Washer				
8	019321-40	Temperature Control Mixing Valve w/ Flexible 1/2" NPSM Male Inlets				
9	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM				
10	5EF-0006	Mechanical Mixing Valve				
11						
12	002954-45	Shank Lock Nut				
13	000999-45	Brass Lock Washer				

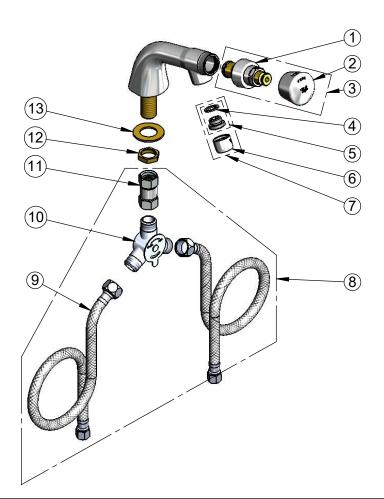

014734-45 #8 Spanner Bit

Product Specifications:

Single Hole, Single Temperature Deck Mount Faucet, Push Button Metering Cartridge, 2.2 GPM Aerator, Temperature Control Mixing Valve w/ Integral Check Valves & 18" Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA)

Drawn:	KJG	Checked:	JRM	Approved:	JHB	Date:	01/05/18	Scale:	NTS	Sheet: 2 of 2