Tes

Drawn:

GEF

Checked:

DMH

Approved:

JHB

Date:

05/07/14

Scale:

1:6

Sheet: 1

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3100

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

	0.4/4	This Space	e for Architect/Engir	neer Approval
	2 1/4" 56mm]	Job Name		Date
		Model Specified	<u> </u>	Quantity
2 1/2"	ADA Compliant	Customer/Whole	esaler	
[63mm]	ChekPoint*	Contractor		
T	ChekPoint*		eer	
.				
	3 5/8" x 4 3/16" x 2" Deep [92mm x 106mm x 51mm] Water Resistant Control Module Box w/ Internal Flow Control Setting Swith AC or DC Operated w/ (4) AA Batter Hardwire Capable using Terminals of	ches, ´ ies.	Rigid Go w/ 2.2 Gl Vandal R	oseneck PM [8.3 L/min] Resistant Aerator
	Caption Sensor Cable Removable	7 5/16"	-	11" [279mm] - 4 1/8" [105mm]
	Strainer	[185mm]		
W ye .	Mounting / Surface	• •		
1/2" NPSM x 1/4" NPSM— 18" [457mm] Long Flexible Stainless Steel Hose		2 1/4" [57mm] Maximum Thickness	— ↓ `	 ∅ 1/8" [3mm] Anti-rotation Pin. Remove Pin if Desired. (See Mounting Hole Detail)
	W.D. (F	00-240 VAC Ada / 144" [3658mm] ouble Power Co Remove Rubber o Module and Ca Connect)] Long rd. Plugs	Mounting Hole Detail
Temperature Mixing Valve w/ Integral Check Valves	—(2) 3/8" C 18" [457n Supply H	ompression x 1/ nm] Flexible Sta ose	/2" NPSM inless Steel	√ 5/32" [4mm]
Product Specifications:	trania Equat: Dook Mount Digid	P	Product Compliance:	
Gooseneck w/ VR Aerator, Internal Flow Control Settir	tronic Faucet: Deck Mount Rigid AC/DC Control Module with ng Switches, Temperature Control neck Valves, 18" Long Hot & Cold ector Hoses	N N A	SME A112.18.1 / C ISF 61 - Section 9 ISF 372 (Low Lead NSI A117.1 (ADA) JL 1951	



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.


EC-3100

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ITEM NO.	SALES NO.	DESCRIPTION	
1	B-0199-06	VR Aerator w/ Key	
2	044A	3/8" to Aerator Adapter	
3	006575-45	-015 O-Ring	
4	017195-45	Angled Sensor w/ Cable	
5	016297-45	Inlet Hose, Faucet, 1/2" NPSM-F x 1/4" NPSM-F	
6	5EF-0006	Mechanical Mixing Valve	
7	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM	
8	015425-45	Vandal Resistant Key	
9	016647-45	ChekPoint Module (Blue)	
10	5EF-0002	A/C Transformer	
11	EC-FILTER	Replacement Filter	

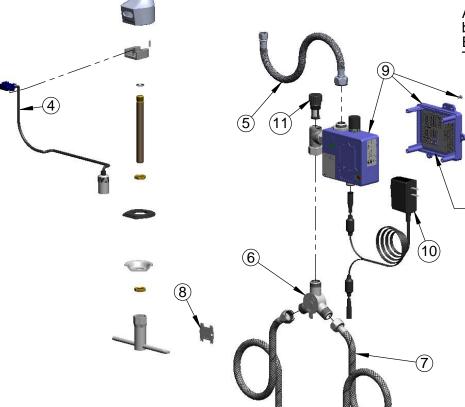

A Maximum of (8) ChekPoint Faucets can be Hardwire Connected and Powered by EC-HARDWIRE ChekPoint Hardwire AĆ Transformer. (Sold Separately)

Label for Flow Control Switch Settings is Located on Inside of Back Cover.

Flow Control Switches are Located Inside Module Housing in Black Box Next to Battery Compartment.
*Switches are Set to DEFAULT Position:

- - Auto Time Out = 15 Seconds
 - Shut Off Delay = 1 Second
 - Auto Flush = ÓFF

Remove (4) Screws and Back Cover to Access Switches.

*Available Water Flow Control Selections:

- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
- Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

Product Specifications:

Chrome Plated Brass Electronic Faucet: Deck Mount Rigid Gooseneck w/ VR Aerator, AC/DC Control Module with Internal Flow Control Setting Switches, Temperature Control Mixing Valve w/ Integral Check Valves, 18" Long Hot & Cold Supply Stop Flexible Connector Hoses

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn:	GEF	Checked:	DMH	Approved:	JHB	Date:	05/07/14	Scale:	NTS	Sheet: 2 of 2