



EKFA 412 N M

FOUR-TRAY, HALF-SIZE COUNTERTOP CONVECTION
MANUAL CONTROLS, WITH BROILER



Maximum cooking capacity in a small space

Lateral supports for 4 trays at 2 ²⁹/₃₂" pitch

(4) 13" x 18" grids included

Temperature range 200 to 500° F

Top, bottom and rear heating elements

Eight cooking modes

Stainless-steel cooking chamber

Bottom control panel - manual

Bi-directional fan

High-performance oven insulation

High-efficiency motor and fan

Recessed door gasket

Bottom-hinged, dual-paned glass door

Internal glass designed to facilitate easy cleaning

Timed or infinite cooking mode

Internal halogen light

Conforms to the following standards:

- Standard safety UL 197
- CSA C 22.2 No. 109:2017
- Sanitation NSF / ANSI 4-2020



Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A.
August 2024

EKFA 412 N M

DIMENSIONS

NET

Width	23.62 in	30 in
Depth	27.91 in	26 in
Height	25.72 in	23 in
Weight	106 lb	117 lb

UTILITY CONNECTIONS


All utility connections should be within three feet of the centerline of the back of the oven when installed.

ELECTRICAL

Power:	2750-2900W
Frequency:	60Hz
Voltage (AC):	208/240v (single-phase)
Current:	11.5-13.0A
NEMA Plug:	6-20P (included)
Breaker size:	20A (recommended)

AVAILABLE OPTIONS AND ACCESSORIES

Table - standard height (31.14")	EKTAS 412
Table - w/casters (34.76")	EKTARS 412
13" x 18" half-size chrome grid	EKGAHS
13" x 18" half-size stainless-steel grid	EKGAHSX

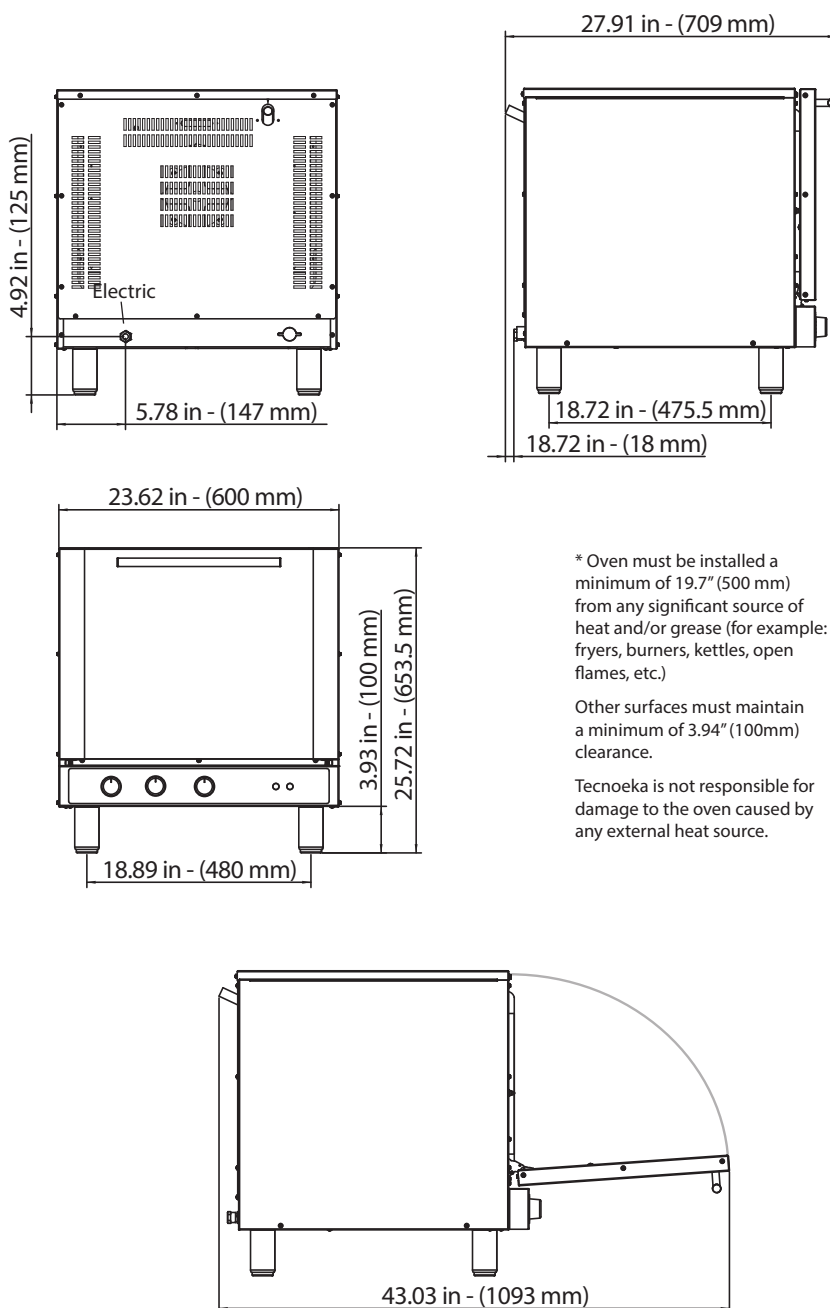

Tecnoeka, Inc.
3385 Denver Drive
Denver, North Carolina 28037

Web Site: www.tecnoeka.com
E-mail: info.usa@tecnoeka.com
Toll Free: 888-626-EKA1 (3521)



Printed in the U.S.A
August 2024