

Project		
AIA #	SIS #	
Item #	Quantity	C.S.I. Section 114000



# **G-SERIES**

# 2-Section Refrigerator Pass-Thru Self-Contained Hinged Glass & Solid Door Combinations



(shown with solid doors)



This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

### **AVAILABLE CONFIGURATIONS**

Model	Control Side	Non Control Side
	Door Style/Hinging	Door Style/Hinging
G26004P	Solid Half/Left-Right	Glass Half/Left-Right
G26005P	Solid Half/Left-Left	Glass Half/Left-Left
G26006P	Solid Half/Right-Left	Glass Half/Right-Left
G26007P	Solid Half/Right-Right	Glass Half/Right-Right
G26014P	Solid Full/Left-Right	Glass Full/Left-Right
G26015P	Solid Full/Left-Left	Glass Full/Left-Left
G26016P	Solid Full/Right-Left	Glass Full/Right-Left
G26017P	Solid Full/Right-Right	Glass Full/Right-Right
G27004P	Glass Half/Left-Right	Solid Half/Left-Right
G27005P	Glass Half/Left-Left	Solid Half/Left-Left
G27006P	Glass Half/Right-Left	Solid Half/Right-Left
G27007P	Glass Half/Right-Right	Solid Half/Right-Right
G27014P	Glass Full/Left-Right	Solid Full/Left-Right
G27015P	Glass Full/Left-Left	Solid Full/Left-Left
G27016P	Glass Full/Right-Left	Solid Full/Right-Left
G27017P	Glass Full/Right-Right	Solid Full/Right-Right

### STANDARD PRODUCT FEATURES

- High Performance, Energy Efficient Refrigeration System
- Reliable Microprocessor Control With LED Temperature Display
- Evaporator Coil Outside Food Zone Provides More Usable Space
- Load-Sure Guard Prevents Problems From Improper Loading
- Durable All-Metal Construction
- Stainless Steel Front & Louver Panel, Triple Pane Glass Door &
   Stainless Steel Door, Anodized Aluminum Sides & Interior
- Full or Half Height Door Models with a Variety of Hinging Configurations
- Long Life EZ-Clean Door Gaskets
- Three (3) Epoxy Coated Shelves Per Section (factory installed)
- Easy to Maintain Front Facing Condenser Coil
- 6" High Locking Casters
- Guaranteed for Life Door Handles (Solid Door Only) & Hinges
- 3-Year Parts & Labor Warranty
- 2-Years Additional Compressor Parts Warranty

#### ACCESSORIES & OPTIONS (\*field installed)

- Tray Slides for 18" x 26" Sheet Pans\*
- Tray Slides for 12" x 20" Food Pans\*
- Tray Slides for 14" x 18" Sheet Pans\*
- Tray Slides for 18" x 26, 12" x 20" & 14" x 18" Pans\*
- Additional Shelves\*
- 6" High Legs\*
- Lower Height Casters\*

\*Please refer to form number TR35872 for precise kit details. See back page for tray slide versatility chart.

SECTION 4-2


Approved by\_\_\_\_\_\_ Date\_\_\_\_\_ Date\_\_\_\_\_ Date\_\_\_\_\_





# **MODELS**

Half Height Door Models Solid & Glass Door Combinations: G26004P, G26005P, G26006P, G26007P Half Height Door Models Glass & Solid Door Combinations: G27004P, G27005P, G27006P, G27007P



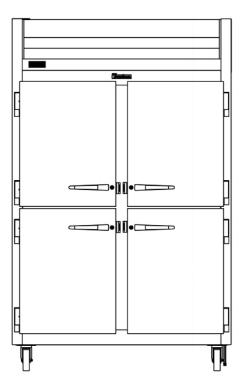

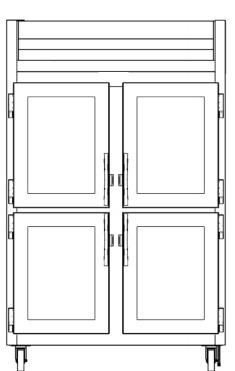

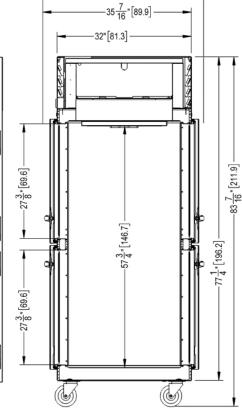


-38<del>-7</del>"[98.5]-

# **G26004P Control Side**

Solid Door Hinged Left-Right Shown (other door combinations & hinging available)

# **G26004P Non Control Side**

Glass Door Hinged Left-Right Shown (other door combinations & hinging available)

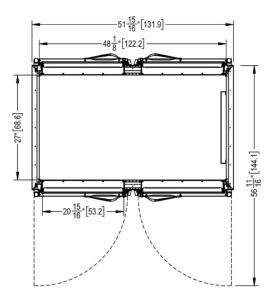


2-Section Refrigerator Pass-Thru


**Self-Contained Hinged Glass & Solid Door Combinations** 


CLICK
TRANSFER
For KCL CADalog Website

# **MODELS**

Full Height Door Models Solid & Glass Door Combinations: G26014P, G26015P, G26016P, G26017P
Full Height Door Models Glass & Solid Door Combinations: G27014P, G27015P, G27016P, G27017P

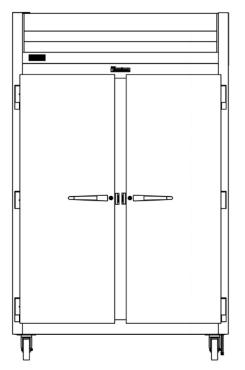

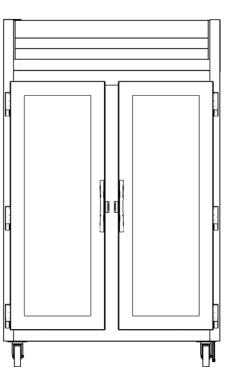

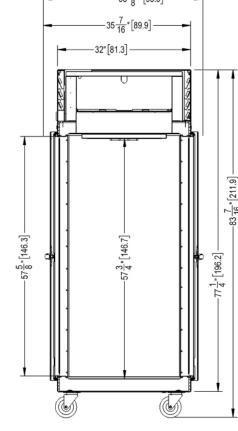


# **G26014P Control Side**

Solid Door Hinged Left-Right Shown (other door combinations & hinging available)

# **G26014P Non Control Side**

Glass Door Hinged Left-Right Shown (other door combinations & hinging available)

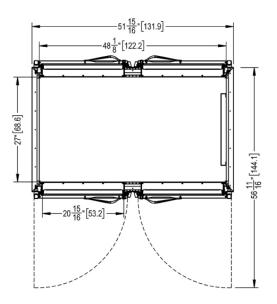



# 2-Section Refrigerator Pass-Thru

# Self-Contained Hinged Glass & Solid Door Combinations

#### **MODELS**

Half Height Door Models Solid & Glass Door Combinations: G26004P, G26005P, G26006P, G26007P
Half Height Door Models Glass & Solid Door Combinations: G27004P, G27005P, G27006P, G27007P
Full Height Door Models Solid & Glass Door Combinations: G26014P, G26015P, G26016P, G26017P
Full Height Door Models Glass & Solid Door Combinations: G27014P, G27015P, G27016P, G27017P

MODELS	G260P & G270P				
DIMENSIONAL DATA					
Net Capacity cu. ft. <sup>1</sup>	49.22 (1393.7 l)   49.75 (1408.8 l)				
L x D x H - Overall in. <sup>2</sup>	521/8 (132.4 cm) x 3715/16 (96.4 cm) x 837/16 (211.9 cm)				
Depth - over body in.	32 (81.3 cm)				
Depth - door open 90° in.	83¾ (146.3 cm)				
Clear half-door W x H in.	21½ (53.6 cm) x 27½ (69.9 cm)				
Clear full-door W X H in.	21½ (53.6 cm) x 57½ (146.3 cm)				
No. Standard Shelves	6				
Shelf Area sq. ft. <sup>3</sup>	34.6 (3.21 sq m)				
ELECTRICAL DATA					
Voltage   Plug	115/60/1   NEMA 5-15P (attached)				
Feed wires with ground	3				
Full Load Amperes   MDEC <sup>4</sup>	9.6   5.54 KWH/Day				
REFRIGERATION DATA					
Refrigerant	R-450A				
Refrigerant Charge Amount	24 oz				
BTU/HR   H.P. <sup>5</sup>	4610   3/4 HP				
Required Clearance	12" Above				
SHIPPING DATA					
L x D x H Crated in.	62 (157 cm) x 42 (107 cm) x 85 (216cm)				
Volume Crated cu. ft.	128 (3625 เ)				
Uncrated   Crated Weight lbs.	514 (233 kg)   574 (260 kg)				

## **EQUIPMENT SPECIFICATIONS**

#### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, louver assembly and doors are constructed of stainless steel. Cabinet sides (including returns), interior and door liners are constructed of anodized aluminum. The exterior cabinet top and bottom are constructed of heavy gauge galvanized steel. A set of four (4) 6" (15 cm) high casters are included.

Doors are equipped with removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature at 120°. An external switch is provided to activate the interior LED lighting.

Gasket profile and durable long life material simplify cleaning and increase overall gasket life. Anti-condensate heaters are located behind each door opening.

The cabinet is insulated with an average of 2" (5 cm) thick high density, non-CFC, foamed in place polyurethane.

#### **SELF-CONTAINED REFRIGERATION SYSTEM**

A top mounted, self-contained, refrigeration system using environmentlly friendly, non-flammable R-450A refrigerant is conveniently located behind the one piece louver assembly. It features an easy to clean front facing condenser, thermostatic expansion valve, air-cooled hermetic compressor, large, high humidity evaporator coil located outside the food zone and a top mounted non-electric condensate evaporator. A 9' (2.7 m) NEMA cord and 15-5P plug is provided. Standard operating temperature is 34° to 38°F (1° to 3°C)

#### CONTRO

The easy to use water resistant microprocessor control system is supplied standard. It includes a 3-Digit LED Display with both a Fahrenheit or Celsius Temperature Scale Display Capability

#### INTERIOR ARRANGEMENTS

Standard interior arrangements include three (3) epoxy coated wire shelves per section, mounted on shelf pins, installed at the factory. Shelves are full-width, and do not have any large gaps between them requiring the use of "bridge" or "junior shelves." Recommended load limit per shelf should not exceed 225 lbs. (102kg).

#### **DOMESTIC WARRANTY**

Both a three year parts and labor warranty and a five year compressor warranty (self-contained models only) are provided standard.

### NOTES:

- 1. Net Capacity cu. ft. = Half Height Door | Full Height Door models.
- 2. Height shown when mounted on standard 6" high casters.
- 3. Figure shown reflects the area of standard shelf compliment.
- 4. MDEC = Maximum Daily Energy Consumption
- 5. Based on a 90°F ambient and 20°F evaporator.

OPTIONAL ACCESSORY TRAY SLIDE VERSATILITY CHART							
TRAY SLIDE DRAWINGS							
TRAY SLIDE OFFERING	#1 (1) 18" x26" or (2) 14"x18"	#4 (Rod Type) (1) 18" x26"	Universal (1) 18" x26" or (2) 14"x18" or (2) 12"x20"	#1 EZ-Change [1] 18" x26" or (2) 14"x18"	Universal EZ-Change [1] 18" x26" or [2] 14"x18" or (2] 12"x20"	HD Universal EZ-Change (1) 18" x26" or (2) 14"x18" or (2) 12"x20"	
SPACING CAPACITY DOOR SIZE	2" 28 Pairs Full Door & 13 Half 3" 19 Pairs Full Door & 09 Half 4" 14 Pairs Full Door & 07 Half 5" 11 Pairs Full Door & 05 Half	(2 Pair) 1 1/2" 18 Pairs Half Door	4" 14 Pairs Full Door & 06 Half <sup>1</sup> 4" 14 Pairs Full Door & 07 Half <sup>2</sup> 5" 11 Pairs Full Door & 05 Half 6" 09 Pairs Full Door & 04 Half	2" 26 Pairs Full Door & 12 Half 4" 13 Pairs Full Door & 06 Half	2 1/4" 22 Pairs Full Door & 11 Half 4 1/2" 11 Pairs Full Door & 05 Half	4 1/2" 11 Pairs Full Door & 05 Half 9" 05 Pairs Full Door & 02 Half	

- Upper Half Height Door<sup>1</sup>
- Lower Half Height Door<sup>2</sup>