

Project			
AIA #	SIS #		
Item #	Quantity	C.S.I. Section 114000	

G-SERIES - R290 3-Section Refrigerator Reach-In

Self-Contained Solid Door(s)





Many models are ENERGY STAR[®] listed. Please refer to www.energystar.gov to view the most up-to-date product listing and performance data.





This unit is listed to the applicable UL, CSA and NSF Standards by an approved NRTL. Consult the factory or unit's data plate for approval information.

AVAILABLE CONFIGURATIONS

Half-Height Door Models G30000-032

G30001-032 G30002-032 G30003-032

Full-Height Door Models

G30010-032 G30011-032 G30012-032 G30013-032 Hinging Left/Right/Right Left/Left/Right Right/Right/Right Left/Left/Left

Left/Right/Right

Right/Right/Right

Left/Left/Right

Left/Left/Left

Hinging

STANDARD PRODUCT FEATURES

- High Performance, Energy Efficient Refrigeration System
- Reliable Microprocessor Control With LED Temperature Display
- Evaporator Coil Outside Food Zone Provides More Usable Space
- Load-Sure Guard Prevents Problems From Improper Loading
- Durable All Metal Construction
- Stainless Steel Front & Doors, Anodized Aluminum Sides & Interior
- Full or Half Height Door Models with a Variety of Hinging Configurations
- Long Life EZ Clean Door Gaskets
- Three (3) Epoxy Coated Shelves Per Section (factory installed)
- Easy to Maintain Front Facing Condenser Coil
- 6" High Locking Casters
- Guaranteed for Life Door Handles & Hinges
- 3-Year Parts & Labor Warranty
- 2-Years Additional Compressor Parts Warranty

ACCESSORIES & OPTIONS (*field installed)

- Tray Slides for 18" x 26" Sheet Pans*
- Tray Slides for 12" x 20" Food Pans*
- Tray Slides for 14" x 18" Sheet Pans*
- Tray Slides for 18" x 26, 12" x 20" & 14" x 18" Pans*
- Additional Shelves*
- 6" High Legs*
- Lower Height Casters*

*Please refer to form number TR35872 for precise kit details. See back page for tray slide versatility chart.

Date

Approved by


Date



MODELS

Half Height Door Models: G30000-032, G30001-032, G30002-032, G30003-032



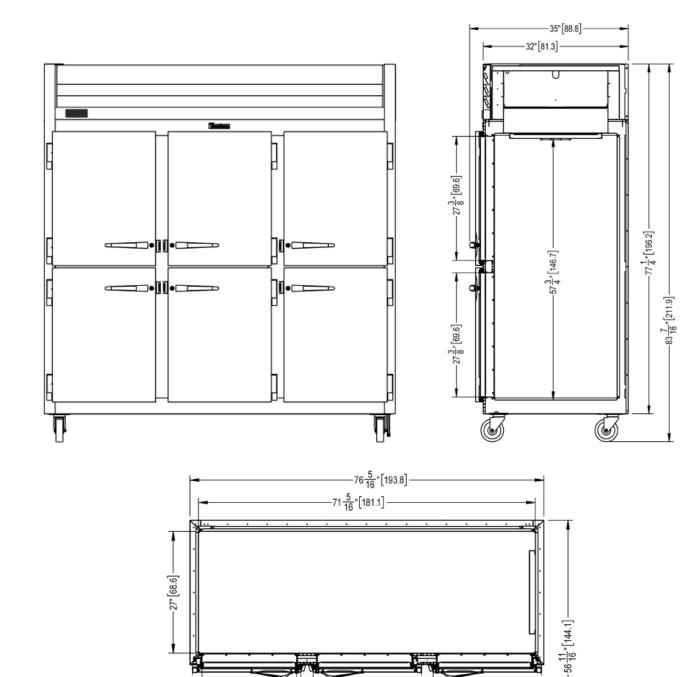


-20<u>15</u>"[53.2]

G-SERIES - R290 3-Section Refrigerator Reach-In

Self-Contained Solid Door(s)

MODELS

Full Height Door Models: G30010-032, G30011-032, G30012-032, G30013-032

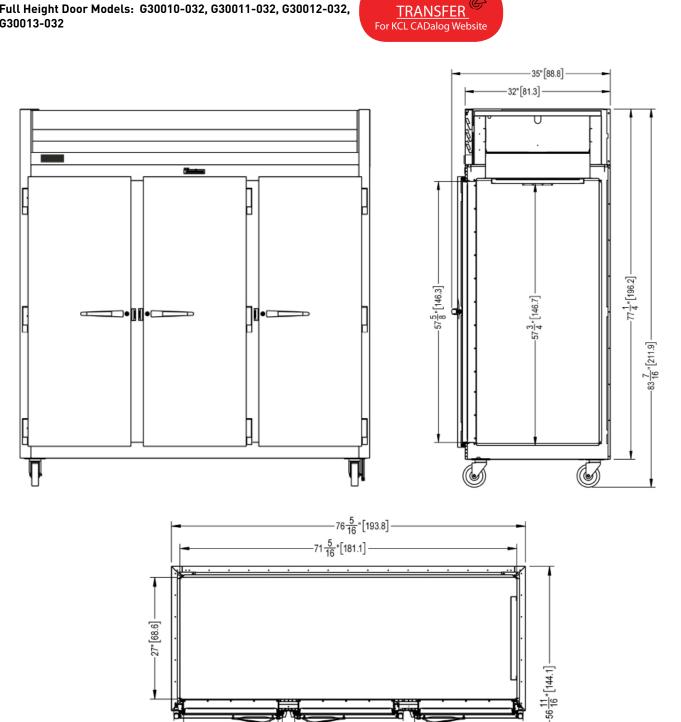

-20¹⁵/₁₆"[53.2]



MODELS

Half Height Door Models: G30000-032, G30001-032, G30002-032, G30003-032

Full Height Door Models: G30010-032, G30011-032, G30012-032, G30013-032

MODELS	G300				
DIMENSIONAL DATA					
Net Capacity cu. ft. ¹	69.15 (1958 l) 69.35 (1964 l)				
L x D x H - Overall in. ²	76 ⁵ /16 (193.8 cm) x 35 (88.8 cm) x 83 ⁷ /16 (211.9 cm)				
Depth - over body in.	32 (81.3 cm)				
Depth - door open 90º in.	57% (146.3 cm)				
Clear half-door W x H in.	21½ (53.6 cm) x 27½ (69.9 cm)				
Clear full-door W X H in.	21¼ (53.6 cm) x 57½ (146.3 cm)				
No. Standard Shelves	9				
Shelf Area sq. ft. ³	51.9 (4.82 sq m)				
ELECTRICAL DATA					
Voltage Plug	115/60/1 NEMA 5-15P (attached)				
Feed wires with ground	3				
Full Load Amperes MDEC ⁴	8.4 3.37 KWH/Day				
REFRIGERATION DATA					
Refrigerant	R-290A				
BTU/HR H.P.⁵	4610 1/2 HP				
Required Clearance	12" Above				
MDEC	3.37 3.38				
SHIPPING DATA					
L x D x H Crated in.	91(231 cm) x 42 (107 cm) x 85(216 cm)				
Volume Crated cu. ft.	188 (5324 l)				
Uncrated Crated Weight lbs.	610 (277 kg) 630 (286 kg)				

NOTES:

1. Net Capacity cu. ft. = Half Height Door | Full Height Door models.

2. Height shown when mounted on standard 6" high casters.

3. Figure shown reflects the area of standard shelf compliment.

4. MDEC = Maximum Daily Energy Consumption

5. Based on a 90°F ambient and 20°F evaporator. F

G-SERIES - R290 3-Section Refrigerator Reach-In

Self-Contained Solid Door(s)

EQUIPMENT SPECIFICATIONS

CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, louver assembly and door(s) are constructed of 20 gauge stainless steel. Cabinet sides (including returns), interior and door liners are constructed of anodized aluminum. The exterior cabinet top, back and bottom are constructed of heavy gauge galvanized steel. A set of four (4) 6" high locking casters are included. Doors are equipped with a gasket protecting, raised metal door pan, cylinder locks, and guaranteed for life self-closing cam-lift hinges with a stay open feature at 120 degrees. Hinges include a concealed switch to automatically activate the interior LED lighting. Guaranteed for life, metal work flow door handles are mounted horizontally over recess in door which limits protrusion into aisle ways. Gasket profile and durable long life material simplify cleaning and increase overall gasket life. Anti condensate heaters are located behind each door opening. Both the cabinet and door(s) are insulated with an average of 2" thick high density, non-CFC, 100% foamed in place polyurethane.

SELF-CONTAINED REFRIGERATION SYSTEM

A top mounted, self-contained, balanced refrigeration system using R-290A refrigerant is conveniently located behind the one piece louver assembly. It features an easy to clean front facing condenser, thermostatic expansion valve metering device, aircooled hermetic compressor, large, high humidity evaporator coil located outside the food zone and a top mounted non-electric condensate evaporator. A 9' cord and plug is provided. Standard operating temperature is 34 to 38°F.

CONTROL

The easy to use water resistant microprocessor control is supplied standard. It includes a 3-Digit LED Display, and a Fahrenheit or Celsius Temperature Scale Display Capability.

INTERIOR ARRANGEMENTS

Standard interior arrangements include three [3] epoxy coated steel wire shelves per section, mounted on shelf pins, installed at the factory. Shelves are full-width, and do not have any large gaps between them requiring the use of "bridge" or "junior shelves." Recommended load limit per shelf should not exceed 225 lbs.

DOMESTIC WARRANTY

Both a three year parts and labor warranty and an additional two year compressor parts warranty (for a total of five on self-contained models) are provided standard.

OPTIONAL ACCESSORY TRAY SLIDE VERSATILITY CHART							
TRAY SLIDE DRAWINGS							
TRAY SLIDE OFFERING	#1 (1) 18" x26" or (2) 14"x18"	#4 (Rod Type) (1) 18″ x26″	Universal (1) 18" x26" or (2) 14"x18" or (2) 12"x20"	#1 EZ-Change (1) 18" x26" or (2) 14"x18"	Universal EZ-Change (1) 18" x26" or (2) 14"x18" or (2) 12"x20"	HD Universal EZ-Change (1) 18" x26" or (2) 14"x18" or (2) 12"x20"	
SPACING CAPACITY DOOR SIZE	2" 28 Pairs Full Door & 13 Half 3" 19 Pairs Full Door & 09 Half 4" 14 Pairs Full Door & 07 Half 5" 11 Pairs Full Door & 05 Half	(2 Pair) 1 1/2" 18 Pairs Half Door	4" 14 Pairs Full Door & 06 Half ¹ 4" 14 Pairs Full Door & 07 Half ² 5" 11 Pairs Full Door & 05 Half 6" 09 Pairs Full Door & 04 Half	2" 26 Pairs Full Door & 12 Half 4" 13 Pairs Full Door & 06 Half	2 1/4" 22 Pairs Full Door & 11 Half 4 1/2" 11 Pairs Full Door & 05 Half	4 1/2" 11 Pairs Full Door & 05 Half 9" 05 Pairs Full Door & 02 Half	

Upper Half Height Door¹

Lower Half Height Door²

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.